

ADAPTERS, IN-SERIES

2.4mm

DC - 50 GHz



MODELS: 5148, 5149 & 5150

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 50 GHz

VSWR

DC - 18 GHz _____ 1.10:1 Max.

18 - 26.5 GHz _____ 1.20:1 Max.

26.5 - 50 GHz _____ 1.30:1 Max.

Impedance _____ 50 Ohms


Operating Temp Range _____ -65°C to +125°C

Mechanical:


Connectors _____ Passivated Stainless Steel

Conductors _____ Gold Plated Beryllium Copper


Model Number: **5150**
Male/Female Connectors

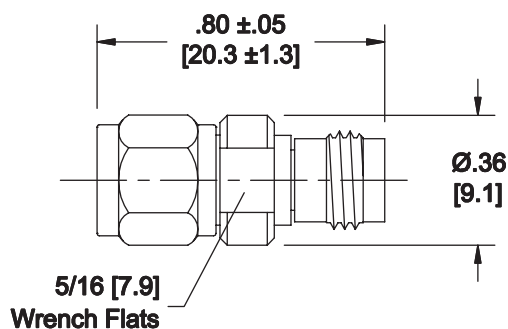

Model Number: **5149**
Male/Male Connectors

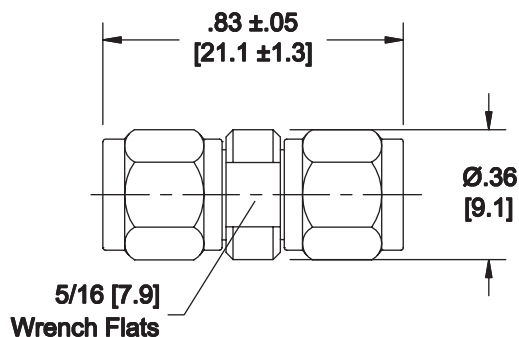

Model Number: **5148**
Female/Female Connectors

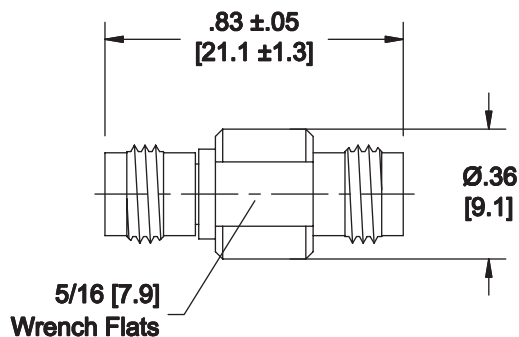

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Units featuring very low return loss (VSWR) are also available.

5150; REV B