

6MBP100TEA060

FE e-Front runners

Econo IPM series

600V / 100A 6 in one-package

■ Features

- Temperature protection provided by directly detecting the junction temperature of the IGBTs
- Low power loss and soft switching
- High performance and high reliability IGBT with overheating protection
- Higher reliability because of a big decrease in number of parts in built-in control circuit



■ Maximum ratings and characteristics

● Absolute maximum ratings(at Tc=25°C unless otherwise specified)

Item	Symbol	Rating		Unit
		Min.	Max.	
Bus voltage	DC	VDC	0	450
	Surge	VDC(surge)	0	500
	Short operating	Vsc	200	400
Collector-Emitter voltage *1	Vces	0	600	V
Inverter	Collector current DC	Ic	-	100
	1ms	Icp	-	200
	Duty=72.3% *2	-Ic	-	100
	Collector power dissipation	Pc	-	347
Supply voltage of Pre-Driver *4	Vcc	-0.5	20	V
Input signal voltage *5	Vin	-0.5	Vcc+0.5	V
Input signal current	In	-	3	mA
Alarm signal voltage *6	VALM	-0.5	Vcc	V
Alarm signal current *7	IALM	-	20	mA
Junction temperature	Tj	-	150	°C
Operating case temperature	Topr	-20	100	°C
Storage temperature	Tstg	-40	125	°C
Solder temperature *8	Tsol	-	260	°C
Isolating voltage (Terminal to base, 50/60Hz sine wave 1min.)	Viso	-	AC2500	V
Screw torque	Mounting (M5)	-	3.5	N·m

Note

*1 : Vces shall be applied to the input voltage between terminal P and U or ,u or W, N and U or V or W

*2 : 125°C/FWD Rth(j-c)/(Ic x VF MAX)=125/0.665/(100 x 2.6) x 100=72.3%

*3 : Pc=125°C/IGBT Rth(j-c)=125/0.36=347W [Inverter]

*4 : VCC shall be applied to the input voltage between terminal No.4 and 1, 8 and 5, 12 and 9, 14 and 13

*5 : Vin shall be applied to the input voltage between terminal No.3 and 1, 7 and 5, 11 and 9, 16,17,18 and 13.

*6 : VALM shall be applied to the voltage between terminal No.2 and 1, No6 and 5, No10 and 9, No.19 and 13.

*7 : IALM shall be applied to the input current to terminal No.2,6,10 and 19.

*8 : Immersion time 10±1sec.

● Electrical characteristics (at $T_c=T_j=25^\circ C$, $V_{cc}=15V$ unless otherwise specified.)

Main circuit

Item	Symbol	Condition		Min.	Typ.	Max.	Unit
Inverter	ICES	$V_{ce}=600V$ V_{in} terminal open.		-	-	1.0	mA
	$V_{ce(sat)}$	$I_c=100A$	Terminal	-	-	2.3	V
			Chip	-	1.8	-	
Forward voltage of FWD	V_F	$-I_c=100A$	Terminal	-	-	2.6	V
			Chip	-	1.6	-	
Turn-on time	t_{on}	$V_{dc}=300V, T_j=125^\circ C$		1.2	-	-	μs
Turn-off time	t_{off}	$I_c=100A$ Fig.1, Fig.6		-	-	3.6	
Reverse recovery time	t_{rr}	$V_{dc}=300V, I_c=100A$ Fig.1, Fig.6		-	-	0.3	
Maximum Avalanche Energy (A non-repetition)	P_{AV}	Internal wiring inductance=50nH Main circuit wiring inductance=54nH		100	-	-	mJ

● Control circuit

Item	Symbol	Condition		Min.	Typ.	Max.	Unit
Supply current of P-line side pre-driver(one unit)	I_{ccp}	Switching Frequency : 0 to 15kHz $T_c=-20$ to $125^\circ C$ Fig.7		-	-	18	mA
Supply current of N-line side pre-driver	I_{ccn}			-	-	65	mA
Input signal threshold voltage (on/off)	$V_{in(th)}$	ON		1.00	1.35	1.70	V
		OFF		1.25	1.60	1.95	V
Input zener voltage	V_z	$R_{in}=20k\ ohm$		-	8.0	-	V
Alarm signal hold time	t_{ALM}	$T_c=-20^\circ C$ Fig.2		1.1	-	-	ms
		$T_c=25^\circ C$ Fig.2		-	2.0	-	ms
		$T_c=125^\circ C$ Fig.2		-	-	4.0	ms
Current limit resistor	R_{ALM}	Alarm terminal		1425	1500	1575	ohm

● Protection Section ($V_{cc}=15V$)

Item	Symbol	Condition		Min.	Typ.	Max.	Unit
Over Current Protection Level of Inverter circuit	I_{oc}	$T_j=125^\circ C$		150	-	-	A
Over Current Protection Delay time	t_{POC}	$T_j=125^\circ C$		-	5	-	μs
SC Protection Delay time	t_{SC}	$T_j=125^\circ C$ Fig.4		-	-	8	μs
IGBT Chip Over Heating	T_{jOH}	Surface of IGBT chips		150	-	-	$^\circ C$
Over Heating Protection Hysteresis	T_{jH}			-	20	-	$^\circ C$
Under Voltage Protection Level	V_{UV}			11.0	-	12.5	V
Under Voltage Protection Hysteresis	V_H			0.2	0.5	-	V

● Thermal characteristics($T_c=25^\circ C$)

Item	Symbol	Min.	Typ.	Max.	Unit
Junction to Case thermal resistance *10	Inverter	$R_{th(j-c)}$	-	-	$^\circ C/W$
		$R_{th(j-c)}$	-	-	$^\circ C/W$
Case to fin thermal resistance with compound	$R_{th(c-f)}$	-	0.05	-	$^\circ C/W$

*10 : (For 1 device, Case is under the device)

● Noise Immunity ($V_{dc}=300V, V_{cc}=15V$, Test Circuit Fig.5)

Item	Condition	Min.	Typ.	Max.	Unit
Common mode rectangular noise	Pulse width 1 μs , polarity ± 10 minuets Judge : no over-current, no miss operating	± 2.0	-	-	kV
Common mode lightning surge	Rise time 1.2 μs , Fall time 50 μs Interval 20s, 10 times Judge : no over-current, no miss operating	± 5.0	-	-	kV

● Recommendable value

Item	Symbol	Min.	Typ.	Max.	Unit
DC Bus Voltage	V_{dc}	-	-	400	V
Operating Supply Voltage of Pre-Driver	V_{cc}	13.5	15.0	16.5	V
Screw torque (M5)	-	2.5	-	3.0	Nm

● Weight

Item	Symbol	Min.	Typ.	Max.	Unit
Weight	Wt	-	270	-	g

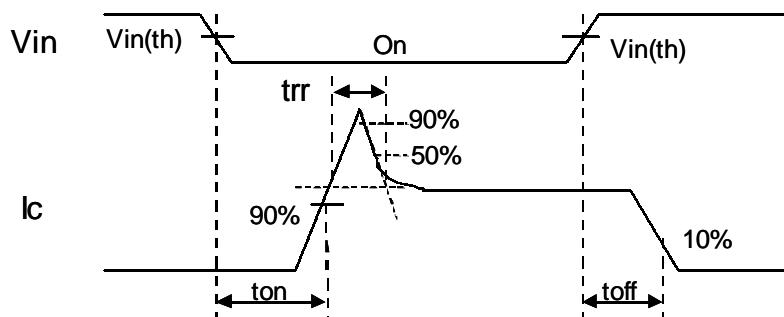


Figure 1. Switching Time Waveform Definitions

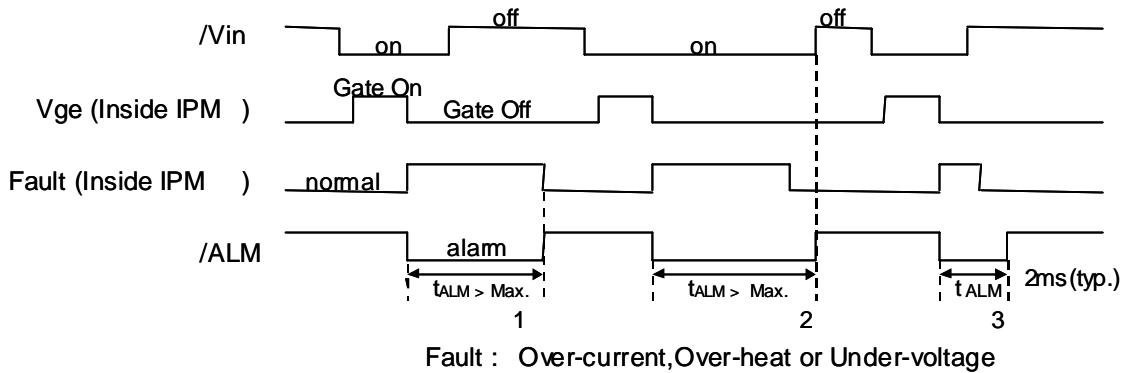


Figure 2. Input/Output Timing Diagram

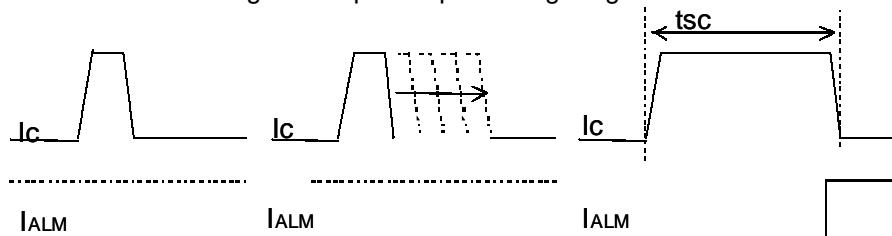


Figure 4 Definition of tsc

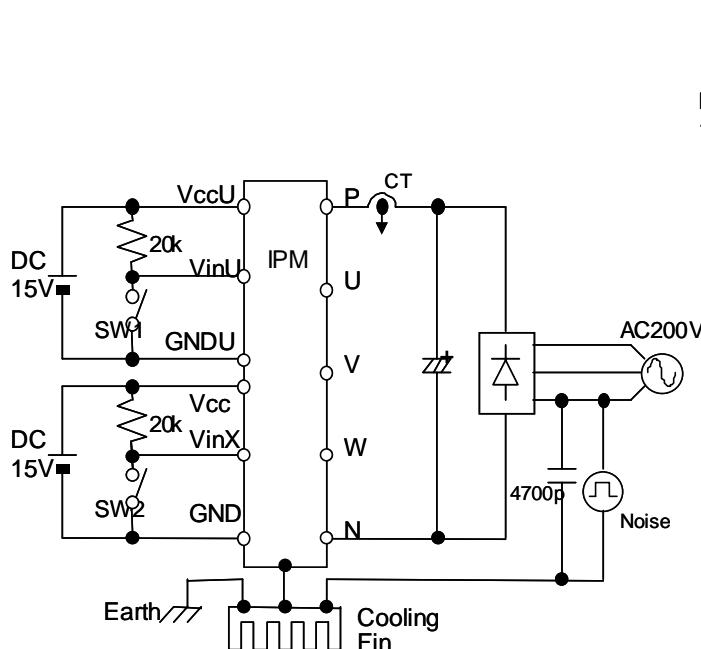


Figure 5. Noise Test Circuit

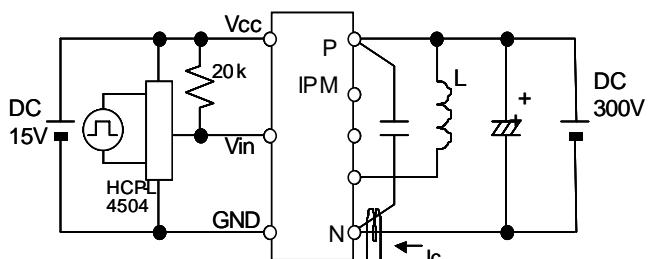


Figure 6. Switching Characteristics Test Circuit


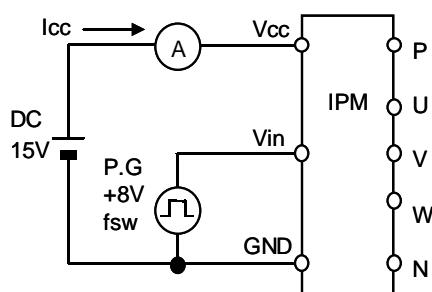


Figure 7. Icc Test Circuit


■ Block diagram

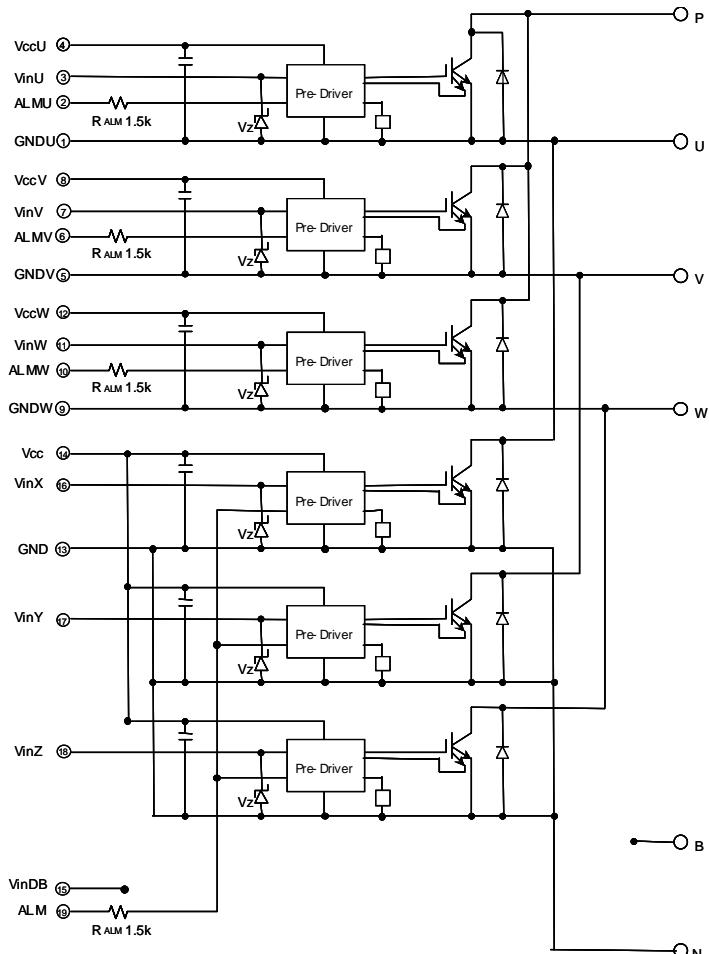

Pre-drivers include following functions







1. Amplifier for driver
2. Short circuit protection
3. Under voltage lockout circuit
4. Over current protection
5. IGBT chip over heating protection

■ Outline drawings, mm

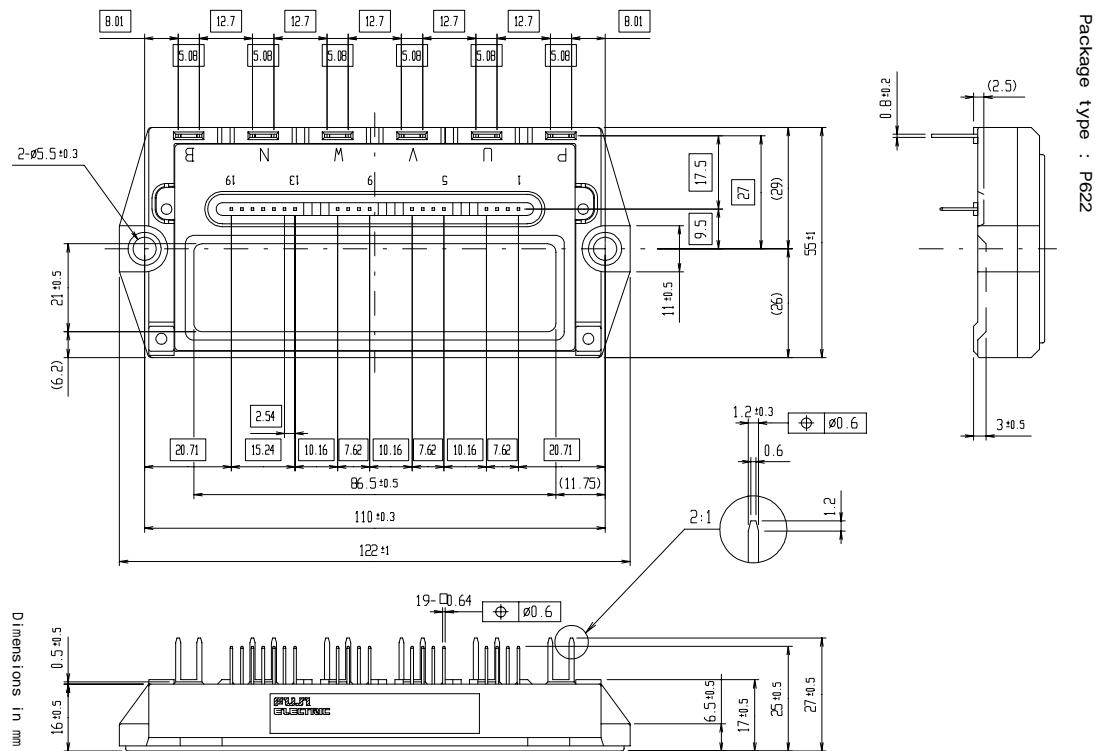

■ Characteristics

● Control circuit characteristics (Representative)

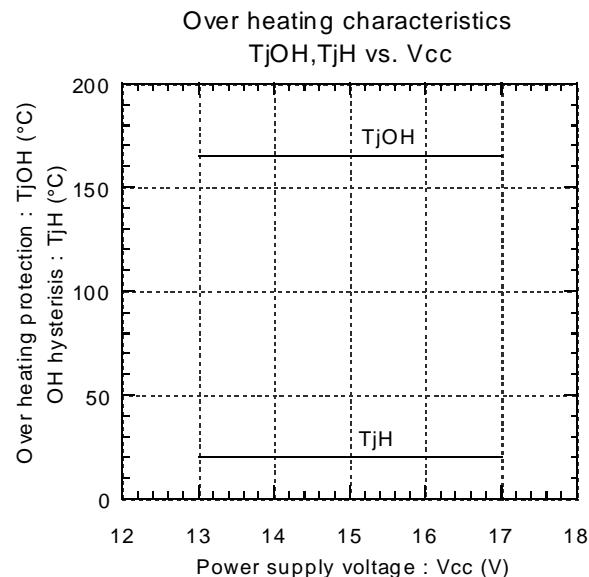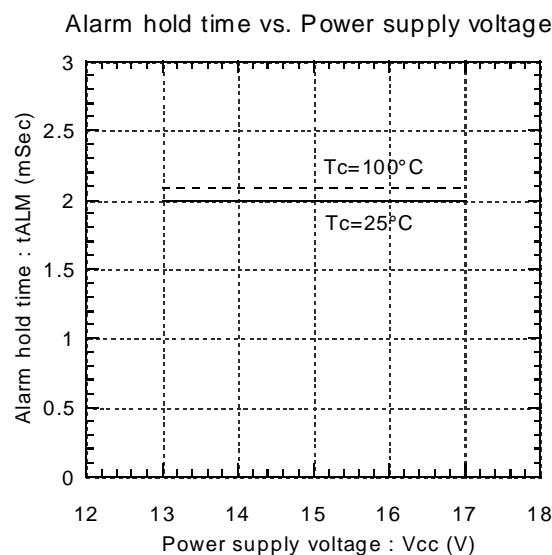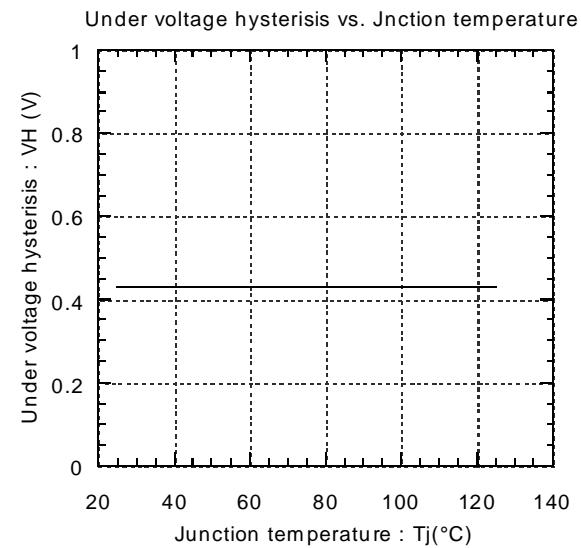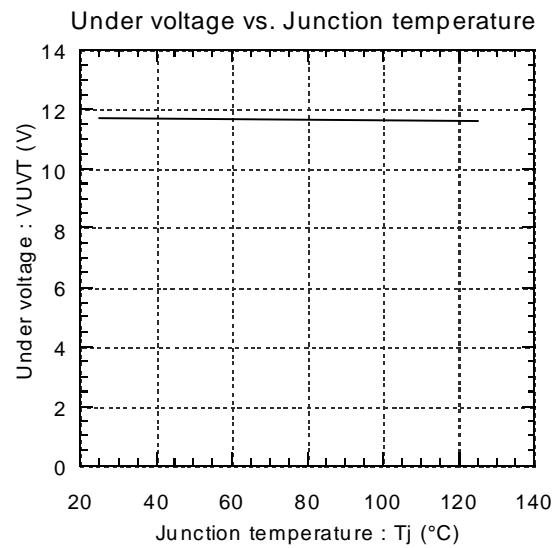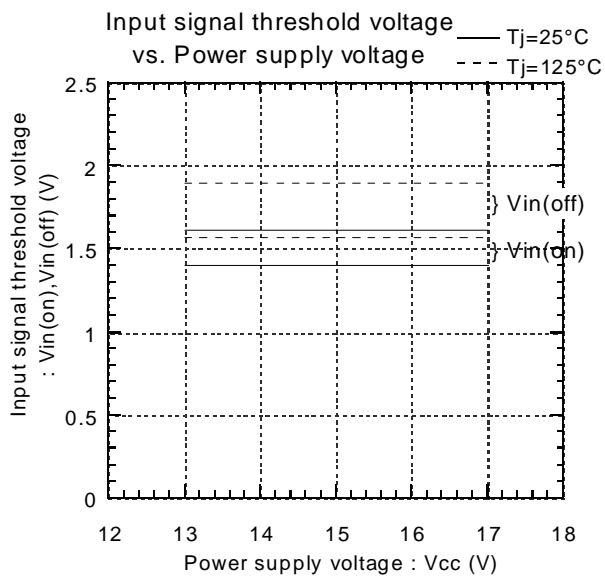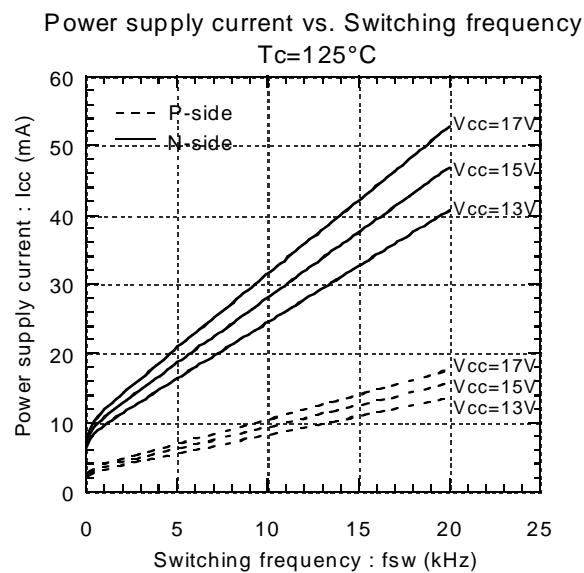

● Main circuit characteristics (Representative)

