


6MBP150RTB060

IPM-R3 series

600V / 150A 6 in one-package

■ Features

- Temperature protection provided by directly detecting the junction temperature of the IGBTs
- Low power loss and soft switching
- High performance and high reliability IGBT with overheating protection
- Higher reliability because of a big decrease in number of parts in built-in control circuit

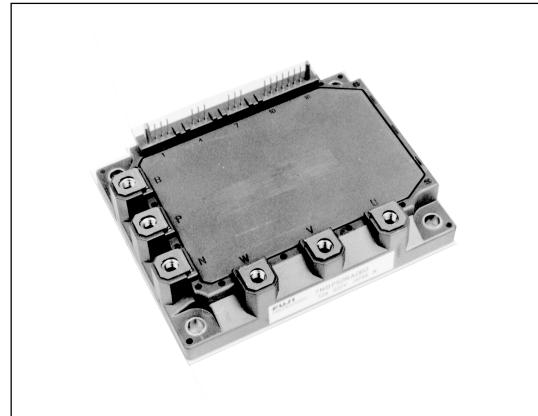

■ Maximum ratings and characteristics

● Absolute maximum ratings(at Tc=25°C unless otherwise specified)

| Item | Symbol | Rating | | Unit |
|----------------------------------------------|----------------------|--------|---------|------------|
| | | Min. | Max. | |
| DC bus voltage | VDC | 0 | 450 | V |
| DC bus voltage (surge) | VDC(surge) | 0 | 500 | V |
| DC bus voltage (short operating) | Vsc | 200 | 400 | V |
| Collector-Emitter voltage | Vces *1 | 0 | 600 | V |
| INV | Collector current DC | Ic | - | 150 A |
| | 1ms | ICP | - | 300 A |
| | Duty=68.2% | -Ic *2 | - | 150 A |
| Collector power dissipation | One transistor | Pc *3 | - | 431 W |
| Junction temperature | Tj | - | 150 | °C |
| Input voltage of power supply for Pre-Driver | Vcc *4 | -0.5 | 20 | V |
| Input signal voltage | Vin *5 | -0.5 | Vcc+0.5 | V |
| Input signal current | Iin | - | 3 | mA |
| Alarm signal voltage | VALM *6 | -0.5 | Vcc | V |
| Alarm signal current | IALM *7 | - | 20 | mA |
| Storage temperature | Tstg | -40 | 125 | °C |
| Operating case temperature | Topr | -20 | 100 | °C |
| Isolating voltage (Case-Terminal) | Viso *8 | - | AC2.5 | kV |
| Screw torque | Mounting (M5) | | - | 3.5 *9 N·m |
| | Terminal (M5) | | - | 3.5 *9 N·m |

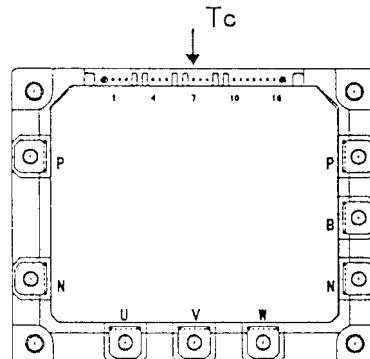


Fig.1 Measurement of case temperature

*1 : Vces shall be applied to the input voltage between terminal P and U or V or W, N and U or V or W.

*2 : 125°C/FWD Rth(j-c)/(Ic x VF MAX)=125/0.47/(150 x 2.6)x100=68.2%

*3 : Pc=125°C/IGBT Rth(j-c)=125/0.29=431W [Inverter]

*4 : Vcc shall be applied to the input voltage between terminal No. 3 and 1, 6 and 4, 9 and 7, 11 and 10.

*5 : Vin shall be applied to the input voltage between terminal No. 2 and 1, 5 and 4, 8 and 7, 13,14,15 and 10.

*6 : VALM shall be applied to the voltage between terminal No. 16 and 10.

*7 : IALM shall be applied to the input current to terminal No. 16.

*8 : 50Hz/60Hz sine wave 1 minute.

*9 : Recommendable Value : 2.5 to 3.0 N·m

● Electrical characteristics (at $T_c=T_j=25^\circ C$, $V_{cc}=15V$ unless otherwise specified.)

Main circuit

| Item | Symbol | Condition | | Min. | Typ. | Max. | Unit |
|------------------------------------------------|---------------------------------------|------------------------------------------------------------------------|------------------------------------------|----------|------|------|------|
| INV | Collector current at off signal input | I _{CES} | V _{CE} =600V Vin terminal open. | - | - | 1.0 | mA |
| | Collector-Emitter saturation voltage | V _{CE(sat)} | I _C =150A | Terminal | - | 2.3 | V |
| | | | Chip | - | 1.8 | - | |
| Forward voltage of FWD | V _F | -I _C =150A | Terminal | - | - | 2.6 | V |
| | | | Chip | - | 1.6 | - | |
| Turn-on time | ton | V _{DC} =300V, $T_j=125^\circ C$ | | 1.2 | - | - | μs |
| Turn-off time | toff | IC=150A Fig.1, Fig.6 | | - | - | 3.6 | |
| Reverse recovery time | trr | V _{DC} =300V, IC=150A Fig.1, Fig.6 | | - | - | 0.3 | |
| Maximum Avalanche Energy (A non-repetition) | P _{AV} | Internal wiring inductance=50nH Main circuit wiring inductance=54nH | | 170 | - | - | mJ |

● Control circuit

| Item | Symbol | Condition | | Min. | Typ. | Max. | Unit |
|----------------------------------------------------|---------------------|----------------------------------------------------------------------|---|------|------|------|------|
| Supply current of P-line side pre-driver(one unit) | I _{CCP} | Switching Frequency : 0 to 15kHz $T_c=-20$ to $125^\circ C$ Fig.7 | - | - | 18 | mA | |
| Supply current of N-line side pre-driver | I _{CCN} | | - | - | 65 | mA | |
| Input signal threshold voltage (on/off) | V _{in(th)} | ON | | 1.00 | 1.35 | 1.70 | V |
| | | OFF | | 1.25 | 1.60 | 1.95 | V |
| Input zener voltage | V _Z | R _{IN} =20k ohm | | - | 8.0 | - | V |
| Alarm signal hold time | t _{ALM} | T _c =-20°C Fig.2 | | 1.1 | - | - | ms |
| | | T _c =25°C Fig.2 | | - | 2.0 | - | ms |
| | | T _c =125°C Fig.2 | | - | - | 4.0 | ms |
| Limiting resistor for alarm | R _{ALM} | | | 1425 | 1500 | 1575 | ohm |

● Protection Section ($V_{cc}=15V$)

| Item | Symbol | Condition | | Min. | Typ. | Max. | Unit |
|---------------------------------------------------|------------------|-----------------------------------------------------------|--|------|------|------|------|
| Over Current Protection Level of Inverter circuit | I _{OC} | T _j =125°C | | 225 | - | - | A |
| Over Current Protection Delay time | t _{POC} | T _j =125°C | | - | 5 | - | μs |
| SC Protection Delay time | t _{SC} | T _j =125°C Fig.4 | | - | - | 8 | μs |
| IGBT Chip Over Heating | T _{jOH} | surface of IGBT chips | | 150 | - | - | °C |
| Over Heating Protection Hysteresis | T _{jH} | V _{DC} =0V, I _C =0A, Case temperature | | - | 20 | - | °C |
| Over Heating Protection Temperature Level | T _{COH} | | | 110 | - | 125 | °C |
| Over Heating Protection Hysteresis | T _{CH} | | | - | 20 | - | |
| Under Voltage Protection Level | V _{UV} | | | 11.0 | - | 12.5 | V |
| Under Voltage Protection Hysteresis | V _H | | | 0.2 | 0.5 | - | |

● Thermal characteristics($T_c=25^\circ C$)

| Item | Symbol | Min. | Typ. | Max. | Unit |
|----------------------------------------------|----------------------|----------------------|------|------|------|
| Junction to Case thermal resistance | INV | R _{th(j-c)} | - | 0.29 | °C/W |
| | | R _{th(j-c)} | - | 0.47 | °C/W |
| Case to fin thermal resistance with compound | R _{th(c-f)} | - | 0.05 | - | °C/W |

● Noise Immunity ($V_{DC}=300V$, $V_{cc}=15V$, Test Circuit Fig.5)

| Item | Condition | Min. | Typ. | Max. | Unit |
|-------------------------------|---------------------------------------------------------------------------------------------------------|------|------|------|------|
| Common mode rectangular noise | Pulse width 1μs, polarity ±10minuets Judge : no over-current, no miss operating | ±2.0 | - | - | kV |
| Common mode lightning surge | Rise time 1.2μs, Fall time 50μs Interval 20s, 10 times Judge : no over-current, no miss operating | ±5.0 | - | - | kV |

● Recommendable value

| Item | Symbol | Min. | Typ. | Max. | Unit |
|----------------------------------------|-----------------|------|------|------|------|
| DC Bus Voltage | V _{Dc} | - | - | 400 | V |
| Operating Supply Voltage of Pre-Driver | V _{cc} | 13.5 | 15.0 | 16.5 | V |
| Screw torque (M5) | - | 2.5 | - | 3.0 | Nm |

● Weight

| Item | Symbol | Min. | Typ. | Max. | Unit |
|--------|----------------|------|------|------|------|
| Weight | W _t | - | 450 | - | g |

*9 : (For 1 device, Case is under the device)

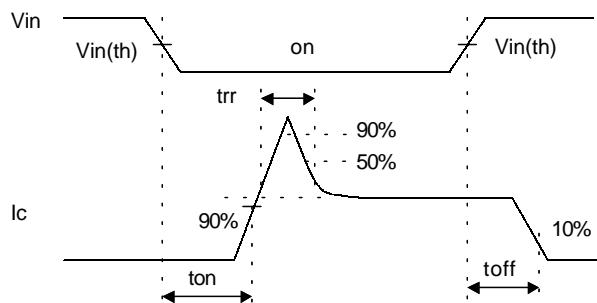


Figure 1. Switching Time Waveform Definitions

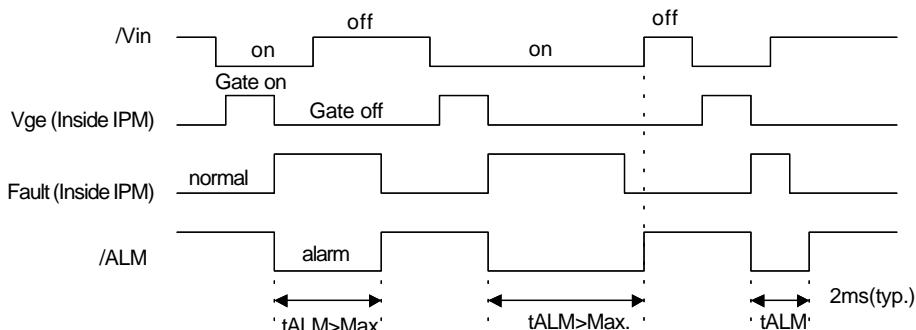


Figure 2. Input / Output Timing Diagram

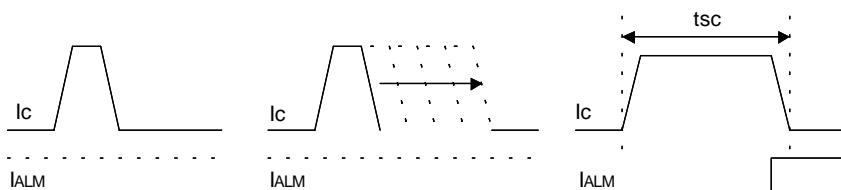


Figure. 4 Definition of tsc

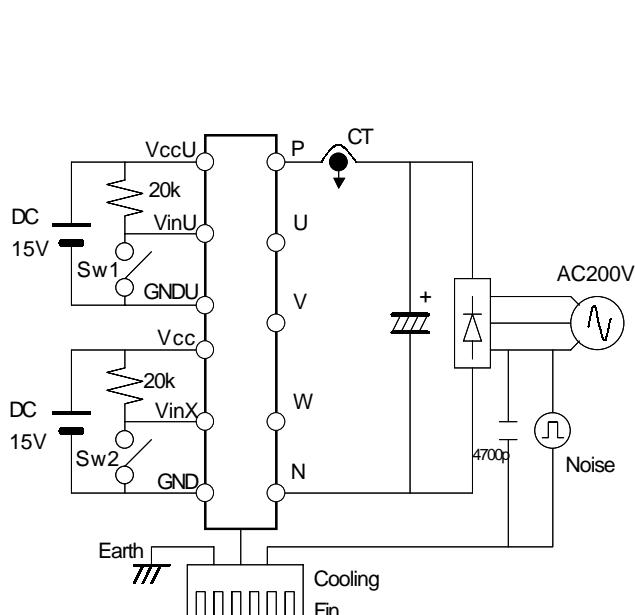


Figure 5. Noise Test Circuit

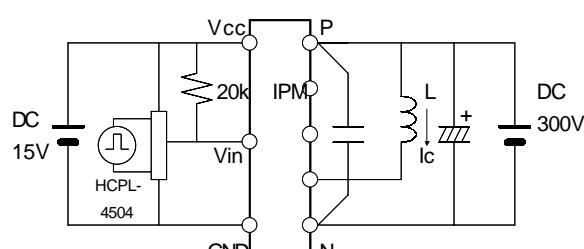


Figure 6. Switching Characteristics Test Circuit


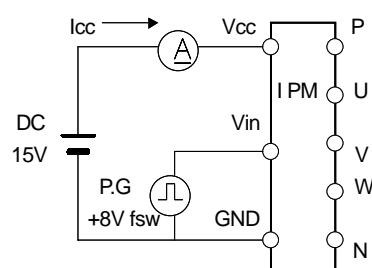



Figure 7. Icc Test Circuit

■ Block diagram

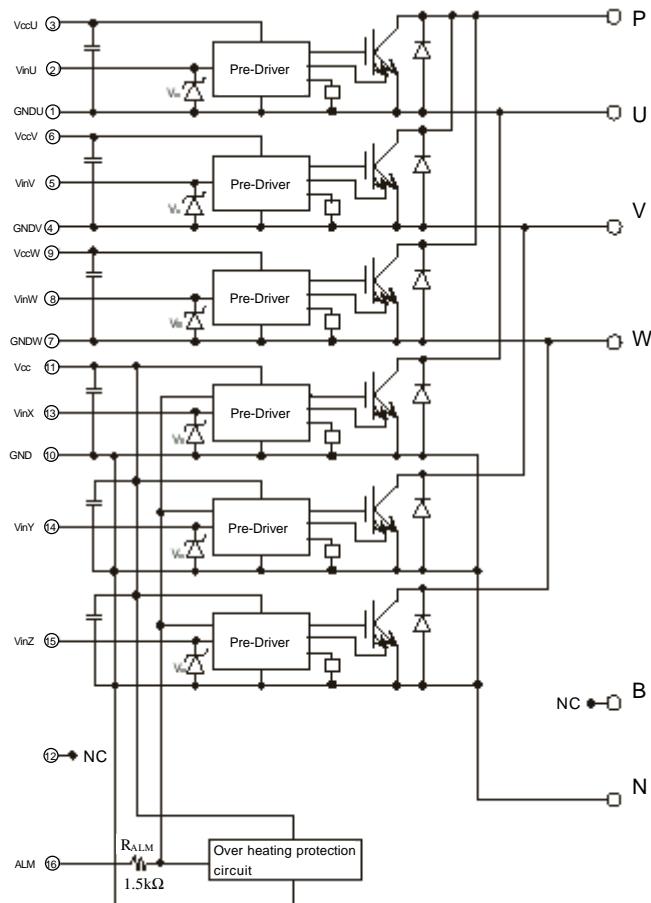

Pre-driver include following functions
 ① Amplifier for drive
 ② Short circuit protection
 ③ Under voltage lockout circuit
 ④ Over current protection
 ⑤ IGBT chip over heating protection







■ Outline drawings, mm

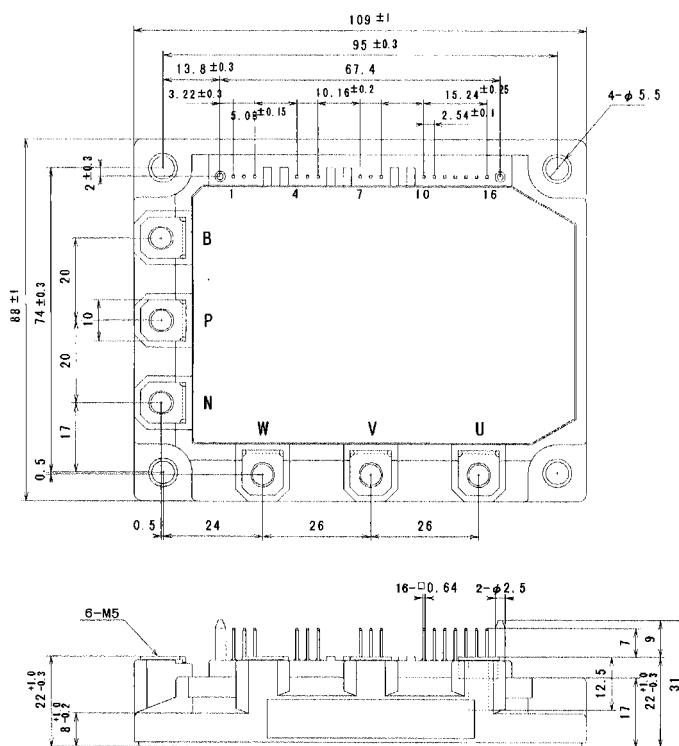

Mass : 450g

■ Characteristics

● Control circuit characteristics (Representative)

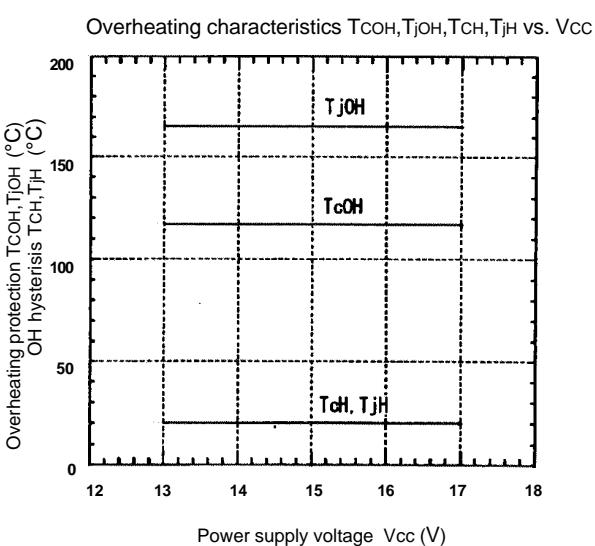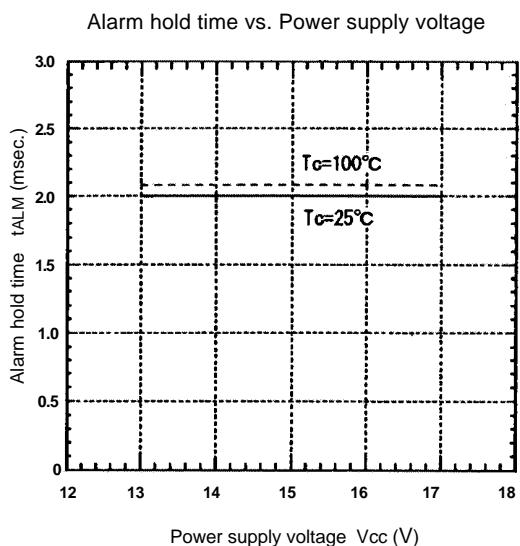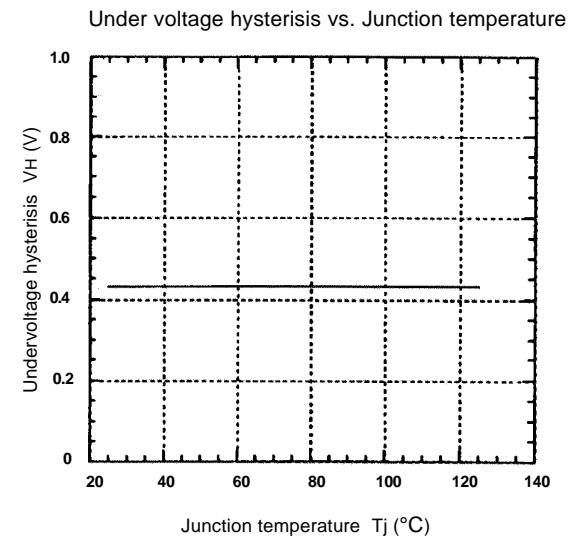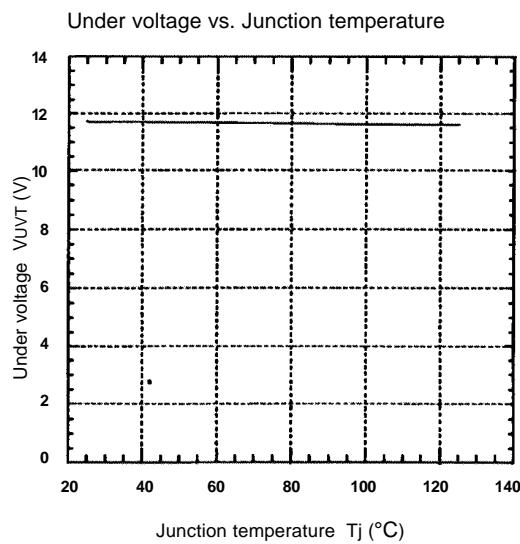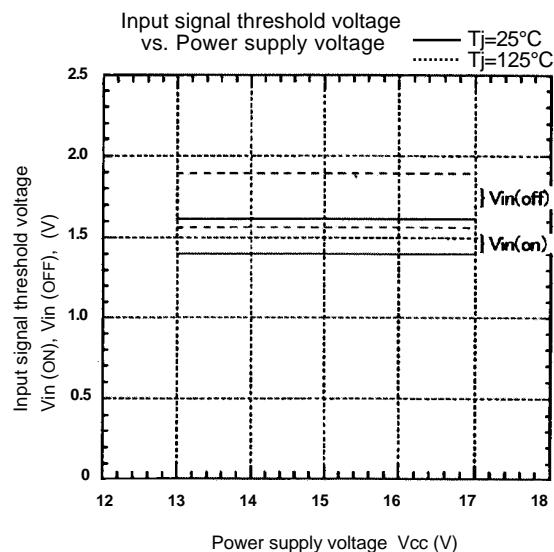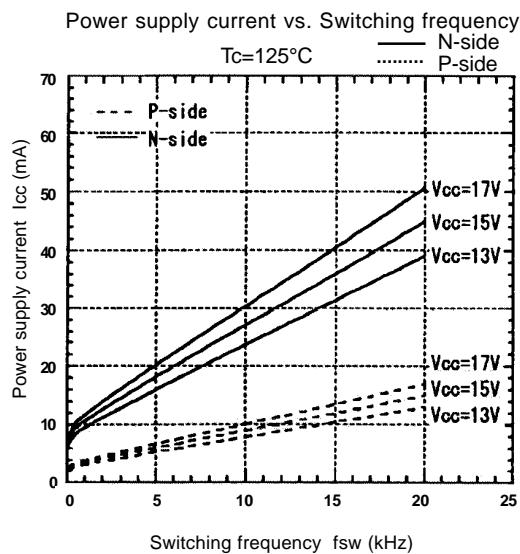

● Main circuit characteristics (Representative)

