

ADAPTERS, IN-SERIES

SMA

DC - 18 GHz
BULKHEAD MOUNT



MODELS: 5205, 5205/AU


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 18.0 GHz
VSWR _____
DC - 4 GHz _____ 1.05:1 Max.
4 - 8 GHz _____ 1.10:1 Max.
8 - 18 GHz _____ 1.15:1 Max.
Nominal Impedance _____ 50 Ohms
Operating Temp Range _____ -55°C to +125°C

Mechanical:

Connectors _____ See Below
(Mates with MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper
Nut & Washer: _____ Passivated Stainless Steel

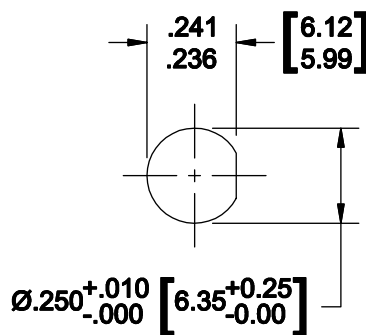



Recommended
Mounting Hole

Model Number: **5205**

Connectors _____ Passivated Stainless Steel

Model Number: **5205/AU**

Connectors _____ Gold Plated Stainless Steel

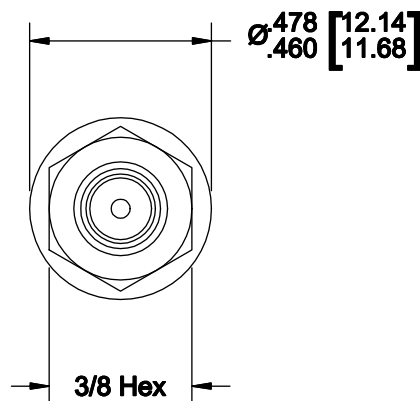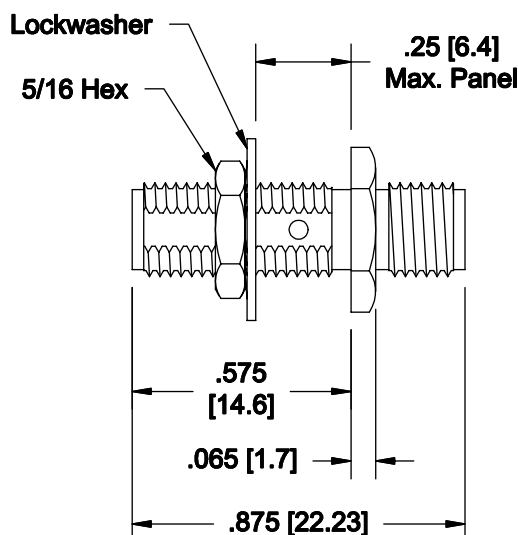

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5205; REV D