

7-Unit 400mA Darlington Transistor Array

IR2403

T-43-25

IR2403

7-Unit 400mA Darlington Transistor Array


Description

The IR2403 is a 7-circuit driver. This IC can be used for directly driving high output current relays and LED digital display devices.

Features


1. High output current, $I_{OUT} = 400\text{mA}$ (MAX.)
2. High output breakdown voltage
 $BV_{CEO} = 45\text{V}$ (MAX.)
3. Directly driven by MOS output
4. Darlington construction
5. 16-pin dual-in-line package

Pin Connections

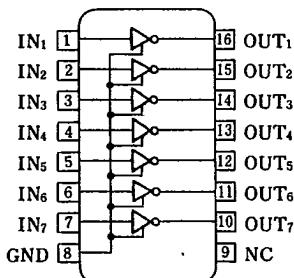

Top View

Equivalent Circuit

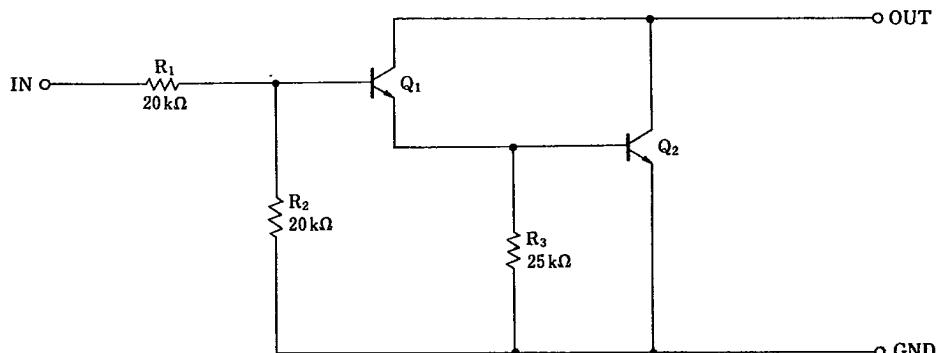

SHARP

7-Unit 400mA Darlington Transistor Array

T-43-25

IR2403

Absolute Maximum Ratings

Parameter	Symbol	Condition	Rating	Unit
Supply voltage	V _{CC}		45	V
Output current* ¹	I _{OUT}	Each circuit	400	mA
Input voltage	V _{IN}		45	V
Breakdown voltage between collector-base	BV _{CBO}		45	V
Breakdown voltage between collector-emitter	BV _{CEO}		45	V
Power dissipation	P _D	T _a ≤25°C	650	mW
P _D derating ratio	ΔP _D /°C	T _a >25°C	6.5	mW/°C
Operating temperature	T _{opr}		-25~+75	°C
Storage temperature	T _{strg}		-55~+125	°C

*1 Duty cycle 8% or less, repetitive frequency 10Hz or more.

**Recommended Operating Conditions**

Parameter	Symbol	Condition	Rating	Unit
Max. output voltage	V _{OM}		45 or less	V
Operating temperature	T _{opr}		-20~+75	°C
Output current	I _{OUT}	at 8% duty	0~400	mA
		at 50% duty	0~150	

* Repetitive frequency 10Hz or more.


Electrical Characteristics

(Ta = -25~+75°C)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply voltage	V _{CC}				45	V
ON-state input current	I _{ON}	V _{IN} =17V, I _{OUT} =0mA		0.8	1.5	mA
ON-state output voltage	V _{O ON1}	V _{IN} =13V, I _{OUT} =400mA			2.2	V
	V _{O ON2}	V _{IN} =13V, I _{OUT} =200mA			1.4	
	V _{O ON3}	V _{IN} =13V, I _{OUT} =100mA			1.2	
OFF-state output current	I _{O OFF}	V _{IN} =0V, V _{OUT} =45V			100	μA
DC current amplitude	h _{FE}	V _{CE} =2.5V, I _C =300mA	1,000			

Electrical Characteristic Curve

Output current—Duty cycle Characteristics

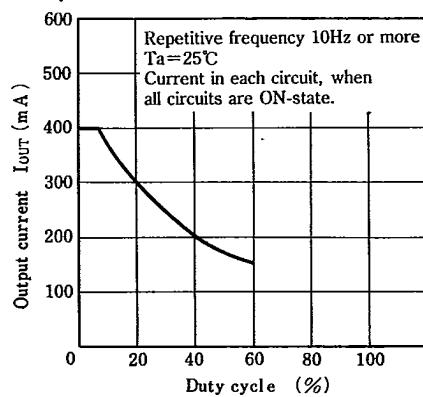

SHARP