

# ADAPTERS, BETWEEN SERIES

## TYPE N / BNC

DC - 8 GHz



MODELS: 5021, 5022, 5023, 5024

### SPECIFICATIONS:


#### Electrical:

Frequency Range \_\_\_\_\_ DC - 8 GHz  
VSWR \_\_\_\_\_ 1.30:1 Max.  
Impedance \_\_\_\_\_ 50 Ohms  
Operating Temp. Range \_\_\_\_\_ -65°C to +125°C


#### Mechanical:

Type N Connectors \_\_\_\_\_ Passivated Stainless Steel  
Mates with MIL-STD-348  
BNC Connectors \_\_\_\_\_ Nickel Plated Brass  
Mates with MIL-STD-348  
Conductors \_\_\_\_\_ Gold Plated Beryllium Copper


Model Number: **5021**  
Type N Male / BNC Male

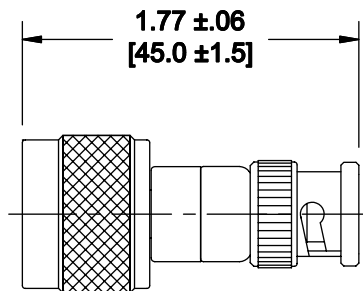


Model Number: **5022**  
Type N Male / BNC Female

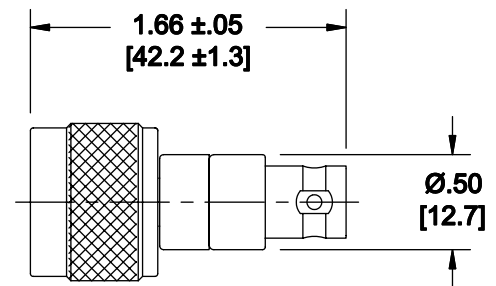

Model Number: **5023**  
Type N Female / BNC Male

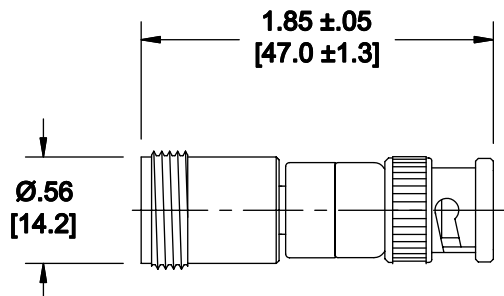

Model Number: **5024**  
Type N Female / BNC Female

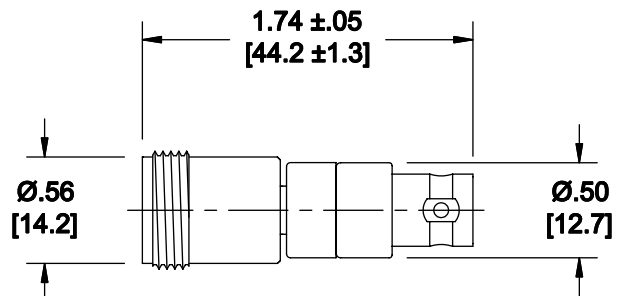

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.  
Units that offer very low return loss (VSWR) are also available.

5021; REV A