

ADAPTERS, BETWEEN-SERIES

TYPE F TO TYPE N (75Ω)

DC - 3 GHz



MODELS: 5195, 5196, 5197 & 5198

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 3.0 GHz

VSWR:

DC to 2.0 GHz _____ 1.15:1 Max.

2.0 to 3.0 GHz _____ 1.30:1 Max.

Impedance _____ 75 Ohms

Operating Temp Range _____ -65°C to +125°C

Mechanical:

Materials:

Connector Bodies:

Type N _____ Passivated Stainless Steel

F-Series _____ Nickel Plated Brass

Center Conductors:


Type N _____ Gold Plated Beryllium Copper

F-Series _____ Nickel Plated Brass and Beryllium Copper

Coupling Nuts _____ Nickel Plated Brass


Model Number: **5195**

F Male / 75 Ohm Type N Male

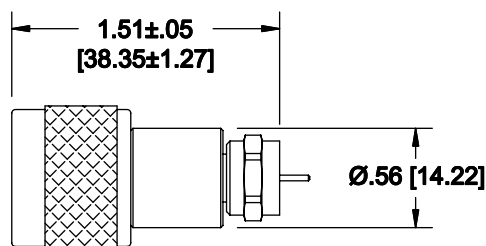


Model Number: **5196**

F Male / 75 Ohm Type N Female

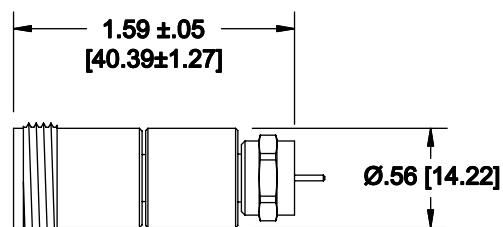


Model Number: **5197**

F Female / 75 Ohm Type N Male

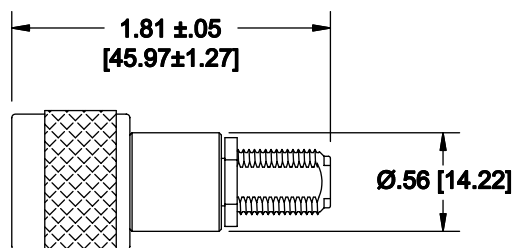

Model Number: **5198**

F Female / 75 Ohm Type N Female

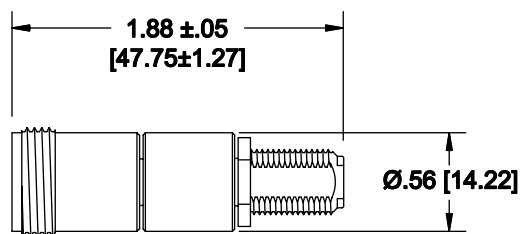

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Selected units featuring very low return loss (VSWR) are also available.

5195; REV -