

ADAPTERS, BETWEEN SERIES

TNC / BNC

DC - 8 GHz



MODELS: 5034, 5035, 5036, 5037

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 8 GHz
VSWR _____ 1.30:1 Max.
Impedance _____ 50 Ohms
Operating Temp. Range _____ -65°C to +125°C

Mechanical:

TNC Connectors*

Mates with MIL-STD-348

Bodies _____ Passivated Stainless Steel

Coupling Nuts _____ Nickel Plated Brass


BNC Connectors _____ Nickel Plated Brass

Mates with MIL-STD-348


Conductors _____ Gold Plated Beryllium Copper

*TNC Connectors are Mode-Free up to 18GHz


Model Number: **5034**
TNC Male / BNC Male

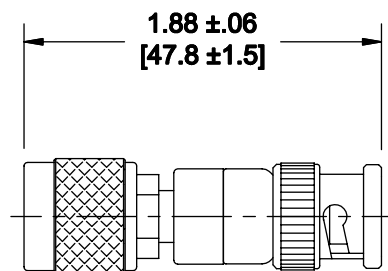


Model Number: **5036**
TNC Male / BNC Female

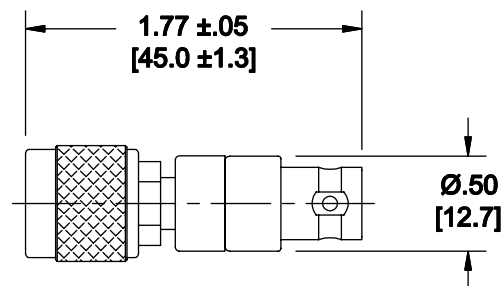

Model Number: **5035**
TNC Female / BNC Male

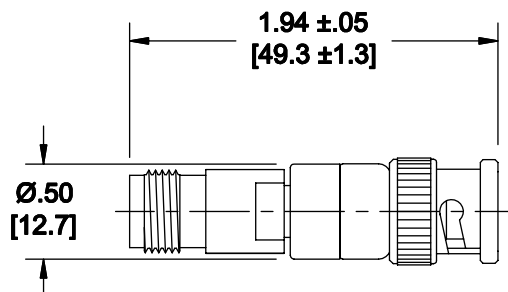

Model Number: **5037**
TNC Female / BNC Female

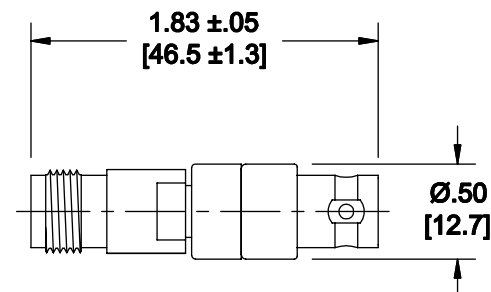

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Units that offer very low return loss (VSWR) are also available.

5034; REV C