

ADAPTERS, BETWEEN SERIES

7mm / BNC

DC - 8 GHz

PRECISION



MODELS: 5116, 5117

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 8 GHz

VSWR

DC - 4 GHz _____ 1.10:1 Max.

4 - 8 GHz _____ 1.15:1 Max.

Impedance _____ 50 Ohms

Operating Temp. Range _____ -65°C to +125°C

Mechanical:

BNC Connectors _____ Nickel Plated Brass


Mates with MIL-STD-348

7mm Connectors _____ Electropolished Stainless Steel


IAW IEEE STD 287

Conductors _____ Gold Plated Beryllium Copper

Model Number: 5116
7mm / BNC Male

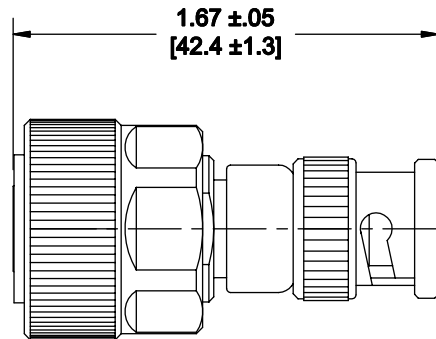

Model Number: 5117
7mm / BNC Female

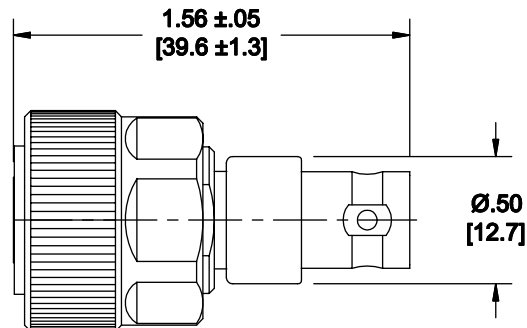

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Units that offer very low return loss (VSWR) are also available.

5116; REV B