

ADAPTERS, BETWEEN SERIES

7mm / TYPE N

DC - 18 GHz

PRECISION



MODELS: 5112, 5113

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 18 GHz

VSWR

DC - 4 GHz _____ 1.04:1 Max.

4 - 8 GHz _____ 1.07:1 Max.

8 - 18 GHz _____ 1.12:1 Max.

Impedance _____ 50 Ohms

Operating Temp. Range _____ -65°C to +125°C

Mechanical:

Type N Connectors _____ Passivated Stainless Steel


Mates with MIL-STD-348

7mm Connectors _____ Electropolished Stainless Steel


IAW IEEE STD 287

Conductors _____ Gold Plated Beryllium Copper

Model Number: **5112**
7mm / Type N Male

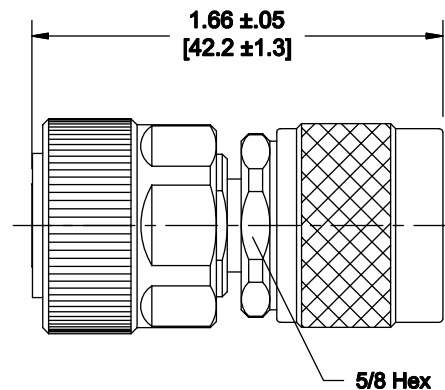

Model Number: **5113**
7mm / Type N Female

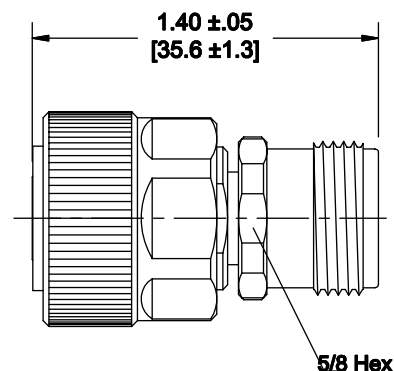

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Units that offer very low return loss (VSWR) are also available.

5112; REV B