

## Features

- Current-controlled Output Current Source, 3 Input Channels
- Two Selectable Outputs for Grounded Laser Diodes
- Output Current per Channel up to 250 mA
- Total Output Current to 300 mA (Minimum)
- Rise Time 1.0 ns, Fall Time 1.1 ns
- On-chip RF Oscillator
- Control of 2 Different Swings by Use of 2 external Resistors
- Oscillator Frequency Range from 200 MHz to 600 MHz
- Oscillator Swing to 100 mA
- Single 5 V Power Supply
- Common Enable/Disable Input
- TTL/CMOS Control Signals
- Small SSO16 Package

## Applications

- DVD-ROM with CD-RW Capability (Combo Drives)
- Combo Drives with CD and DVD Writing Capability

## Description

The T0806 is a laser diode driver for the operation of two different grounded laser diodes for DVD-RAM (650 nm) and CD-RW (780 nm) drives. It includes three channels for three different optical power levels which are controlled by a separate IC. The read channel generates a continuous output level whereas channels 2 and 3 are provided as write channels with very fast switching speeds. Write current pulses are enabled when a low signal is applied to the NE pins. All channels are summed together and switched to one of the two outputs IOUTA or IOUTB by the select input SELA. Each channel can contribute up to 250 mA to the total output current of up to 300 mA. A total gain of 100 is provided between each reference current input and the selected output. Although the reference inputs are current inputs, voltage control is possible by using external resistors.


An on-chip RF oscillator is provided to reduce laser mode hopping noise during read mode. Swing can be set independently for the two selectable outputs with two different resistors. Oscillation is enabled by a high signal at the ENOSC pin. Complete output current and oscillator switch-off is achieved by a 'low' signal at the ENABLE input.



## 3-Channel Laser Driver with RF Oscillator and 2 Outputs


### T0806

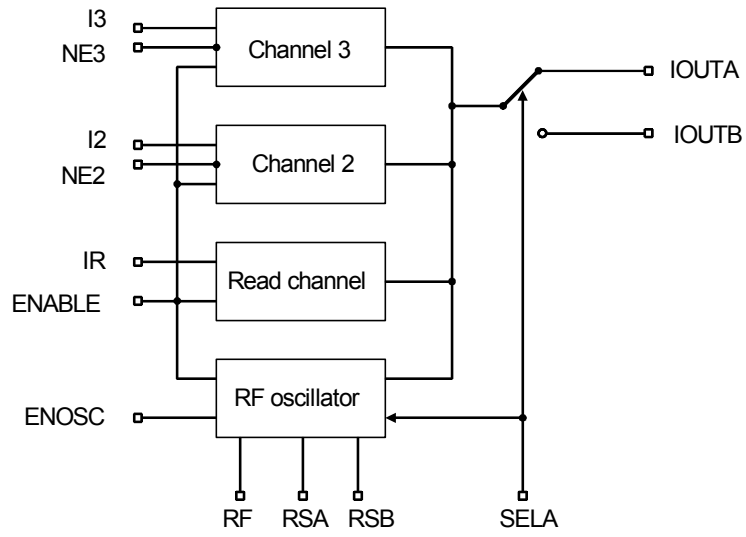**Figure 1.** Block Diagram



## Pin Configuration

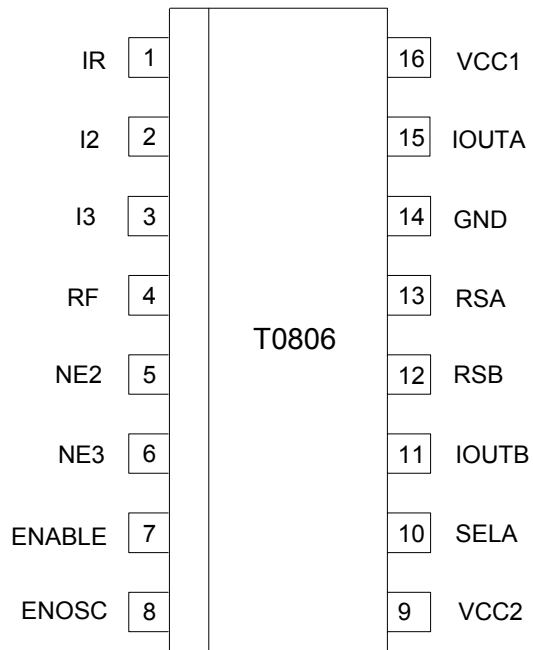**Figure 2.** Pinning SSO16



## Pin Description

Pin	Symbol	Type	Function
1	IR	analog	Input current, bias voltage approximately GND
2	I2	analog	Input current, bias voltage approximately GND
3	I3	analog	Input current, bias voltage approximately GND
4	RF	analog	External resistor to GND sets oscillator frequency of oscillator A
5	NE2	digital	Digital control of channel 2 (low active)
6	NE3	digital	Digital control of channel 3 (low active)
7	ENABLE	digital	Enables output current (high active)
8	ENOSC	digital	Enables RF oscillator (high active)
9	VCC2	supply	+ 5 V power supply for IOUT
10	SELA	digital	High: selects IOUTA, RSA Low: selects IOUTB, RSB
11	IOUTB	analog	Output current source B for laser diode
12	RSB	analog	External resistor to GND sets swing of oscillator B
13	RSA	analog	External resistor to GND sets swing of oscillator A
14	GND	supply	Ground
15	IOUTA	analog	Output current source A for laser diode
16	VCC1	supply	+ 5 V power supply for IOUT and circuit

## Absolute Maximum Ratings

Parameters	Symbol	Value	Unit
Supply voltage	$V_{CC}$	-0.5 to +6.0	V
Input voltage at IR, I2, I3	$V_{IN1}$	-0.5 to +1.0	V
Input voltage at NE2, NE3, ENOSC	$V_{IN2}$	-0.5 to $V_{CC} + 0.5$	V
Output voltage	$V_{OUT}$	-0.5 to $V_{CC} - 1$	V
Total output current	$I_{OUT}$	350	mA
Output current per channel	$I_{OUT (IR, I2, I3)}$	300	mA
Power dissipation	$P_{MAX}$	0.7 <sup>(1)</sup> to 1 <sup>(2)</sup>	W
Junction temperature	$T_J$	150	°C
Storage temperature range	$T_{Stg}$	-65 to +125	°C

Notes: 1.  $R_{thJA} \leq 115 \text{ K/W}$ ,  $T_{amb} = 70^\circ\text{C}$

2.  $R_{thJA} \leq 115 \text{ K/W}$ ,  $T_{amb} = 25^\circ\text{C}$

## Thermal Resistance

Parameters	Symbol	Value	Unit
Junction ambient	$R_{thJA}$	135	K/W

## Recommended Operating Conditions

Parameters	Symbol	Value	Unit
Supply voltage range	$V_{CC}$	4.5 to 5.5	V
Input current	$I_{IR}/I_{I2}/I_{I3}$	< 3.0	mA
External resistor to GND to set oscillator frequency	RF	> 3	k $\Omega$
External resistor to GND to set oscillator swing	RSA, RSB	> 1	k $\Omega$
Operating temperature range	$T_{amb}$	0 to +70	°C

## Electrical Characteristics: General

$V_{CC} = 5\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , ENABLE = High, NE2 = NE3 = High, ENOSC = Low, unless otherwise specified.

No.	Parameters	Test Conditions	Pin	Symbol	Min.	Typ.	Max.	Unit	Type*
<b>1</b>	<b>Power Supply</b>								
1.1	Supply current, power down	ENABLE = Low, NE2 = NE3 = Low	9, 16	$ICC_{PD2}$		0.3		mA	A
1.2	Supply current, read mode, oscillator disabled	$I_{IR} = I_{I2} = I_{I3} = 500\text{ }\mu\text{A}$	9, 16	$ICC_{R1}$		90		mA	A
1.3	Supply current, read mode, oscillator enabled, output A, selected	$I_{IR} = I_{I2} = I_{I3} = 500\text{ }\mu\text{A}$ , ENOSC = High, RS = 8.2 k $\Omega$ , RF = 6.8 k $\Omega$ , SELA = High	9, 16	$ICC_{R2}$		93		mA	A
1.4	Supply current, write mode	$I_{IR} = I_{I2} = I_{I3} = 500\text{ }\mu\text{A}$ , NE2 = NE3 = Low	9, 16	$ICC_W$		180		mA	A
1.5	Supply current, input off	$I_{IR} = I_{I2} = I_{I3} = 0\text{ }\mu\text{A}$	9, 16	$ICC_{off}$		17		mA	A
<b>2</b>	<b>Digital Inputs</b>								
2.1	NE2/NE3 low voltage		5, 6	$VNE_{LO}$			1.3	V	A
2.2	NE2/NE3 high voltage		5, 6	$VNE_{HI}$	2.0			V	A
2.3	SELA low voltage		10	$VSELA_{LO}$			0.5	V	A
2.4	SELA high voltage		10	$VSELA_{HI}$	3.0			V	A
2.5	ENABLE low voltage		7	$VEN_{LO}$			0.5	V	A
2.6	ENABLE high voltage		7	$VEN_{HI}$	2.7			V	A
2.7	ENOSC low voltage		8	$VEO_{LO}$			0.5	V	A
2.8	ENOSC high voltage		8	$VEO_{HI}$	3.0			V	A
<b>3</b>	<b>Current at Digital Inputs</b>								
3.1	NE2/NE3 low current	NE = 0 V	5, 6	$INE_{LO}$	-300			$\mu\text{A}$	A
3.2	NE2/NE3 high current	NE = 5 V	5, 6	$INE_{HI}$			800	$\mu\text{A}$	A
3.3	SELA low current	SELA = 0 V	10	$ISELA_{LO}$	-50			$\mu\text{A}$	A
3.4	SELA high current	SELA = 5 V	10	$ISELA_{HI}$			150	$\mu\text{A}$	A
3.5	ENABLE low current	ENABLE = 0 V	7	$IEN_{LO}$	-150			$\mu\text{A}$	A

\* ) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter

## Electrical Characteristics: General (Continued)

$V_{CC} = 5\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , ENABLE = High, NE2 = NE3 = High, ENOSC = Low, unless otherwise specified.

No.	Parameters	Test Conditions	Pin	Symbol	Min.	Typ.	Max.	Unit	Type*
3.6	ENABLE high current	ENABLE = 5 V	7	$I_{EN_{HI}}$			100	$\mu\text{A}$	A
3.7	ENOSC low current	ENOSC = 0 V	8	$I_{EO_{LO}}$	-100			$\mu\text{A}$	A
3.8	ENOSC high current	ENOSC = 5 V	8	$I_{EO_{HI}}$			800	$\mu\text{A}$	A

\*) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter

## Electrical Characteristics: Laser Amplifier

$V_{CC} = 5\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , ENABLE = High, unless otherwise specified.

No.	Parameters	Test Conditions	Pin	Symbol	Min.	Typ.	Max.	Unit	Type*
<b>4</b>	<b>Outputs IOUTA and IOUTB</b>								
4.1	Total output current	Output is sourcing	11, 15	$I_{OUT}$	300	350		mA	A
4.2	Output current per channel	Output is sourcing	11, 15	$I_{OUTR}$	250			mA	A
4.3	Best fit current gain	Any channel <sup>(1)</sup>	11, 15	GAIN	90	100	130	mA/mA	A
4.4	Best fit current offset	Any channel <sup>(1)</sup>	11, 15	IOS	-8		+4	mA	A
4.5	Output current linearity	Any channel <sup>(1)</sup>	11, 15	ILIN	-3		+3	%	A
4.6	$I_{IN}$ input impedance	$R_{IN}$ is to GND	1, 2, 3	$R_{IN}$	150	200	250	$\Omega$	A
4.7	NE threshold	Temperature stabilized	5, 6	VTH		1.68		V	C
4.8	Output off current 1	ENABLE = Low	11, 15	$I_{OFF1}$			1	mA	A
4.9	Output off current 2	NE2 = NE3 = High, $I_{IR} = 0\text{ }\mu\text{A}$ , $I_{I2} = I_{I3} = 500\text{ }\mu\text{A}$	11, 15	$I_{OFF2}$			1	mA	A
4.10	Output off current 3	NE2 = NE3 = Low, $I_{IR} = I_{I2} = I_{I3} = 0\text{ }\mu\text{A}$	11, 15	$I_{OFF3}$			5	mA	A
4.11	$I_{OUT}$ supply sensitivity, read mode	$I_{OUT} = 40\text{ mA}$ , $V_{CC} = 5\text{ V} \pm 10\%$ , read only	11, 15	$VSE_R$	-5		+1	%/V	A
4.12	$I_{OUT}$ supply sensitivity, write mode	$I_{OUT} = 80\text{ mA}$ , 40 mA read + 40 mA write, $V_{CC} = 5\text{ V} \pm 10\%$	11, 15	$VSE_W$	-6		0	%/V	A
4.13	$I_{OUT}$ current output noise	$I_{OUT} = 40\text{ mA}$ , ENOSC = Low	11, 15	$INO_O$		3		nA/rt-Hz	C
4.14	$I_{OUT}$ temperature sensitivity, read mode	$I_{OUT} = 40\text{ mA}$ , read only	11, 15	$TSE_R$		500		ppm/ $^{\circ}\text{C}$	C
4.15	$I_{OUT}$ temperature sensitivity, write mode	$I_{OUT} = 80\text{ mA}$ , 40 mA read + 40 mA write	11, 15	$TSE_W$		500		ppm/ $^{\circ}\text{C}$	C

\*) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter

Note: 1. Linearity of the amplifier is calculated using a best fit method at three operating points of  $I_{OUT}$  at 20 mA, 40 mA, and 60 mA.  $I_{OUT} = (I_{IN} \times \text{GAIN}) + I_{OS}$

## Electrical Characteristics: Laser Amplifier AC Performance

$V_{CC} = +5\text{ V}$ ,  $I_{OUT} = 40\text{ mA}$  DC with 40 mA pulse,  $T_A = 25^\circ\text{C}$  unless otherwise specified.


No.	Parameters	Test Conditions	Pin	Symbol	Min.	Typ.	Max.	Unit	Type
<b>5</b>	<b>Outputs IOUTA and IOUTB, AC Performance</b>								
5.1	Write rise time	$I_{OUT} = 40\text{ mA (read)} + 40\text{ mA (10\% to 90\%)}^{(1)}$	11, 15	$t_{RISE}$		1.0	2.0	ns	C
5.2	Write fall time	$I_{OUT} = 40\text{ mA (read)} + 40\text{ mA (10\% to 90\%)}^{(1)}$	11, 15	$t_{FALL}$		1.1	2.0	ns	C
5.3	Output current overshoot	$I_{OUT} = 40\text{ mA (read)} + 40\text{ mA}^{(1)}$	11, 15	OS		5		%	C
5.4	$I_{OUT}$ ON propagation delay	NE 50% High-Low to $I_{OUT}$ at 50% of final value	11, 15	$t_{ON}$		2		ns	C
5.5	$I_{OFF}$ OFF propagation delay	NE 50% Low-High to $I_{OUT}$ at 50% of final value	11, 15	$t_{OFF}$		2		ns	C
5.6	Disable time	ENABLE 50% High-Low to $I_{OUT}$ at 50% of final value	11, 15	$t_{DIS}$		20		ns	C
5.7	Enable time	ENABLE 50% Low-High to $I_{OUT}$ at 50% of final value	11, 15	$t_{EN}$		20		ns	C
5.8	SELA delay	SELA 50% Low-High to $I_{OUT}$ at 50% of final value	11, 15	$T_{SAH}$		20			C
5.9	SELA delay	SELA 50% High-Low to $I_{OUT}$ at 50% of final value	11, 15	$T_{SAL}$		20			C
5.10	Amplifier bandwidth	$I_{OUT} = 50\text{ mA}$ , all channels, $-3\text{ dB}$ value	11, 15	$BW_{LCA}$		16		MHz	C
<b>6</b>	<b>Oscillator</b>								
6.1	Oscillator frequency	RF = 7.5 k $\Omega$	11, 15	$F_{OSC}$	255	300	350	MHz	A
6.2	Oscillator temperature coefficient	RF = 7.5 k $\Omega$	11, 15	$TC_{OSC}$		-150		ppm/ $^\circ\text{C}$	C
6.3	Disable time oscillator	ENOSC 50% High-Low to $I_{OUT}$ , at 10%/90% of final value	11, 15	$T_{DISO}$		4		ns	C
6.4	Enable time oscillator	ENOSC 50% Low-High to $I_{OUT}$ , at 10%/90% of final value	11, 15	$T_{ENO}$		2		ns	C

\*) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter


Note: 1. Load resistor at IOUT 6.8  $\Omega$ , measurement with 50- $\Omega$  oscilloscope and 39- $\Omega$  series resistor.

## Characteristics Curves


**Figure 3.** Oscillator Frequency vs. Resistor  $R_F$  ( $R_S = 7.5\text{ k}\Omega$ )

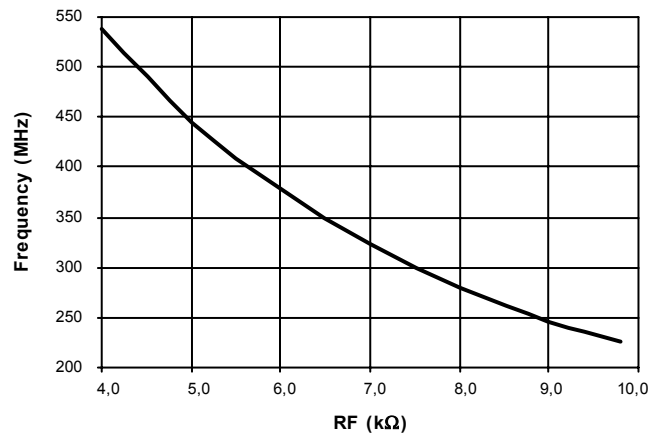


**Figure 4.** Oscillator Swing vs. Resistor  $R_S$  ( $R_F = 7.5\text{ k}\Omega$ )

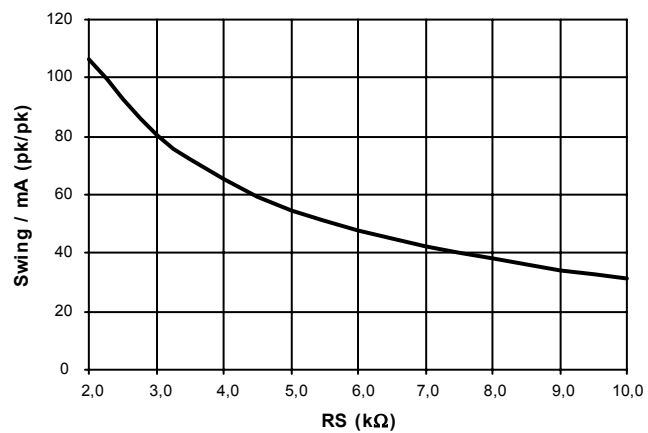


**Figure 5.** Oscillator Frequency Dependency of Swing

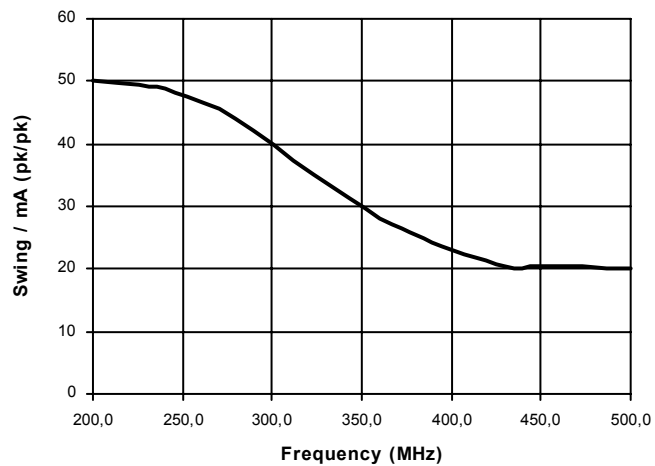

**Figure 6.** Transfer Characteristic of all Channels (Gain = 110.7)

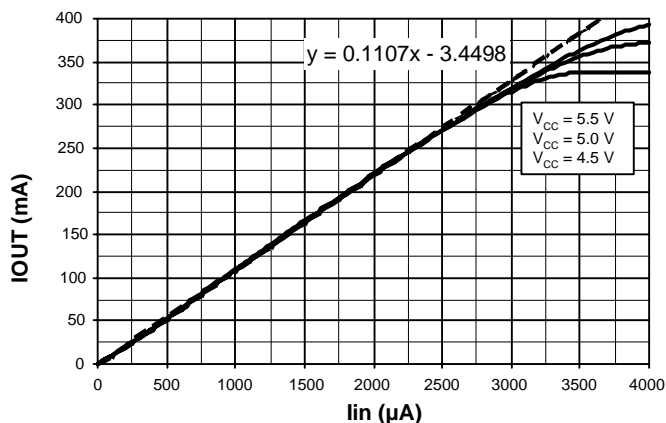

**Figure 7.** Voltage Compliance R ( $I_{OUT}$  to  $V_{CC}$ ) = 5.9  $\Omega$

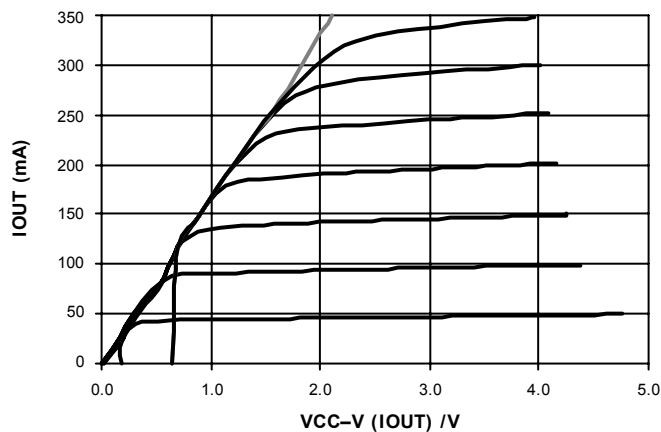

**Figure 8.** Step Response, Read Channel: 50 mA, Channel 2: 50 mApp

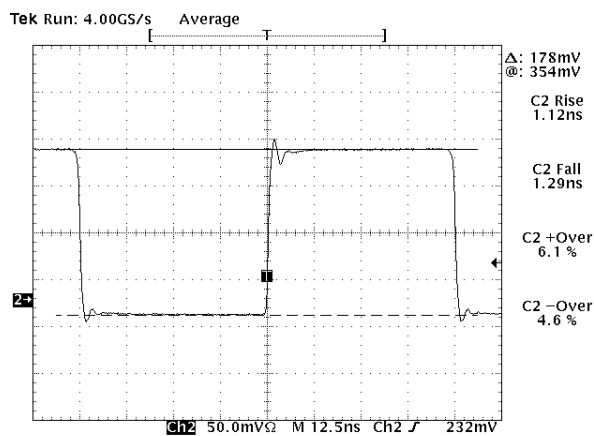
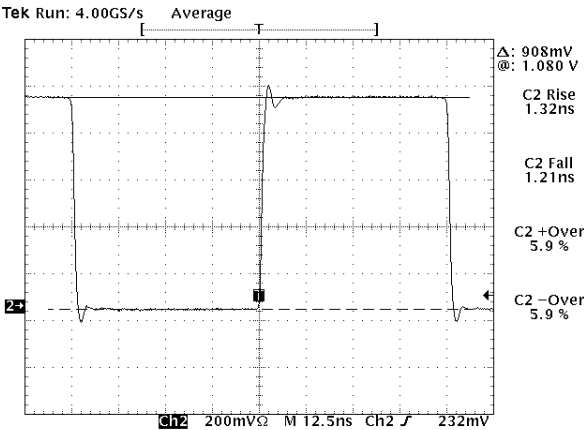


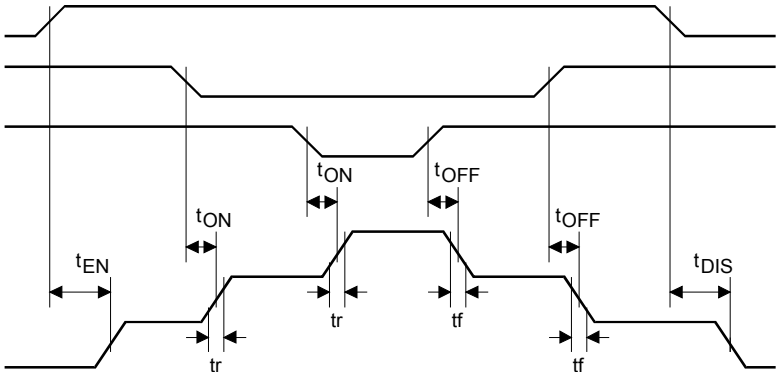


Figure 9. Step Response, Read Channel: 50 mA, Channel 2: 250 mApp




Timing Diagram

Figure 10. Timing Diagram of IOUTA/IOUTB



## Typical Application Circuit

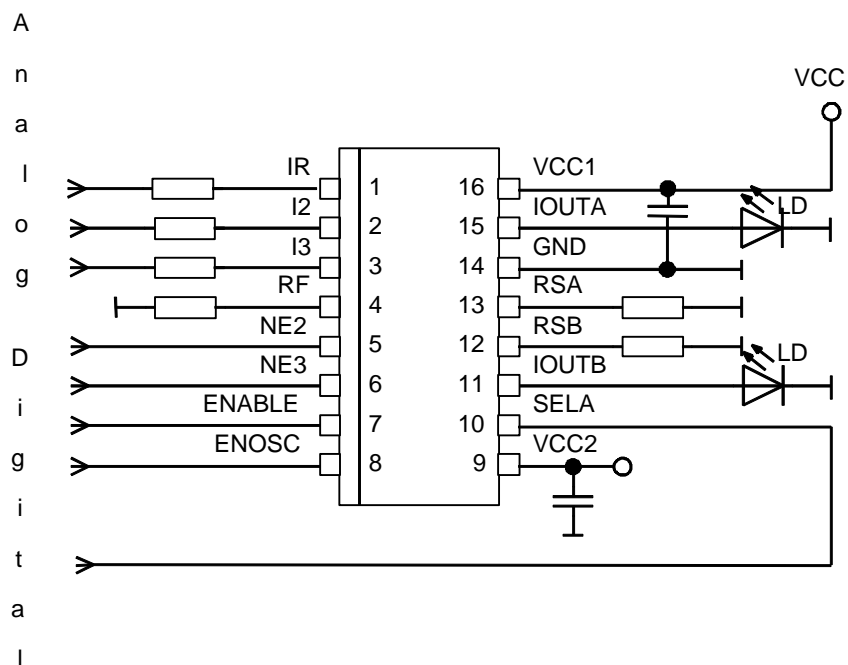
Figure 11. Application Circuit



## Ordering Information

Extended Type Number	Package	Remarks
T0806-TCQ	SS016	Taped and reeled
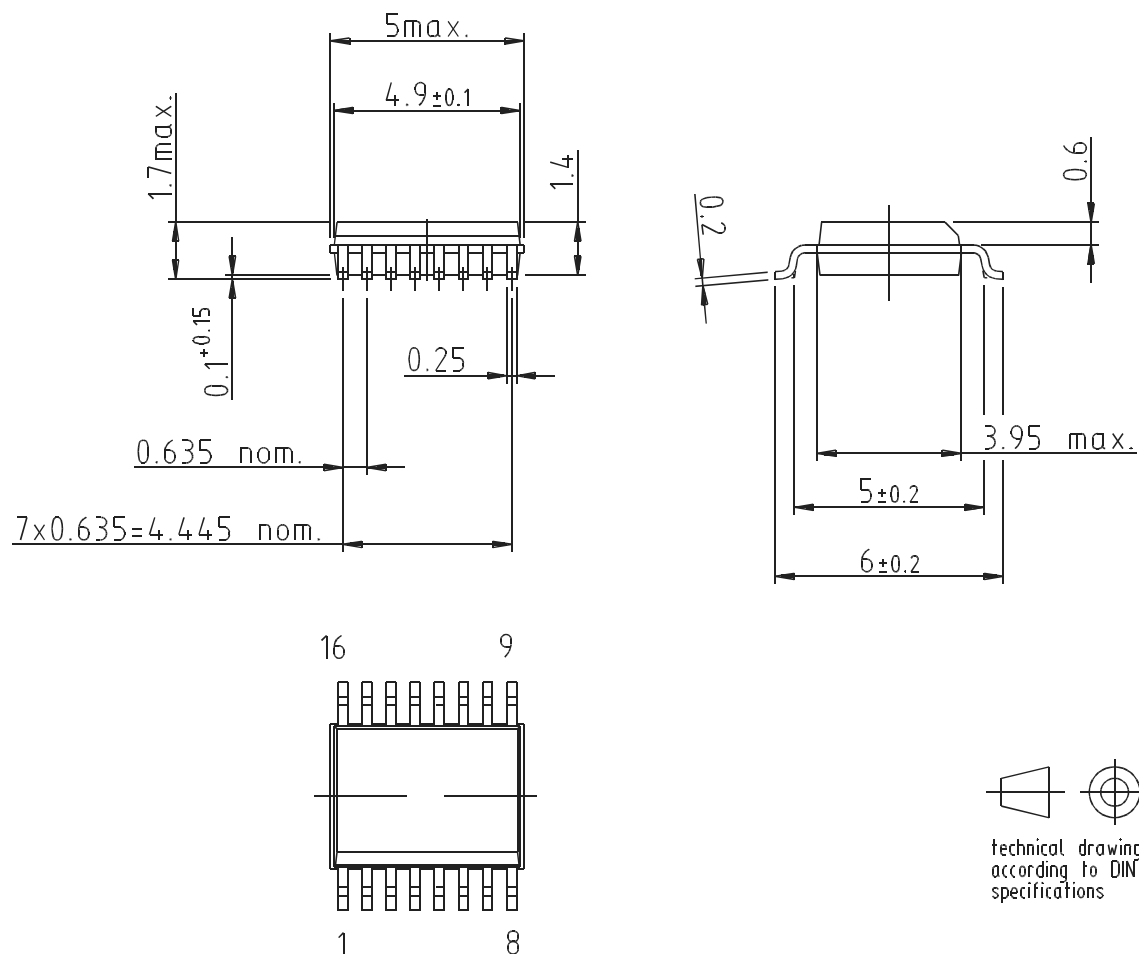
## Package Information



Drawing refers to following types: SS016  
Package acc. JEDEC MO 137 AB

Drawing-No.: 6.543-5060.01-4  
Issue: 2; 05.02.99



## **Atmel Headquarters**

### ***Corporate Headquarters***

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 487-2600

### ***Europe***

Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
TEL (41) 26-426-5555  
FAX (41) 26-426-5500

### ***Asia***

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimhatsui  
East Kowloon  
Hong Kong  
TEL (852) 2721-9778  
FAX (852) 2722-1369

### ***Japan***

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
TEL (81) 3-3523-3551  
FAX (81) 3-3523-7581

## **Atmel Operations**

### ***Memory***

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 436-4314

### ***Microcontrollers***

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
TEL (33) 2-40-18-18-18  
FAX (33) 2-40-18-19-60

### ***ASIC/ASSP/Smart Cards***

Zone Industrielle  
13106 Rousset Cedex, France  
TEL (33) 4-42-53-60-00  
FAX (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL 1(719) 576-3300  
FAX 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
TEL (44) 1355-803-000  
FAX (44) 1355-242-743

### ***RF/Automotive***

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
TEL (49) 71-31-67-0  
FAX (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL 1(719) 576-3300  
FAX 1(719) 540-1759

### ***Biometrics/Imaging/Hi-Rel MPU/***

### ***High Speed Converters/RF Datacom***

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
TEL (33) 4-76-58-30-00  
FAX (33) 4-76-58-34-80

---

### ***e-mail***

literature@atmel.com

### ***Web Site***

<http://www.atmel.com>

## **© Atmel Corporation 2002.**

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

Atmel® is the registered trademark of Atmel.

Other terms and product names may be the trademarks of others.



Printed on recycled paper.