

ADAPTERS, BETWEEN SERIES

7mm / 2.4mm

DC - 18 GHz

PRECISION



MODELS: 5181, 5182

SPECIFICATIONS:


Electrical:

Frequency Range _____ DC - 18 GHz
VSWR _____ 1.10:1 Max.
Impedance _____ 50 Ohms
Operating Temp. Range _____ -65°C to +125°C


Mechanical:

2.4mm Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
7mm Connectors _____ Electropolished Stainless Steel
IAW IEEE STD 287
Conductors _____ Gold Plated Beryllium Copper

Model Number: **5181**
7mm / 2.4mm Male

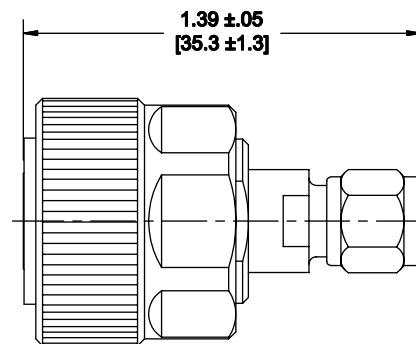

Model Number: **5182**
7mm / 2.4mm Female

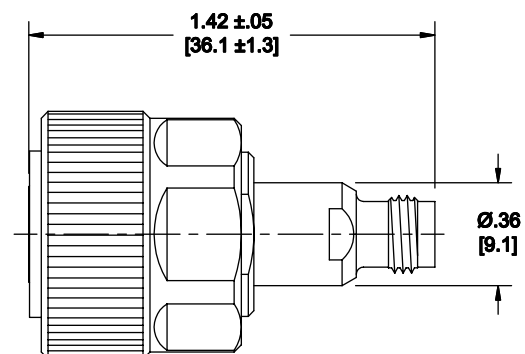

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5181; REV B