

ADAPTERS, BETWEEN SERIES

TYPE N / SMA

DC - 18 GHz
BULKHEAD MOUNT



MODELS: 5203, 5207, 5216 & 5217


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 18.0 GHz
VSWR _____
DC - 4 GHz _____ 1.04:1 Max.
4 - 8 GHz _____ 1.07:1 Max.
8 - 18 GHz _____ 1.12:1 Max.
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +125°C


Mechanical:

Connectors _____ Passivated Stainless Steel
(Mates with MIL-STD-348)
Conductors _____ Gold Plated Beryllium Copper

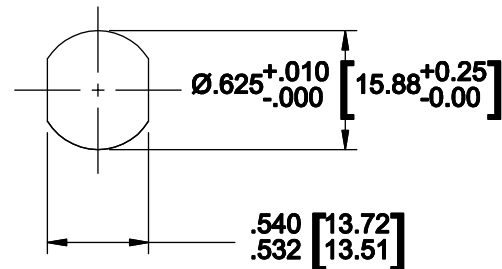


Recommended Panel
Configuration

Model Number: **5207**
Type N Female / SMA Male
No O-Ring Included

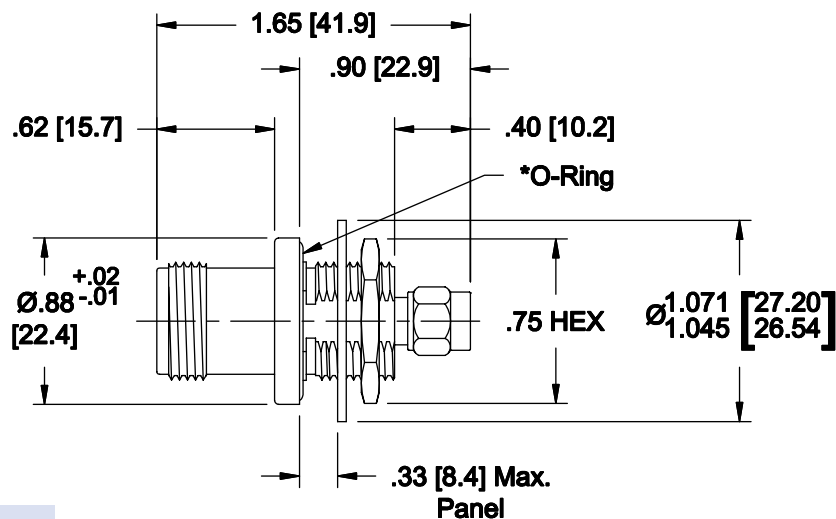

Model Number: **5216**
Type N Female / SMA Male
*Includes O-Ring

Model Number: **5203**
Type N Female / SMA Female
No O-Ring Included

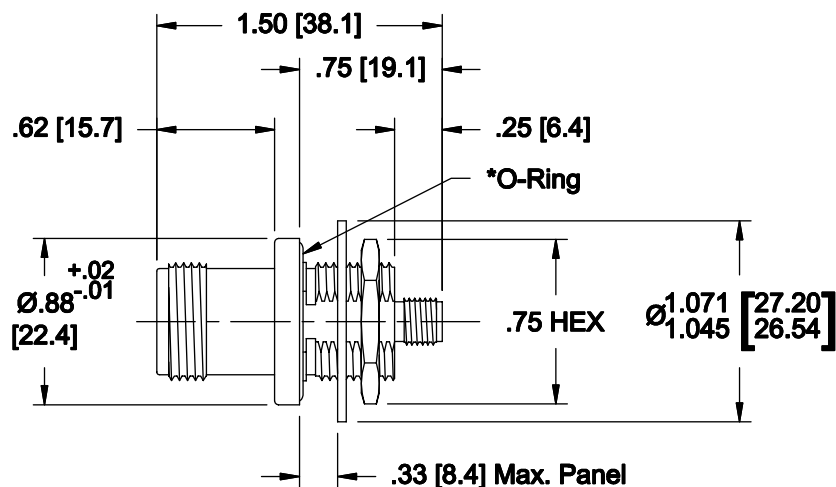

Model Number: **5217**
Type N Female / SMA Female
*Includes O-Ring

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5207; REV F