


5974 Series

Centronic Connector Solder Type

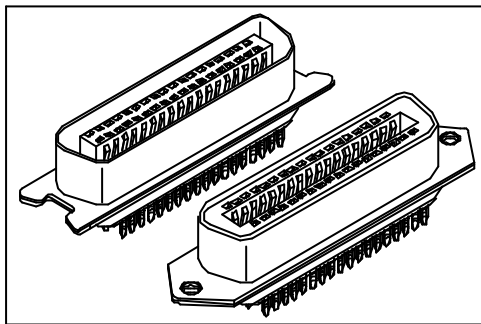

Material:

Housing: PBT, UL94V-0 Rated.

Contacts: Brass.

Plating: Selective gold plated on contact area nickel

Shell: Cold Roller Steel.

Electrical Characteristics:


Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩmin. at DC 500V.

Contact Resistance: 30mΩmax.

Operating Temperature: -55°C ~ +105°C.

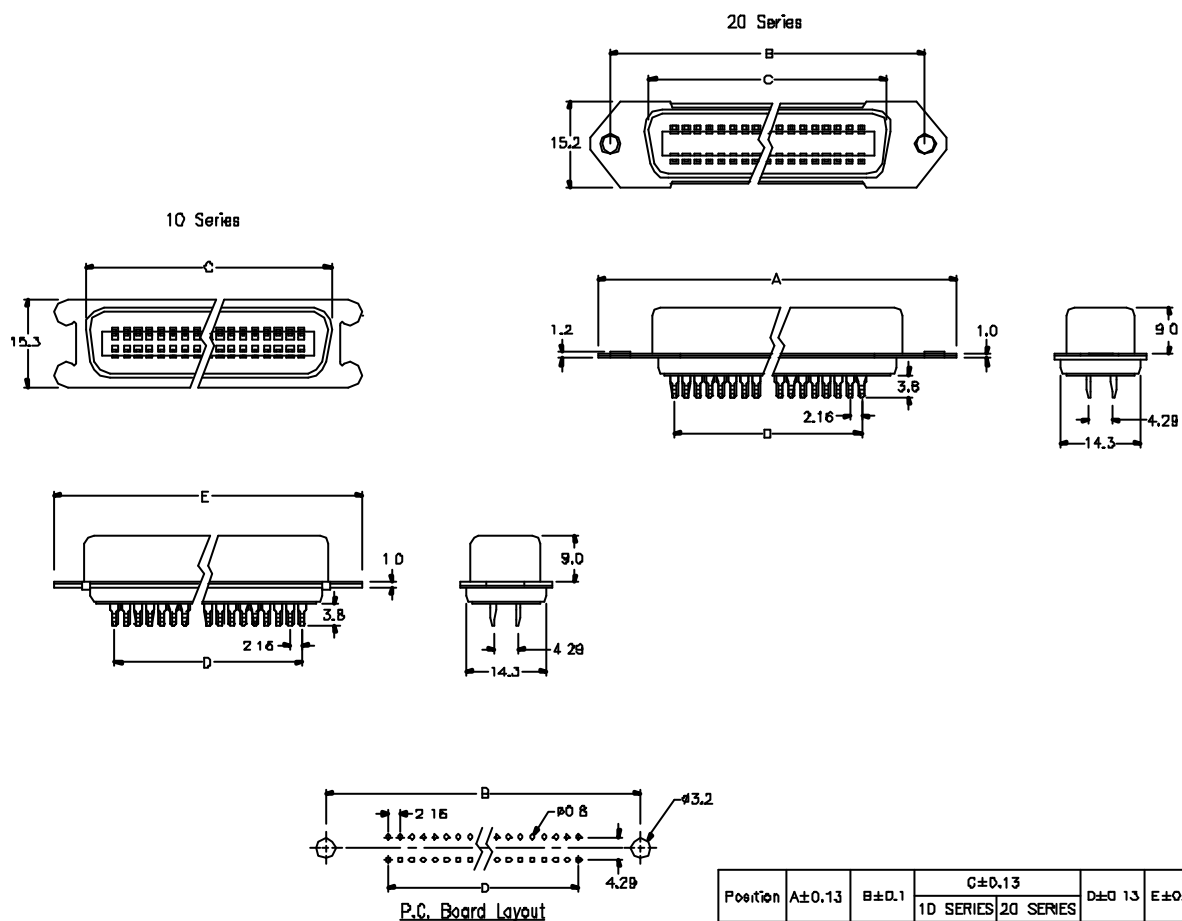

Position	A±0.13	B±0.1	C±0.13		D±0.13	E±0.13
			10 SERIES	20 SERIES		
14	43.7	35.99	25.6	25.2	12.96	38.5
24	54.5	46.79	36.47	36.0	23.76	49.3
36	67.6	59.74	49.35	48.9	36.72	62.0
50	82.8	74.85	64.47	64.0	51.84	77.4

Ordering information

5974-	10	500
Series	10: Male	140: 14 Pin
	20: Female	240: 24 Pin
		360: 36 Pin
		500: 50 Pin