

DN6847/SE/TE/S

Hall IC (Operating Temperature Range
Topr=−40 to +100°C, Operating in
Alternative Magnetic Field)

Overview

The DN6847/SE/TE/S is a combination of a Hall element, amplifier, Schmitt circuit, and stabilized power supply/temperature compensator integrated on an identical chip by using the IC technology. It amplifies Hall element output at the amplifier, converts into a digital signal through the Schmitt circuit, and drives the TTL or MOS IC directly.

Features



- High sensitivity and low drift
- Stable temperature characteristics due to the additional temperature compensator
- Wide operating supply voltage range (VCC=4.5 to 16V)
- Operating in alternative magnetic field
- TTL and MOS ICs directly drivable by output
- Provided with the output pull-up resistors(typ 27kΩ)

Applications

- Speed sensors
- Position sensors
- Rotation sensors
- Keyboard switches
- Microswitches

Note) This IC is not suitable for car electrical equipments.

Block Diagram

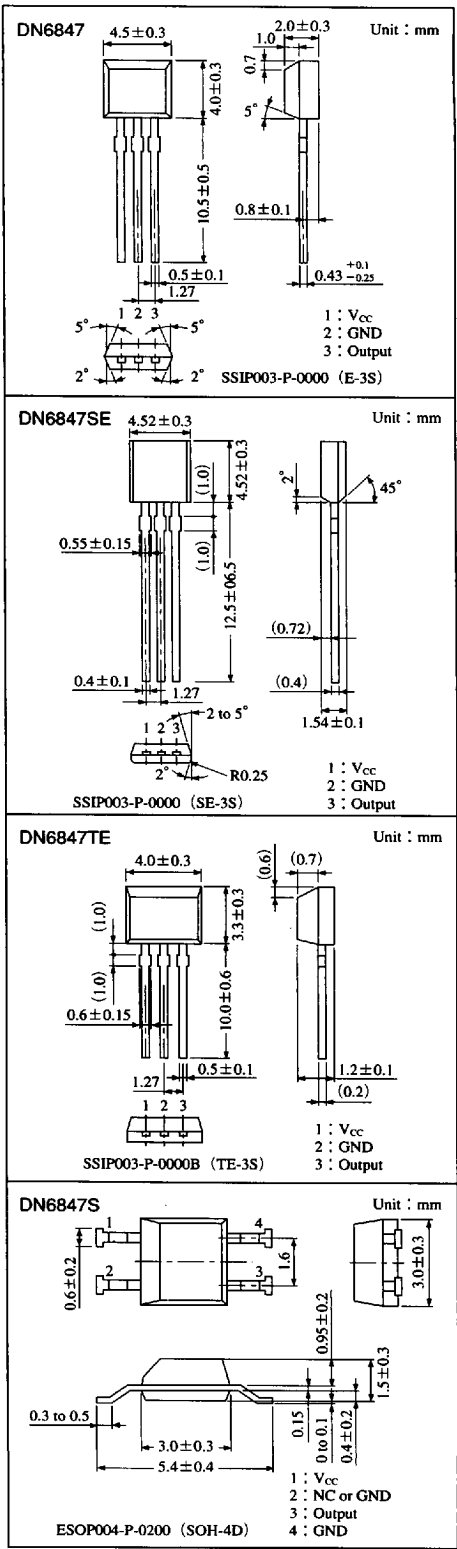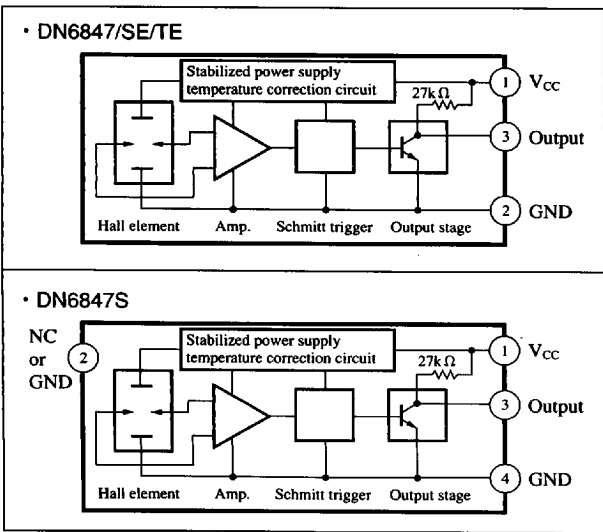

6932852 0013249 171

■ Absolute Maximum Ratings (Ta=25℃)


Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	18	V
Supply current	I _{CC}	8	mA
Circuit current	I _O	20	mA
Power dissipation	P _D	150	mW
Operating ambient temperature	T _{opr}	−40 to +100	℃
Storage temperature	T _{stg}	−55 to +125	℃

■ Electrical Characteristics (Ta=25℃)

Parameter	Symbol	Condition	min	typ	max	Unit
Operating flux density	B ₁ (L to H)	V _{CC} =12V	−17.5	−6	—	mT
	B ₂ (H to L)	V _{CC} =12V	—	6	17.5	mT
Hysteresis width	BW	V _{CC} =12V	7	10	—	mT
Output voltage	V _{OL}	V _{CC} =4.5 to 16V, I _O =12mA, B=17.5mT	—	—	0.4	V
	V _{OH}	V _{CC} =16V, I _O =−30μA, B=−17.5mT	14.7	—	—	V
		V _{CC} =4.5V, I _O =−30μA, B=−17.5mT	2.9	—	—	V
Output short-circuit current	−I _{OS}	V _{CC} =16V, V _O =0V, B=−17.5mT	0.4	—	0.9	mA
Supply current	I _{CC}	V _{CC} =16V	1	—	6	mA
		V _{CC} =4.5V	1	—	5.5	mA


■ Hall Element Position

Unit : mm
The center of the Hall element is in the hatched area in the right figure.

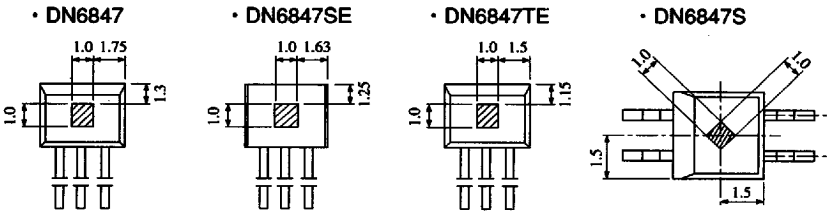

Distance from package surface to sensor	DN6847	DN6847SE	DN6847TE	DN6847S
	0.7	0.42	0.4	0.65

■ Flux-Voltage Conversion Characteristics

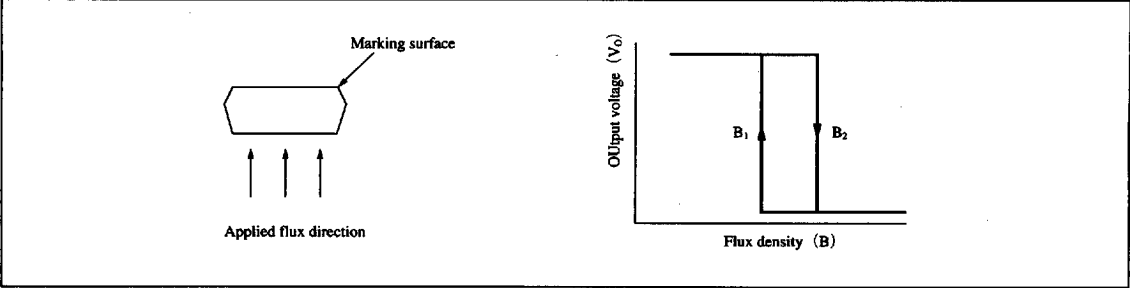


■ 6932852 0013250 993 ■

Panasonic

■ Precaution on Use

- 1. Change of the operation magnetic flux density does not depend on the supply voltage, because the stabilization power supply is built-in. (only for the range; $V_{CC}=4.5$ to $16V$)
- 2. Change from "H" to "L" level increases the supply current by approx. 1mA.

■ Characteristics Curve

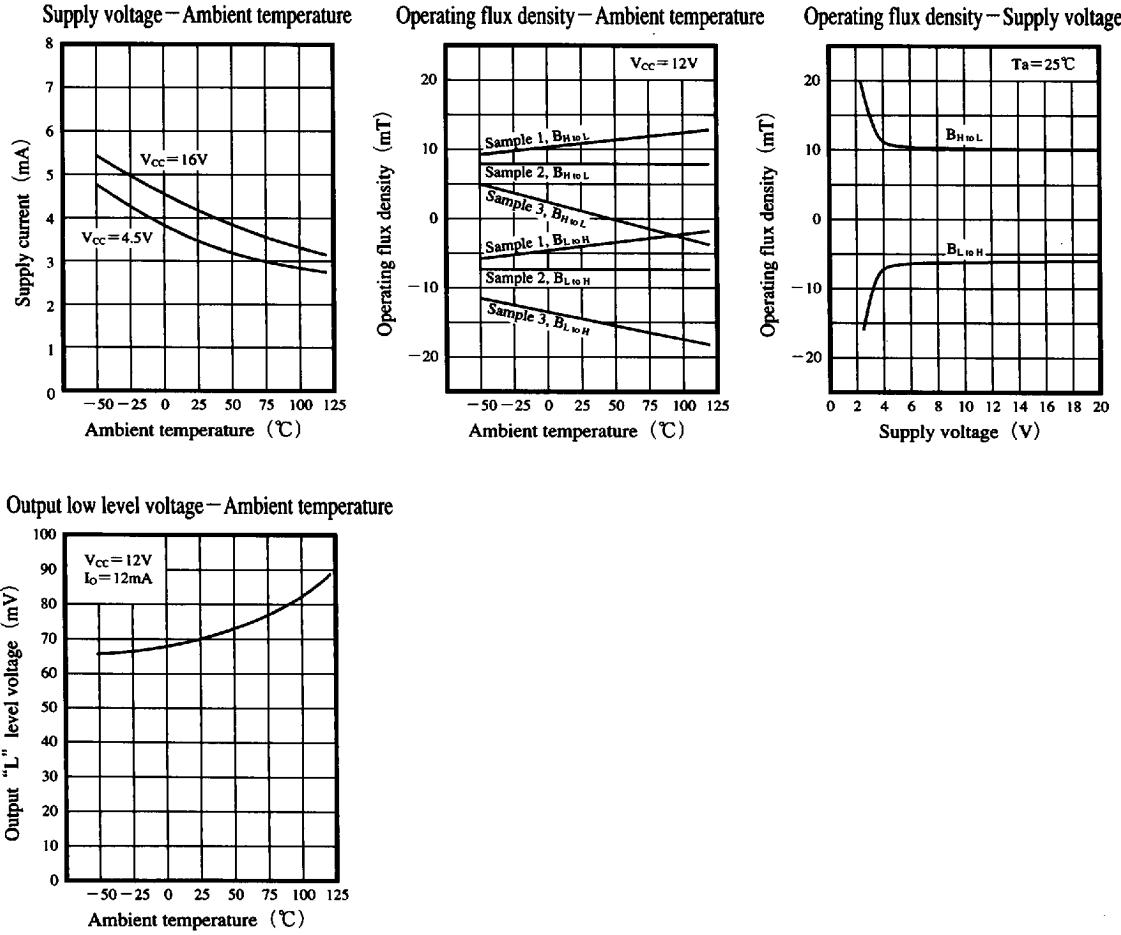

■ 6932852 0013251 82T ■

Panasonic