

## AMD's next generation of wireless LAN solutions

**A cost-effective wireless LAN solution optimized to deliver high performance for low power, small form-factor applications.**

### Overview

The AMD Alchemy™ Solutions Aml772™ wireless LAN chipset is the first offering from AMD's next generation of wireless LAN solutions.

An optimized IEEE 802.11b Wi-Fi™ based wireless LAN solution that combines low-power consumption with a small form factor, the Aml772 wireless chipset is the first building block in a long-term wireless strategy from AMD. By listening to the needs of wireless LAN solution providers, we've created a compact design that enables highly cost-effective, small form factor solutions. The two-chip, direct-down conversion design also allows the Aml772 chipset to be used in conjunction with other wired and wireless technologies to create innovative system solutions.

### Highlights

The Aml772 chipset has been designed to help:

#### Preserve board space

The Aml772 requires a minimal number of additional components. The AMD Alchemy™ Solutions Aml770™ wireless product is a world-class, Zero-IF, 2.4GHz DSSS transceiver that features a highly integrated design. By eliminating the need for external VCOs and an Rx/Tx filter—and requiring a single external 44MHz oscillator—the Aml770 transceiver conserves precious board space and reduces the Bill of Materials.

#### Lower power consumption

The Aml772 chipset is optimized for low-power consumption solutions, combining a CMOS RF transceiver and medium access controller baseband processor.

#### Improve performance

The AMD Alchemy™ Solutions Aml771™ wireless product incorporates a pioneering low-noise digital interface to the Aml770 transceiver, which allows the development of high performance and low component count WLAN solutions. It also features on-chip MAC hardware acceleration to help minimize CPU utilization compared to today's technology.



The descriptor-based DMA architecture also eliminates the need for external SRAM and Flash memory, and is designed to improve system efficiency while providing an easy path for host CPU software enhancements to support future WLAN security and QoS requirements.

### At a Glance

#### Aml770™ Zero-IF Transceiver

- No external VCO, tank circuitry, loop and SAW filter
- Digital interface to Aml771 BB/MAC
- Automatic calibration of filter cut-off frequencies
- Self-contained AGC requires no BB intervention
- Automatic Tx Power Level Control (APLC), including level adjustment
- High receiver sensitivity designed to increase performance and range

#### Aml771™ Integrated Baseband/MAC

- Eliminates external SRAM and Flash memory
- PCI and CardBus host bus interface
- On-chip MAC hardware acceleration resulting in low CPU utilization
- Advanced low-power CMOS process lowers operating current
- Full support of all 802.11b long and short header modes
- State-of-the-art channel equalizer provides robust and stable performance in a variety of environments

# AMD Alchemy™ Solutions Aml772 Wireless LAN Chipset

## Package

Aml770


Zero-IF Transceiver (7x7)mm

48-pin LQFP

Aml771

BB/MAC Controller (13x13)mm

176-ball LFBGA

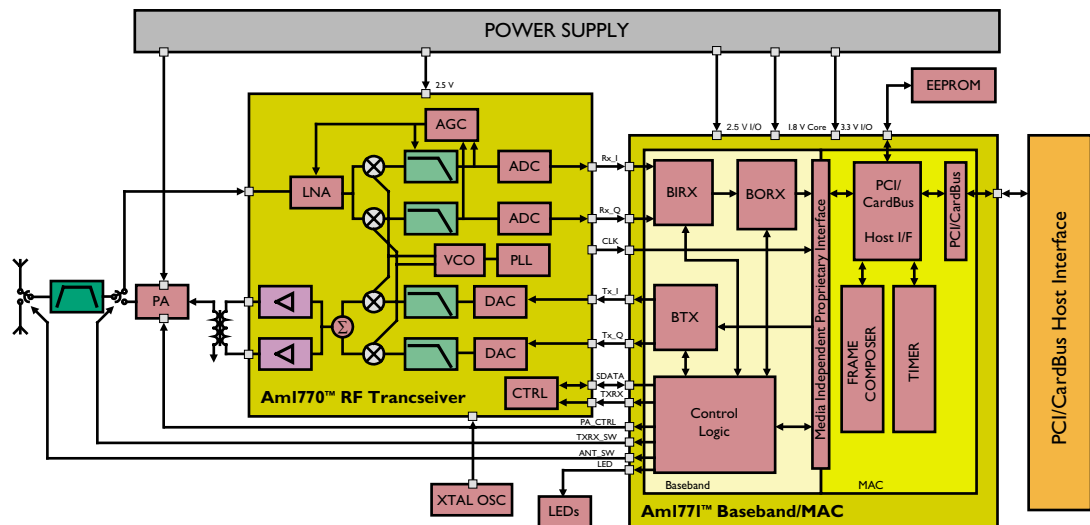

## Specifications

IEEE standard support	802.11b compliant
Variable data rates	11, 5.5, 2, and 1 Mbps (short and long header modes)
Frequency band	ISM-band (2400MHz—2484MHz)
Receive sensitivity (8% PER)	-87dBm (@11Mbps) -90dBm (@5.5Mbps) -92dBm (@2.0Mbps) -95dBm (@1.0Mbps)
Security WEP	WEP 40- and 128-bit, TKIP + WPA*
Operating temperature	-40°C to +85°C for Aml771 -20°C to +80°C for Aml770
Power supply	Aml770: 2.5V Aml771: 1.8V, 2.5V, 3.3V

\*Software enhancements planned for TKIP + WPA in the future

## Power consumption in (mW)

	Aml770	Aml771
	Transceiver	MAC/BB
Tx mode	≤ 175mW	≤ 40mW
Rx mode	≤ 210mW	≤ 85mW
Listen mode	N/A	≤ 45mW
Sleep mode	≤ 7.5mW	≤ 30mW

## System documentation

- User guide
- Data sheets
- Application notes
- Complementary drivers and utilities

## Operating system support

- Windows® 98
- Windows ME
- Windows 2000
- Windows XP
- Windows NT®
- Linux

## Reference design kits (RDKs)

- Mini PCI type IIIb
- PC card (CardBus)

## About AMD

AMD is a global supplier of integrated circuits for the personal and networked computer and communications markets with manufacturing facilities in the United States, Europe, Japan, and Asia.

AMD, a Fortune 500 and Standard & Poor's 500 company, produces micro-processors, flash memory devices, and support circuitry for communications and networking applications.

Founded in 1969 and based in Sunnyvale, California, AMD had revenues of \$3.9 billion in 2001. (NYSE: AMD)

**AMD**  
www.amd.com

One AMD Place  
P.O. Box 3453,  
Sunnyvale, CA 94088-3453, USA  
Tel: 408-732-2400 or 800-538-8450  
TWX: 910-339-9280  
TELEX: 34-6306

## Technical Support

USA & Canada: 800-222-9323 or 408-749-5703  
USA & Canada PC Microprocessor:  
408-749-3060  
USA & Canada Email: hw.support@amd.com

Latin America Email:  
latinamerica.support@amd.com

Europe & UK: +44-0-1276-803299  
Fax: +44-0-1276-803298  
France: 0800-908-621  
Germany: 089-450-53199  
Italy: 800-877224  
Europe Email: euro.tech@amd.com  
Far East Fax: 852-2956-0588  
Japan Fax: 81-3-3346-7848

## Literature Ordering

On the Web: www.amd.com/support/literature.html  
USA & Canada: 800-222-9323  
Europe Email: euro.lit@amd.com  
Far East Fax: 852-2956-0588  
Japan Fax: 03-3346-9628

© 2002 Advanced Micro Devices, Inc. All rights reserved. AMD, the AMD Arrow Logo, AMD Alchemy and combinations thereof, and Aml770, Aml771, and Aml772 are trademarks of Advanced Micro Devices, Inc. Windows and Windows NT are registered trademarks of Microsoft Corporation. Other names used herein may be trademarks of their respective companies.



RECYCLED & RECYCLABLE

Printed in the USA 26875A-US