

REVISIONS																				
LTR	DESCRIPTION										DATE (YR-MO-DA)					APPROVED				
A	Make changes to V_{IO} , $+I_{IB}$, $-I_{IB}$, I_{IO} , $+A_{VOL}$, $-A_{VOL}$, $+I_{CC}$, $-I_{CC}$, t_R , t_F tests and footnote three as specified under TABLE I. - ro										99-03-19					R. MONNIN				
B	Make change to 1.5 and glassivation as specified in APPENDIX A. - ro										99-04-15					R. MONNIN				

REV																					
SHEET																					
REV	B	B	B	B	B	B	B	B													
SHEET	15	16	17	18	19	20	21	22													
REV STATUS				REV				B	B	B	B	B	B	B	B	B	B	B	B		
OF SHEETS				SHEET				1	2	3	4	5	6	7	8	9	10	11	12	13	14
PMIC N/A				PREPARED BY RICK OFFICER							DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216										
STANDARD MICROCIRCUIT DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A				CHECKED BY RAJESH PITHADIA																	
				APPROVED BY RAYMOND MONNIN							MICROCIRCUIT, LINEAR, RADIATION HARDENED, LOW POWER, PROGRAMMABLE OPERATIONAL AMPLIFIER, MONOLITHIC SILICON										
				DRAWING APPROVAL DATE 98-10-15																	
								REVISION LEVEL A							SIZE A	CAGE CODE 67268	5962-95687				
SHEET 1 OF 22																					

1. SCOPE

1.1 Scope. This drawing documents two product assurance class levels consisting of high reliability (device classes Q and M) and space application (device class V). A choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of Radiation Hardness Assurance (RHA) levels are reflected in the PIN.

1.2 PIN. The PIN is as shown in the following example:

<u>5962</u>	<u>F</u>	<u>95687</u>	<u>01</u>	<u>V</u>	<u>G</u>	<u>A</u>
*	*		*	*	*	*
*	*		*	*	*	*
*	*		*	*	*	*
Federal stock class designator	RHA designator (see 1.2.1)	Device type (see 1.2.2)	Device class designator (see 1.2.3)	Case outline (see 1.2.4)	Lead finish (see 1.2.5)	
V						
Drawing number						

1.2.1 RHA designator. Device classes Q and V RHA marked devices meet the MIL-PRF-38535 specified RHA levels and are marked with the appropriate RHA designator. Device class M RHA marked devices meet the MIL-PRF-38535, appendix A specified RHA levels and are marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device type(s). The device type(s) identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	HS-3530ARH	Radiation hardened, dielectric isolated, low power programmable operational amplifier

1.2.3 Device class designator. The device class designator is a single letter identifying the product assurance level as follows:

<u>Device class</u>	<u>Device requirements documentation</u>
M	Vendor self-certification to the requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A
Q or V	Certification and qualification to MIL-PRF-38535

1.2.4 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
G	MACY1-X8	8	Can
X	CDFP3-F10	10	Flat pack

1.2.5 Lead finish. The lead finish is as specified in MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 2

1.3 Absolute maximum ratings. 1/

Voltage between +V _S and -V _S terminals	40 V
Differential input voltage	20 V
Voltage at either input terminal.....	+V _S to -V _S
I _{SET} (current at I _{SET}).....	500 μ A
V _{SET} (voltage to GND at I _{SET}).....	(+V _S - 2.0 V) < V _{SET} < +V _S
Output short circuit duration.....	Indefinite 2/
Maximum power dissipation (P _D) (T _A = +125°C):	
Case outline G	0.31 W
Case outline X.....	0.35 W
Junction temperature (T _J)	+175°C
Storage temperature range	-65°C to +150°C
Lead temperature (soldering 10 seconds).....	275°C
Thermal resistance, junction-to-case (Θ_{JC}):	
Case outline G	70°C/W
Case outline X.....	36°C/W
Thermal resistance, junction-to-ambient (Θ_{JA}):	
Case outline G	160°C/W
Case outline X.....	140°C/W

1.4 Recommended operating conditions.

Supply voltage range (V _S)	± 3 V to ± 15 V
Common mode input voltage (V _{INCM}).....	$\leq \frac{1}{2}$ (+V _S - -V _S)
Load resistance (R _L).....	≥ 2 k Ω
Ambient operating temperature range (T _A).....	-55°C to +125°C

1.5 Radiation features:

Maximum total dose available (dose rate = 50 – 300 rad(Si)/s)	300 Krads (Si)
Latch up.....	None 3/

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

- 1/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
- 2/ Caution. Continuous long duration short-circuit operation may degrade the operating life of the device.
- 3/ Not required for this technology.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 3

STANDARDS

DEPARTMENT OF DEFENSE

- MIL-STD-883 - Test Method Standard Microcircuits.
- MIL-STD-973 - Configuration Management.
- MIL-STD-1835 - Interface Standard For Microcircuit Case Outlines.

HANDBOOKS

DEPARTMENT OF DEFENSE

- MIL-HDBK-103 - List of Standard Microcircuit Drawings (SMD's).
- MIL-HDBK-780 - Standard Microcircuit Drawings.

(Unless otherwise indicated, copies of the specification, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements for device classes Q and V shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. The individual item requirements for device class M shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein.

3.1.1 Microcircuit die. For the requirements for microcircuit die, see appendix A to this document.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein for device classes Q and V or MIL-PRF-38535, appendix A and herein for device class M.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.3 Irradiation exposure circuit. The irradiation exposure circuit shall be as specified on figure 2.

3.3 Electrical performance characteristics and postirradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and postirradiation parameter limits are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table IIA. The electrical tests for each subgroup are defined in table I.

3.5 Marking. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked as listed in MIL-HDBK-103. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device. For RHA product using this option, the RHA designator shall still be marked. Marking for device classes Q and V shall be in accordance with MIL-PRF-38535. Marking for device class M shall be in accordance with MIL-PRF-38535, appendix A.

3.5.1 Certification/compliance mark. The certification mark for device classes Q and V shall be a "QML" or "Q" as required in MIL-PRF-38535. The compliance mark for device class M shall be a "C" as required in MIL-PRF-38535, appendix A.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions <u>1/</u> -55°C ≤ T _A ≤ +125°C unless otherwise specified	±V _S	Group A subgroups	Device type	Limits		Unit				
						Min	Max					
Input offset voltage	V _{IO}	V _{CM} = 0 V, I _{SET} = 1.5 μA and 15 μA M,D,P,L,R,F <u>2/</u>	±15 V	1	01	-3	3	mV				
				2,3		-5	5					
				1		-5	5					
		V _{CM} = 0 V, I _{SET} = 1.5 μA and 15 μA M,D,P,L,R,F <u>2/</u>	±3 V	1		-3	3					
				2,3		-5	5					
				1		-5	5					
		Input bias current	+I _{IB}	V _{CM} = 0 V, +R _S = 10 kΩ, -R _S = 100 Ω, I _{SET} = 15 μA M,D,P,L,R,F <u>2/</u>		±15 V	1		01	-40	40	nA
							2			-50	50	
3	-60				60							
1	-100				100							
-I _{IB}	V _{CM} = 0 V, +R _S = 100 Ω, -R _S = 10 kΩ, I _{SET} = 15 μA M,D,P,L,R,F <u>2/</u>		±15 V	1	01	-40	40	nA				
				2		-50	50					
				3		-60	60					
				1		-100	100					
Input offset current	I _{IO}	V _{CM} = 0 V, +R _S = 10 kΩ, -R _S = 100 Ω, I _{SET} = 15 μA M,D,P,L,R,F <u>2/</u>	±15 V	1	01	-15	15	nA				
				2		-20	20					
				3		-30	30					
				1		-30	30					
Large signal voltage gain	+A _{VOL}	V _{OUT} = 0 V and +10 V, <u>3/</u> I _{SET} = 1.5 μA M,D,P,L,R,F <u>2/</u>	±15 V	1	01	65		kV/V				
				2,3		25						
				1		15						
		V _{OUT} = 0 V and +10 V, <u>3/</u> I _{SET} = 15 μA M,D,P,L,R,F <u>2/</u>		1		80						
				2,3		50						
				1		30						
		V _{OUT} = 0 V and +1 V, <u>3/</u> I _{SET} = 1.5 μA M,D,P,L,R,F <u>2/</u>	±3 V	1	01	25		kV/V				
				2,3		15						
				1		10						
		V _{OUT} = 0 V and +1 V, <u>3/</u> I _{SET} = 15 μA M,D,P,L,R,F <u>2/</u>		1		25						
				2,3		25						
				1		10						

See footnote at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 5

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions <u>1/</u> -55°C ≤ T _A ≤ +125°C unless otherwise specified	±V _S	Group A subgroups	Device type	Limits		Unit
						Min	Max	
Large signal voltage gain	-A _{VOL}	V _{OUT} = 0 V and -10 V, <u>3/</u> I _{SET} = 1.5 μA <div>M,D,P,L,R,F <u>2/</u></div>	±15 V	1	01	65		kV/V
				2,3		25		
				1		15		
				1		80		
				2,3		50		
				1		30		
		V _{OUT} = 0 V and -10 V, <u>3/</u> I _{SET} = 15 μA <div>M,D,P,L,R,F <u>2/</u></div>	±3 V	1	01	25		kV/V
				2,3		15		
				1		10		
				1		25		
				2,3		25		
				1		10		
Common mode rejection ratio	+CMRR	ΔV _{CM} = +5 V, V _{OUT} = -5 V, +V _S = +10 V, -V _S = -20 V, I _{SET} = 1.5 μA and 15 μA	±15 V	1,2,3	01	80		dB
	-CMRR	ΔV _{CM} = -5 V, V _{OUT} = +5 V, +V _S = +20 V, -V _S = -10 V, I _{SET} = 1.5 μA and 15 μA	±15 V	1,2,3	01	80		dB
	+CMRR	ΔV _{CM} = +1.5 V, V _{OUT} = -1.5 V, +V _S = +1.5 V, -V _S = -4.5 V, I _{SET} = 1.5 μA and 15 μA	±3 V	1,2,3	01	80		dB
	-CMRR	ΔV _{CM} = -1.5 V, V _{OUT} = +1.5 V, +V _S = +4.5 V, -V _S = -1.5 V, I _{SET} = 1.5 μA and 15 μA	±3 V	1,2,3	01	80		dB

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
 DEFENSE SUPPLY CENTER COLUMBUS
 COLUMBUS, OHIO 43216-5000

SIZE
A

REVISION LEVEL
B

5962-95687

SHEET

6

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C ≤ T _A ≤ +125°C unless otherwise specified	±V _S	Group A subgroups	Device type	Limits		Unit
						Min	Max	
Output voltage swing	+V _{OUT}	<u>3</u> /	±15 V,	1	01	12.5		V
				2,3		10.5		
		<u>3</u> /	±3 V	1,2,3		2.0		
	-V _{OUT}	<u>3</u> /	±15 V,	1			-12.5	V
				2,3			-10.5	
		<u>3</u> /	±3 V	1,2,3			-2.0	
Output current	+I _{OUT}	I _{SET} = 1.5 μA, R _L = 2 kΩ	±15 V	1	01	0.25		mA
		I _{SET} = 15 μA, R _L = 2 kΩ				2.5		
	-I _{OUT}	I _{SET} = 1.5 μA, R _L = 2 kΩ		1			-0.25	mA
		I _{SET} = 15 μA, R _L = 2 kΩ					-2.5	
Quiescent power supply current	+I _{CC}	I _{SET} = 1.5 μA, I _{OUT} = 0 mA	±15 V	1,2,3	01		15	μA
		M,D,P,L,R,F <u>2</u> /		1			15	
		I _{SET} = 15 μA, I _{OUT} = 0 mA		1			150	
				2,3			160	
		M,D,P,L,R,F <u>2</u> /		1			160	
		I _{SET} = 1.5 μA, I _{OUT} = 0 mA	±3 V	1,2,3			15	
		M,D,P,L,R,F <u>2</u> /		1			15	
		I _{SET} = 15 μA, I _{OUT} = 0 mA		1			150	
				2,3			160	
		M,D,P,L,R,F <u>2</u> /		1			160	

See footnotes at end of table.

**STANDARD
MICROCIRCUIT DRAWING**
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 43216-5000

SIZE
A

REVISION LEVEL
B

5962-95687

SHEET

7

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C ≤ T _A ≤ +125°C unless otherwise specified	±V _S	Group A subgroups	Device type	Limits		Unit
						Min	Max	
Quiescent power supply current	-I _{CC}	I _{SET} 1.5 μA, I _{OUT} = 0 mA	±15 V	1,2,3	01	-15		μA
		M,D,P,L,R,F 2/		1		-15		
		I _{SET} 15 μA, I _{OUT} = 0 mA		1		-150		
		M,D,P,L,R,F 2/		2,3		-160		
		M,D,P,L,R,F 2/		1		-160		
		I _{SET} = 1.5 μA, I _{OUT} = 0 mA	±3 V	1,2,3		-15		
		M,D,P,L,R,F 2/		1		-15		
		I _{SET} 15 μA, I _{OUT} = 0 mA		1		-150		
		M,D,P,L,R,F 2/		2,3		-160		
		M,D,P,L,R,F 2/		1		-160		
Power supply rejection ratio	+PSRR	ΔV _S = 10 V, I _{SET} = 1.5 μA and 15 μA, +V _S = +10 V, -V _S = -15 V, +V _S = +20 V, -V _S = -15 V	±15 V	1,2,3	01	80		dB
		ΔV _S = 1.5 V, I _{SET} = 1.5 μA and 15 μA, +V _S = +3 V, -V _S = -3 V, +V _S = +4.5 V, -V _S = -3 V	±3 V			80		
	-PSRR	ΔV _S = 10 V, I _{SET} = 1.5 μA and 15 μA, +V _S = +15 V, -V _S = -10 V, +V _S = +15 V, -V _S = -20 V	±15 V	1,2,3		80		dB
		ΔV _S = 1.5 V, I _{SET} = 1.5 μA and 15 μA, +V _S = +3 V, -V _S = -3 V, +V _S = +3 V, -V _S = -4.5 V	±3 V			80		

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
 DEFENSE SUPPLY CENTER COLUMBUS
 COLUMBUS, OHIO 43216-5000

SIZE
A

REVISION LEVEL
B

5962-95687

SHEET

8

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions <u>1/</u> -55°C ≤ T _A ≤ +125°C unless otherwise specified	±V _S	Group A subgroups	Device type	Limits		Unit		
						Min	Max			
Slew rate <u>4/</u>	+SR	V _{OUT} = -10 V to +10 V, I _{SET} = 1.5 μA	±15 V	4	01	0.025		V/μs		
		V _{OUT} = -10 V to +10 V, I _{SET} = 15 μA				0.25				
		V _{OUT} = -2 V to +2 V, I _{SET} = 1.5 μA	±3 V	4		0.01				
		V _{OUT} = -2 V to +2 V, I _{SET} = 15 μA				0.1				
	-SR	V _{OUT} = +10 V to -10 V, I _{SET} = 1.5 μA	±15 V	4		0.025		V/μs		
		V _{OUT} = +10 V to -10 V, I _{SET} = 15 μA				0.25				
		V _{OUT} = +2 V to -2 V, I _{SET} = 1.5 μA	±3 V	4		0.01				
		V _{OUT} = +2 V to -2 V, I _{SET} = 15 μA				0.1				
Rise and fall <u>4/</u> time	t _R	V _{OUT} = 0 mV to +400 mV, I _{SET} = 1.5 μA, t _R measured at 10 % and 90 % points	±15 V	9	01		10	μs		
		V _{OUT} = 0 mV to +400 mV, I _{SET} = 15 μA, t _R measured at 10 % and 90 % points					1.0			
	t _F	V _{OUT} = 0 mV to -400 mV, I _{SET} = 1.5 μA, t _F measured at 10 % and 90 % points		9			10	μs		
		V _{OUT} = 0 mV to -400 mV, I _{SET} = 15 μA, t _F measured at 10 % and 90 % points					1.0			
	Overshoot <u>4/</u>	+OS	V _{OUT} = 0 mV to +400 mV, I _{SET} = 1.5 μA and 15 μA	±15 V		4	01		35	%
		-OS	V _{OUT} = 0 mV to -400 mV, I _{SET} = 1.5 μA and 15 μA						35	%

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
 DEFENSE SUPPLY CENTER COLUMBUS
 COLUMBUS, OHIO 43216-5000

SIZE
A

REVISION LEVEL
B

5962-95687

SHEET

9

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions ^{1/} -55°C ≤ T _A ≤ +125°C unless otherwise specified	±V _S	Group A subgroups	Device type	Limits		Unit
						Min	Max	
Full ^{5/} ^{6/} ^{7/} power bandwidth	FPBW	V _{PEAK} = 10 V, I _{SET} = 1.5 μA	±15 V	4	01	0.39		kHz
		V _{PEAK} = 10 V, I _{SET} = 15 μA				3.9		
Quiescent ^{5/} ^{6/} power ^{8/} consumption	PC	V _{OUT} = 0 V, I _{OUT} = 0 mA, I _{SET} = 1.5 μA and 15 μA	±15 V	1,2,3	01		4.8	mW

^{1/} Unless otherwise specified, output voltage (V_{OUT}) = 0 V, source resistance (R_S) = 100 Ω, and load resistance (R_L) = 500 kΩ.

^{2/} Devices supplied to this drawing are only radiation tested for the parameter referencing this footnote. They meet all levels M, D, P, L, R, and F of irradiation, however, this device is only tested at the F level at T_A = +25°C.

^{3/} R_L = 86 kΩ at I_{SET} = 1.5 μA and R_L = 5 kΩ at I_{SET} = 15 μA.

^{4/} Unless otherwise specified, load capacitance (C_L) = 100 pF, gain (A_{VCL}) = +1, and load resistance (R_L) = 75 kΩ.

^{5/} If not tested, shall be guaranteed to the limits specified in table I herein.

^{6/} Unless otherwise specified, load capacitance (C_L) = 100 pF, gain (A_{VCL}) = +1, and source resistance (R_S) = 50 Ω.

^{7/} Full power bandwidth guarantee based on slew rate measurement using FPBW = slew rate / (2 × π × V_{PEAK}).

^{8/} Quiescent power consumption based upon quiescent supply current test maximum. No load on outputs.

3.6 Certificate of compliance. For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 6.6.1 herein). For device class M, a certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6.2 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply for this drawing shall affirm that the manufacturer's product meets, for device classes Q and V, the requirements of MIL-PRF-38535 and herein or for device class M, the requirements of MIL-PRF-38535, appendix A and herein.

3.7 Certificate of conformance. A certificate of conformance as required for device classes Q and V in MIL-PRF-38535 or for device class M in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change for device class M. For device class M, notification to DSCC-VA of change of product (see 6.2 herein) involving devices acquired to this drawing is required for any change as defined in MIL-STD-973.

3.9 Verification and review for device class M. For device class M, DSCC, DSCC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

3.10 Microcircuit group assignment for device class M. Device class M devices covered by this drawing shall be in microcircuit group number 49 (see MIL-PRF-38535, appendix A).


STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 10

Device type	01	
Case outlines	G	X
Terminal number	Terminal symbol	
1	OFFSET NULL	NC
2	-INPUT	OFFSET NULL
3	+INPUT	-INPUT
4	-V _S	+INPUT
5	OFFSET NULL	-V _S
6	OUTPUT	NC
7	+V _S	OFFSET NULL
8	I _{SET}	OUTPUT
9	---	+V _S
10	---	I _{SET}

NC = Not connected

FIGURE 1. Terminal connections.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 11

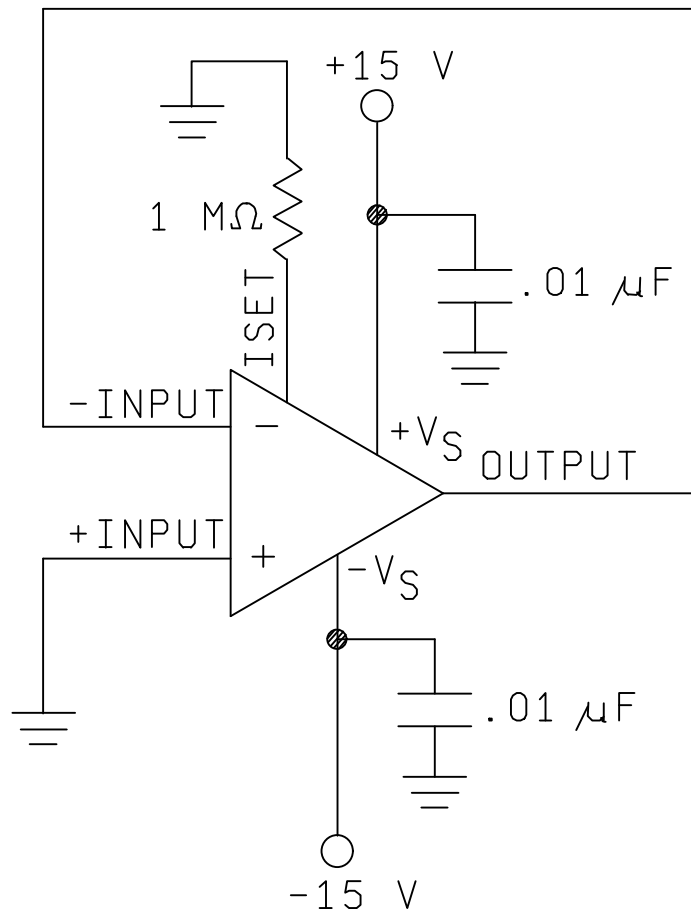

NOTE: Group E inspection is conducted on parts assembled in case outline G only.

FIGURE 2. Irradiation circuit.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 12

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. For device classes Q and V, sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. For device class M, sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. For device classes Q and V, screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and technology conformance inspection. For device class M, screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection.

4.2.1 Additional criteria for device class M.

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015.

(2) $T_A = +125^{\circ}\text{C}$, minimum.

b. Interim and final electrical test parameters shall be as specified in table IIA herein.

4.2.2 Additional criteria for device classes Q and V.

a. The burn-in test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document revision level control of the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table IIA herein.

c. Additional screening for device class V beyond the requirements of device class Q shall be as specified in MIL-PRF-38535, appendix B or as modified in QM plan.

4.3 Qualification inspection for device classes Q and V. Qualification inspection for device classes Q and V shall be in accordance with MIL-PRF-38535. Inspections to be performed shall be those specified in MIL-PRF-38535 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4 Conformance inspection. Technology conformance inspection for classes Q and V shall be in accordance with MIL-PRF-38535 and as specified in the QM plan including groups A, B, C, D, and E inspections and as specified herein except where option 2 of MIL-PRF-38535 permits alternate in-line control testing. Quality conformance inspection for device class M shall be in accordance with MIL-PRF-38535, appendix A and as specified herein. Inspections to be performed for device class M shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection.

a. Tests shall be as specified in table IIA herein.

b. Subgroups 7, 8, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 13

TABLE IIA. Electrical test requirements.

Test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)	Subgroups (in accordance with MIL-PRF-38535, table III)	
	Device class M	Device class Q	Device class V
Interim electrical parameters (see 4.2)	1,4,9	1,4,9	1,4,9
Final electrical parameters (see 4.2)	1,2,3,4,5,6,9 <u>1/</u>	1,2,3,4, <u>1/</u> 4,5,6,9	1,2,3, <u>1/ 2/</u> 4,5,6,9
Group A test requirements (see 4.4)	1,2,3,4,5,6,9	1,2,3,4,5,6,9	1,2,3,4,5,6,9
Group C end-point electrical parameters (see 4.4)	1,2,3,4,5,6,9	1,2,3,4,5,6,9	1,2,3, <u>2/</u> 4,5,6,9
Group D end-point electrical parameters (see 4.4)	1,4,9	1,4,9	1,4,9
Group E end-point electrical parameters (see 4.4)	1,4,9	1,4,9	1,4,9

1/ PDA applies to subgroup 1. For class V, PDA applies to subgroup 1 and Δ 's.

2/ Delta limits as specified in table IIB shall be required where specified, and the delta limits shall be computed with reference to the zero hour electrical parameters (see Table I).

Table IIB. Burn-in and operating life test delta parameters. ($T_A = +25^\circ\text{C}$).

Parameter	Symbol	Conditions	Delta limits
Input offset voltage	V_{IO}	$\pm V_S = \pm 15 \text{ V}$, $I_{SET} = 1.5 \mu\text{A}$ and $15 \mu\text{A}$	$\pm 1.5 \text{ mV}$
Input bias current	$\pm I_{IB}$	$\pm V_S = \pm 15 \text{ V}$, $I_{SET} = 15 \mu\text{A}$	$\pm 30 \text{ nA}$

4.4.2 Group C inspection. The group C inspection end-point electrical parameters shall be as specified in table IIA herein.

4.4.2.1 Additional criteria for device class M. Steady-state life test conditions, method 1005 of MIL-STD-883:

- Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
- $T_A = +125^\circ\text{C}$, minimum.
- Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 14

4.4.2.2 Additional criteria for device classes Q and V. The steady-state life test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The test circuit shall be maintained under document revision level control by the device manufacturer's TRB in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

4.4.3 Group D inspection. The group D inspection end-point electrical parameters shall be as specified in table IIA herein.

4.4.4 Group E inspection. Group E inspection is required only for parts intended to be marked as radiation hardness assured (see 3.5 herein).

- a. End-point electrical parameters shall be as specified in table IIA herein.
- b. For device classes Q and V, the devices or test vehicle shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535 for the RHA level being tested. For device class M, the devices shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535, appendix A for the RHA level being tested. All device classes must meet the postirradiation end-point electrical parameter limits as defined in table I at $T_A = +25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, after exposure, to the subgroups specified in table IIA herein.
- c. When specified in the purchase order or contract, a copy of the RHA delta limits shall be supplied.

4.4.4.1 Total dose irradiation testing. Total dose irradiation testing shall be performed in accordance with MIL-STD-883 method 1019, condition A and as specified herein.

4.4.4.1.1 Accelerated aging test. Accelerated aging tests shall be performed on all devices requiring a RHA level greater than 5k rads(Si). The post-anneal end-point electrical parameter limits shall be as specified in table I herein and shall be the pre-irradiation end-point electrical parameter limit at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$. Testing shall be performed at initial qualification and after any design or process changes which may affect the RHA response of the device.

4.4.4.2 Neutron testing. When requested by the customer, neutron testing shall be performed in accordance with test method 1017 of MIL-STD-883 and herein (see 1.5). All device classes must meet the post irradiation end-point electrical parameter limits as defined in table I, for the subgroups specified in Table IIA herein at $T_A = +25^{\circ}\text{C} \pm 5^{\circ}\text{C}$.

4.4.4.3 Dose rate induced latchup testing. Dose rate induced latchup testing shall be performed in accordance with test method 1020 of MIL-STD-883 and as specified herein (see 1.5). Tests shall be performed on devices, SEC, or approved test structures at technology qualification and after any design or process changes which may effect the RHA capability of the process.

4.4.4.4 Dose rate burnout. When required by the customer, test shall be performed on devices, SEC, or approved test structures at technology qualifications and after any design or process changes which may effect the RHA capability of the process. Dose rate burnout shall be performed in accordance with test method 1023 of MIL-STD-883 and as specified herein.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.1.1 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor prepared specification or drawing.

6.1.2 Substitutability. Device class Q devices will replace device class M devices.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 15

6.2 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-973 using DD Form 1692, Engineering Change Proposal.

6.3 Record of users. Military and industrial users should inform Defense Supply Center Columbus when a system application requires configuration control and which SMD's are applicable to that system. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0525.

6.4 Comments. Comments on this drawing should be directed to DSCC-VA , Columbus, Ohio 43216-5000, or telephone (614) 692-0674.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535 and MIL-HDBK-1331.

6.6 Sources of supply.

6.6.1 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in QML-38535. The vendors listed in QML-38535 have submitted a certificate of compliance (see 3.6 herein) to DSCC-VA and have agreed to this drawing.

6.6.2 Approved sources of supply for device class M. Approved sources of supply for class M are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DSCC-VA.


STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 16

APPENDIX A
APPENDIX A FORMS A PART OF SMD 5962-95687

10. SCOPE

10.1 Scope. This appendix establishes minimum requirements for microcircuit die to be supplied under the Qualified Manufacturers List (QML) Program. QML microcircuit die meeting the requirements of MIL-PRF-38535 and the manufacturers approved QM plan for use in monolithic microcircuits, multichip modules (MCMs), hybrids, electronic modules, or devices using chip and wire designs in accordance with MIL-PRF-38534 are specified herein. Two product assurance classes consisting of military high reliability (device class Q) and space application (device Class V) are reflected in the Part or Identification Number (PIN). When available a choice of Radiation Hardness Assurance (RHA) levels are reflected in the PIN.

10.2 PIN. The PIN is as shown in the following example:

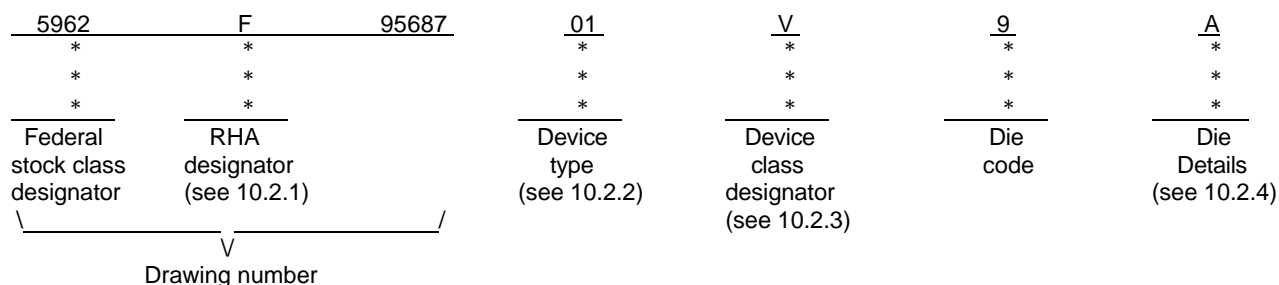

10.2.1 RHA designator. Device classes Q and V RHA identified die shall meet the MIL-PRF-38535 specified RHA levels. A dash (-) indicates a non-RHA die.

10.2.2 Device type(s). The device type(s) shall identify the circuit function as follows:

Device type	Generic number	Circuit function
01	HS-3530ARH	Radiation hardened, DI low power, programmable operational amplifier

10.2.3 Device class designator.

Device class	Device requirements documentation
Q or V	Certification and qualification to the die requirements of MIL-PRF-38535

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 17

APPENDIX A
APPENDIX A FORMS A PART OF SMD 5962-95687

10.2.4. Die Details. The die details designation shall be a unique letter which designates the die-s physical dimensions, bonding pad location(s) and related electrical function(s), interface materials, and other assembly related information, for each product and variant supplied to this appendix.

10.2.4.1 Die physical dimensions.

Die type	Figure number
01	A-1

10.2.4.2. Die bonding pad locations and electrical functions.

Die type	Figure number
01	A-1

10.2.4.3. Interface materials.

Die type	Figure number
01	A-1

10.2.4.4. Assembly related information.

Die type	Figure number
01	A-1

10.3. Absolute maximum ratings. See paragraph 1.3 within the body of this drawing for details.

10.4 Recommended operating conditions. See paragraph 1.4 within the body of this drawing for details.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 18

APPENDIX A
APPENDIX A FORMS A PART OF SMD 5962-95687

20. APPLICABLE DOCUMENTS.

20.1 Government specifications, standards, and handbooks. Unless otherwise specified, the following specification, standard, and handbook of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-883 - Test Method Standard Microcircuits.

HANDBOOK

DEPARTMENT OF DEFENSE

MIL-HDBK-103 - List of Standard Microcircuit Drawings (SMD-s).

(Copies of the specification, standard, and handbook required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity).

20.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

30. REQUIREMENTS

30.1 Item requirements. The individual item requirements for device classes Q and V shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not effect the form, fit or function as described herein.

30.2 Design, construction and physical dimensions. The design, construction and physical dimensions shall be as specified in MIL-PRF-38535 and the manufacturer's QM plan, for device classes Q and V and herein.

30.2.1 Die physical dimensions. The die physical dimensions shall be as specified in 10.2.4.1 and on figure A-1.

30.2.2 Die bonding pad locations and electrical functions. The die bonding pad locations and electrical functions shall be as specified in 10.2.4.2 and on figure A-1.

30.2.3 Interface materials. The interface materials for the die shall be as specified in 10.2.4.3 and on figure A-1.

30.2.4 Assembly related information. The assembly related information shall be as specified in 10.2.4.4 and figure A-1.

30.2.5 Radiation exposure circuit. The radiation exposure circuit shall be as defined within paragraph 3.2.3 of the body of this document.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 19

APPENDIX A
APPENDIX A FORMS A PART OF SMD 5962-95687

30.3 Electrical performance characteristics and post-irradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and post-irradiation parameter limits are as specified in table I of the body of this document.

30.4 Electrical test requirements. The wafer probe test requirements shall include functional and parametric testing sufficient to make the packaged die capable of meeting the electrical performance requirements in table I.

30.5 Marking. As a minimum, each unique lot of die, loaded in single or multiple stack of carriers, for shipment to a customer, shall be identified with the wafer lot number, the certification mark, the manufacturer's identification and the PIN listed in 10.2 herein. The certification mark shall be a "QML" or "Q" as required by MIL-PRF-38535.

30.6 Certification of compliance. For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 60.4 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply for this appendix shall affirm that the manufacturer's product meets, for device classes Q and V, the requirements of MIL-PRF-38535 and the requirements herein.

30.7 Certificate of conformance. A certificate of conformance as required for device classes Q and V in MIL-PRF-38535 shall be provided with each lot of microcircuit die delivered to this drawing.

40. QUALITY ASSURANCE PROVISIONS

40.1 Sampling and inspection. For device classes Q and V, die sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modifications in the QM plan shall not effect the form, fit or function as described herein.

40.2 Screening. For device classes Q and V, screening shall be in accordance with MIL-PRF-38535, and as defined in the manufacturer's QM plan. As a minimum it shall consist of:

- a) Wafer lot acceptance for Class V product using the criteria defined within MIL-STD-883 test method 5007.
- b) 100% wafer probe (see paragraph 30.4).
- c) 100% internal visual inspection to the applicable class Q or V criteria defined within MIL-STD-883 test method 2010 or the alternate procedures allowed within MIL-STD-883 test method 5004.

40.3 Conformance inspection.

40.3.1 Group E inspection. Group E inspection is required only for parts intended to be identified as radiation assured (see 30.5 herein). RHA levels for device classes Q and V shall be as specified in MIL-PRF-38535. End point electrical testing of packaged die shall be as specified in table IIA herein. Group E tests and conditions are as specified within paragraphs 4.4.4.1, 4.4.4.1.1., 4.4.4.2, 4.4.4.3, and 4.4.4.4.

50. DIE CARRIER

50.1 Die carrier requirements. The requirements for the die carrier shall be accordance with the manufacturer's QM plan or as specified in the purchase order by the acquiring activity. The die carrier shall provide adequate physical, mechanical and electrostatic protection.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 20

APPENDIX A
APPENDIX A FORMS A PART OF SMD 5962-95687

60 NOTES

60.1 Intended use. Microcircuit die conforming to this drawing are intended for use in microcircuits built in accordance with MIL-PRF-38535 or MIL-PRF-38534 for government microcircuit applications (original equipment), design applications and logistics purposes.

60.2 Comments. Comments on this appendix should be directed to DSCC-VA, Columbus, Ohio, 43216-5000 or telephone (614)-692-0536.


60.3 Abbreviations, symbols and definitions. The abbreviations, symbols, and definitions used herein are defined within MIL-PRF-38535 and MIL-STD-1331.

60.4 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in QML-38535. The vendors listed within QML-38535 have submitted a certificate of compliance (see 30.6 herein) to DSCC-VA and have agreed to this drawing.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 21

APPENDIX A

APPENDIX A FORMS A PART OF SMD 5962-95687

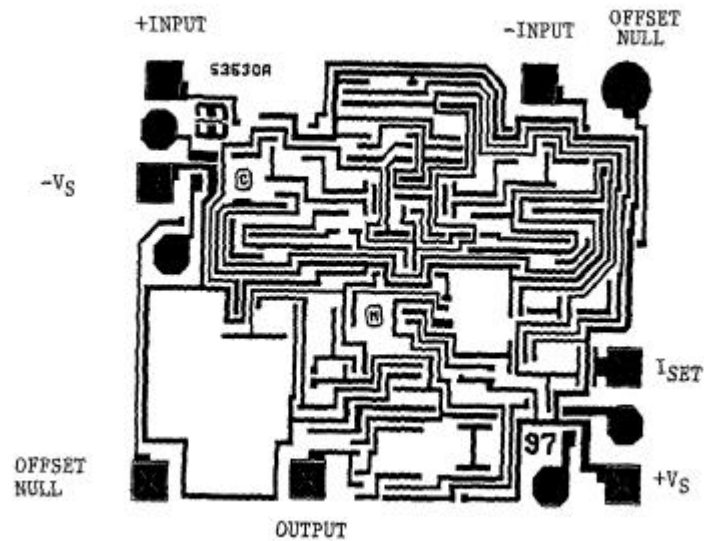

Die bonding pad locations and electrical functions

Die physical dimensions.

Die size: 1720 microns x 1390 microns

Die thickness: 19 ±1 mils

Interface materials.

Top metallization: Al Si Cu 16.0 kÅ ±2 kÅ

Backside metallization: None

Glassivation.

Type: PSG

Thickness: 8.0 kÅ ±1.0 kÅ

Substrate: Dielectric Isolation (DI)

Assembly related information.

Substrate potential: Insulator

Special assembly instructions: None

FIGURE A-1. Die bonding pad locations and electrical functions.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-95687
		REVISION LEVEL B	SHEET 22

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 99-04-15

Approved sources of supply for SMD 5962-95687 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962F9568701QGA	34371	HS2-3530ARH-8
5962F9568701VGA	34371	HS2-3530ARH-Q
5962F9568701VXC	34371	HS9-3530ARH-Q
5962F9568701V9A	34371	HS0-3530ARH-Q

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE
number

34371

Vendor name
and address

Harris Semiconductor
PO Box 883
Melbourne, FL 32902-0883

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.