

Real-Time Clock (RTC)

Features

- Direct clock/calendar replacement for IBM® AT-compatible computers and other applications
- Functionally compatible with the DS1285
 - Closely matches MC146818A pin configuration
- 114 bytes of general nonvolatile storage
- 160ns cycle time allows fast bus operation
- Selectable Intel or Motorola bus timing
- Less than 0.5μA load under battery operation
- 14 bytes for clock/calendar and control
- BCD or binary format for clock and calendar data

- Calendar in day of the week, day of the month, months, and years, with automatic leap-year adjustment
- Time of day in seconds, minutes, and hours
 - 12- or 24-hour format
 - Optional daylight saving adjustment
- Programmable square wave output
- Three individually maskable interrupt event flags:
 - Periodic rates from 122μs to 500ms
 - Time-of-day alarm once per second to once per day
 - End-of-clock update cycle
- 24-pin plastic DIP or SOIC

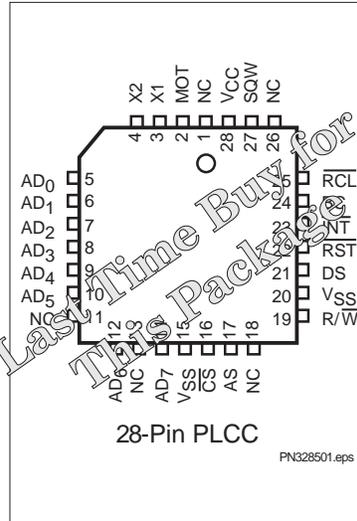
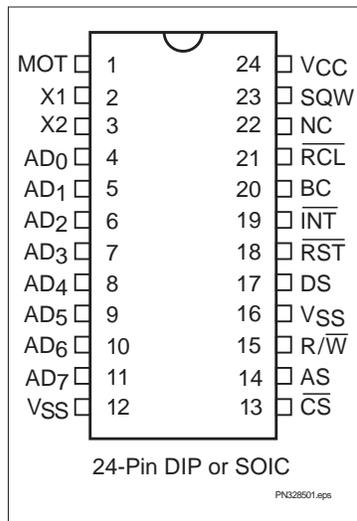
General Description

The CMOS bq3285 is a low-power microprocessor peripheral providing a time-of-day clock and 100-year calendar with alarm features and battery operation. Other features include three maskable interrupt sources, square wave output, and 114 bytes of general nonvolatile storage.

The bq3285 write-protects the clock, calendar, and storage registers during power failure. A backup battery then maintains data and operates the clock and calendar.

The bq3285 is a fully compatible real-time clock for IBM AT compatible computers and other applications. The only external components are a 32.768kHz crystal and a backup battery

Pin Connections




Pin Names

| | |
|----------------------------------|---------------------------------------|
| AD ₀ -AD ₇ | Multiplexed address/data input/output |
| MOT | Bus type select input |
| CS | Chip select input |
| AS | Address strobe input |
| DS | Data strobe input |
| R/W | Read/write input |
| INT | Interrupt request output |
| RST | Reset input |
| SQW | Square wave output |
| RCL | RAM clear input |
| BC | 3V backup cell input |
| X1-X2 | Crystal inputs |
| NC | No connect |
| V _{CC} | +5V supply |
| V _{SS} | Ground |

bq3285

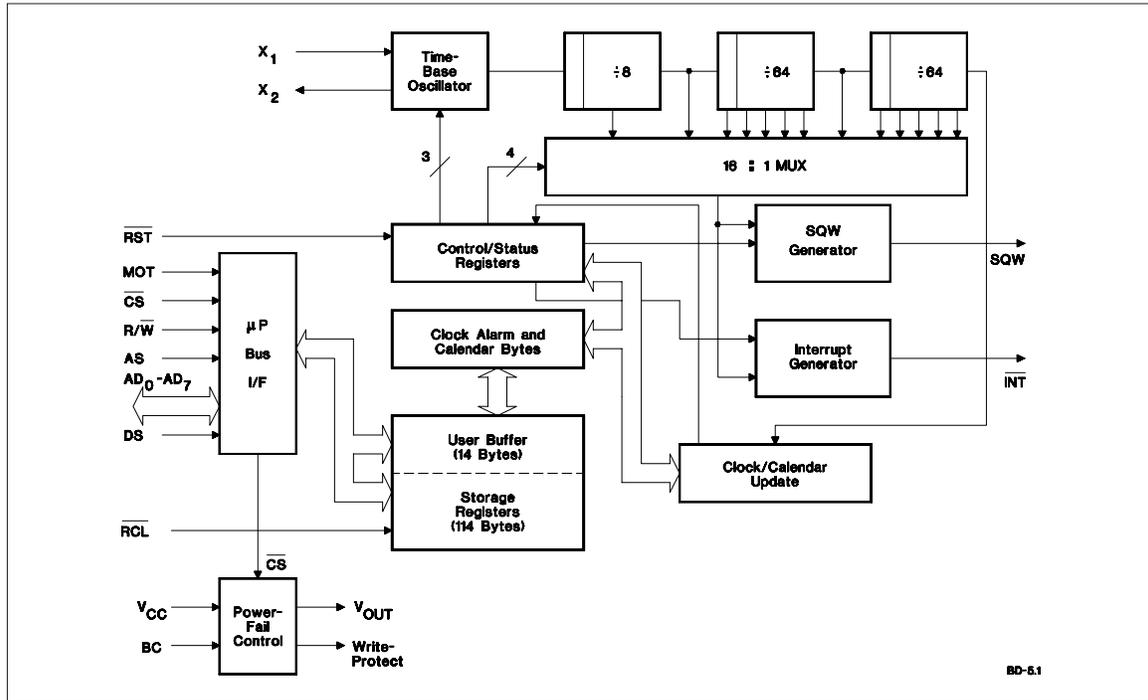Block Diagram



Pin Descriptions

MOT Bus type select input

MOT selects bus timing for either Motorola or Intel architecture. This pin should be tied to V_{CC} for Motorola timing or to V_{SS} for Intel timing (see Table 1). The setting should not be changed during system operation. MOT is internally pulled low by a 30K Ω resistor.

Table 1. Bus Setup

| Bus Type | MOT Level | DS Equivalent | R/W Equivalent | AS Equivalent |
|----------|-----------|---|---|---------------|
| Motorola | V_{CC} | DS, E, or $\Phi 2$ | R/\overline{W} | AS |
| Intel | V_{SS} | \overline{RD} , \overline{MEMR} , or I/OR | \overline{WR} , \overline{MEMW} , or I/OW | ALE |

AD₀-AD₇ Multiplexed address/data input/output

The bq3285 bus cycle consists of two phases: the address phase and the data-transfer phase. The address phase precedes the data-transfer phase. During the address phase, an address placed on AD₀-AD₇ is latched into the bq3285 on the falling edge of the AS signal. During the data-transfer phase of the bus cycle, the AD₀-AD₇ pins serve as a bidirectional data bus.

AS Address strobe input

AS serves to demultiplex the address/data bus. The falling edge of AS latches the address on AD₀-AD₇. This demultiplexing process is independent of the CS signal. For DIP, SOIC, and PLCC packages with MOT = V_{CC} , the AS input is provided a signal similar to ALE in an Intel-based system.

| | | | |
|------------------------------------|--|------------------------------------|--|
| DS | <p>Data strobe input</p> <p>When $MOT = V_{CC}$, DS controls data transfer during a bq3285 bus cycle. During a read cycle, the bq3285 drives the bus after the rising edge on DS. During a write cycle, the falling edge on DS is used to latch write data into the chip.</p> <p>When $MOT = V_{SS}$, the DS input is provided a signal similar to \overline{RD}, \overline{MEMR}, or $\overline{I/OR}$ in an Intel-based system. The falling edge on DS is used to enable the outputs during a read cycle.</p> | \overline{RCL} | <p>RAM clear input</p> <p>A low level on the \overline{RCL} pin causes the contents of each of the 114 storage bytes to be set to FF(hex). The contents of the clock and control registers are unaffected. This pin should be used as a user-interface input (pushbutton to ground) and not connected to the output of any active component. RCL input is only recognized when held low for at least 125ms in the presence of V_{CC} when the oscillator is running. Using RAM clear does not affect the battery load. This pin is connected internally to a 30KΩ pull-up resistor.</p> |
| $\overline{R/W}$ | <p>Read/write input</p> <p>When $MOT = V_{CC}$, the level on $\overline{R/W}$ identifies the direction of data transfer. A high level on $\overline{R/W}$ indicates a read bus cycle, whereas a low on this pin indicates a write bus cycle.</p> <p>When $MOT = V_{SS}$, $\overline{R/W}$ is provided a signal similar to \overline{WR}, \overline{MEMW}, or $\overline{I/OW}$ in an Intel-based system. The rising edge on $\overline{R/W}$ latches data into the bq3285.</p> | BC | <p>3V backup cell input</p> <p>BC should be connected to a 3V backup cell for RTC operation and storage register non-volatility in the absence of power. When V_{CC} slews down past V_{BC} (3V typical), the integral control circuitry switches the power source to BC. When V_{CC} returns above V_{BC}, the power source is switched to V_{CC}.</p> <p>Upon power-up, a voltage within the V_{BC} range must be present on the BC pin for the oscillator to start up.</p> |
| \overline{CS} | <p>Chip select input</p> <p>\overline{CS} should be driven low and held stable during the data-transfer phase of a bus cycle accessing the bq3285.</p> | \overline{RST} | <p>Reset input</p> <p>The bq3285 is reset when \overline{RST} is pulled low. When reset, \overline{INT} becomes high-impedance, and the bq3285 is not accessible. Table 4 in the Control/Status Registers section lists the register bits that are cleared by a reset.</p> <p>Reset may be disabled by connecting \overline{RST} to V_{CC}. This allows the control bits to retain their states through power-down/power-up cycles.</p> |
| \overline{INT} | <p>Interrupt request output</p> <p>\overline{INT} is an open-drain output. \overline{INT} is asserted low when any event flag is set and the corresponding event enable bit is also set. \overline{INT} becomes high-impedance whenever register C is read (see the Control/Status Registers section).</p> | X1-X2 | <p>Crystal inputs</p> <p>The X1-X2 inputs are provided for an external 32.768Khz quartz crystal, Daiwa DT-26 or equivalent, with 6pF load capacitance. A trimming capacitor may be necessary for extremely precise time-base generation.</p> <p>In the absence of a crystal, an oscillated output of 32.768kHz can be fed into the X1 input.</p> |
| SQW | <p>Square-wave output</p> <p>SQW may output a programmable frequency square-wave signal during normal (V_{CC} valid) system operation. Any one of the 13 specific frequencies may be selected through register A. This pin is held low when the square-wave enable bit (SQWE) in register B is 0 (see the Control/Status Registers section).</p> | | |

bq3285

Functional Description

Address Map

The bq3285 provides 14 bytes of clock and control/status registers and 114 bytes of general nonvolatile storage. Figure 1 illustrates the address map for the bq3285.

Update Period

The update period for the bq3285 is one second. The bq3285 updates the contents of the clock and calendar locations during the update cycle at the end of each up-

date period (see Figure 2). The alarm flag bit may also be set during the update cycle.

The bq3285 copies the local register updates into the user buffer accessed by the host processor. When a 1 is written to the update transfer inhibit bit (UTI) in register B, the user copy of the clock and calendar bytes remains unchanged, while the local copy of the same bytes continues to be updated every second.

The update-in-progress bit (UIP) in register A is set t_{BUC} time before the beginning of an update cycle (see Figure 2). This bit is cleared and the update-complete flag (UF) is set at the end of the update cycle.

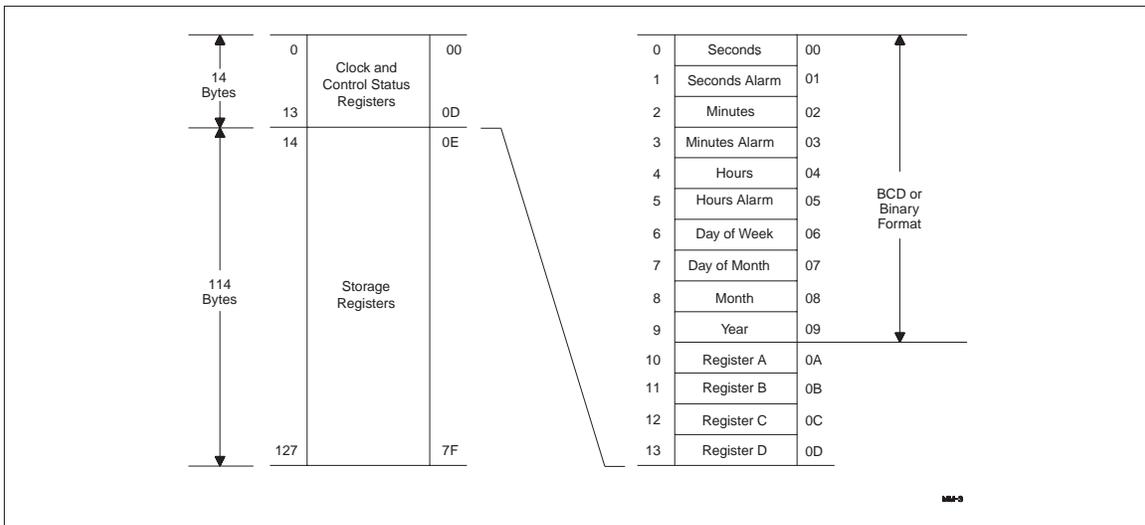


Figure 1. Address Map

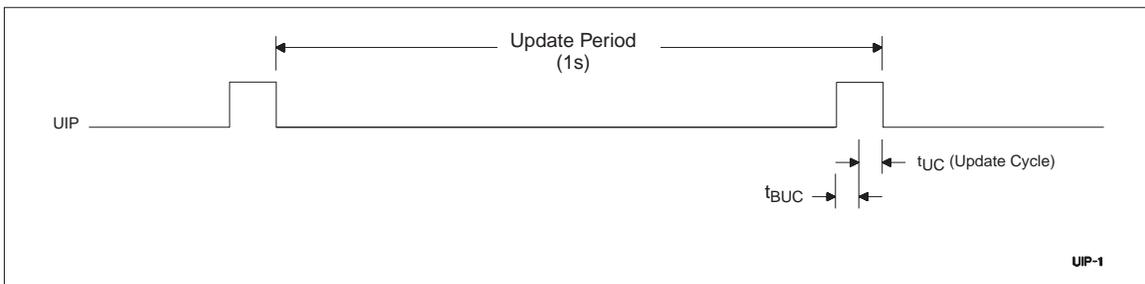


Figure 2. Update Period Timing and UIP

Programming the RTC

The time-of-day, alarm, and calendar bytes can be written in either the BCD or binary format (see Table 2).

These steps may be followed to program the time, alarm, and calendar:

1. Modify the contents of register B:
 - a. Write a 1 to the UTI bit to prevent transfers between RTC bytes and user buffer.
 - b. Write the appropriate value to the data format (DF) bit to select BCD or binary format for all time, alarm, and calendar bytes.
2. Write new values to all the time, alarm, and calendar locations.
3. Clear the UTI bit to allow update transfers.

On the next update cycle, the RTC updates all 10 bytes in the selected format.

Table 2. Time, Alarm, and Calendar Formats

| Address | RTC Bytes | Range | | |
|---------|-----------------------------|---------|---------------------------|---------------------------|
| | | Decimal | Binary | Binary-Coded Decimal |
| 0 | Seconds | 0–59 | 00H–3BH | 00H–59H |
| 1 | Seconds alarm | 0–59 | 00H–3BH | 00H–59H |
| 2 | Minutes | 0–59 | 00H–3BH | 00H–59H |
| 3 | Minutes alarm | 0–59 | 00H–3BH | 00H–59H |
| 4 | Hours, 12-hour format | 1–12 | 01H–0CH AM; 81H–8CH PM | 01H–12H AM; 81H–92H PM |
| | Hours, 24-hour format | 0–23 | 00H–17H | 00H–23H |
| 5 | Hours alarm, 12-hour format | 1–12 | 01H–0CH AM; 81H–8CH PM | 01H–12H AM; 81H–92H PM |
| | Hours alarm, 24-hour format | 0–23 | 00H–17H | 00H–23H |
| 6 | Day of week (1=Sunday) | 1–7 | 01H–07H | 01H–07H |
| 7 | Day of month | 1–31 | 01H–1FH | 01H–31H |
| 8 | Month | 1–12 | 01H–0CH | 01H–12H |
| 9 | Year | 0–99 | 00H–63H | 00H–99H |

bq3285

Square-Wave Output

The bq3285 divides the 32.768kHz oscillator frequency to produce the 1Hz update frequency for the clock and calendar. Thirteen taps from the frequency divider are fed to a 16:1 multiplexer circuit. The output of this mux is fed to the SQW output and periodic interrupt generation circuitry. The four least-significant bits of register A, RS0–RS3, select among the 13 taps (see Table 3). The square-wave output is enabled by writing a 1 to the square-wave enable bit (SQWE) in register B.

Interrupts

The bq3285 allows three individually selected interrupt events to generate an interrupt request. These three interrupt events are:

- The periodic interrupt, programmable to occur once every 122µs to 500ms
- The alarm interrupt, programmable to occur once per second to once per day

- The update-ended interrupt, which occurs at the end of each update cycle

Each of the three interrupt events is enabled by an individual interrupt-enable bit in register B. When an event occurs, its event flag bit in register C is set. If the corresponding event enable bit is also set, then an interrupt request is generated. The interrupt request flag bit (INTF) of register C is set with every interrupt request. Reading register C clears all flag bits, including INTF, and makes INT high-impedance.

Two methods can be used to process bq3285 interrupt events:

- Enable interrupt events and use the interrupt request output to invoke an interrupt service routine.
- Do not enable the interrupts and use a polling routine to periodically check the status of the flag bits.

The individual interrupt sources are described in detail in the following sections.

Table 3. Square-Wave Frequency/Periodic Interrupt Rate

| Register A Bits | | | | Square Wave | | Periodic Interrupt | |
|-----------------|-----|-----|-----|-------------|-------|--------------------|-------|
| RS3 | RS2 | RS1 | RS0 | Frequency | Units | Period | Units |
| 0 | 0 | 0 | 0 | None | | None | |
| 0 | 0 | 0 | 1 | 256 | Hz | 3.90625 | ms |
| 0 | 0 | 1 | 0 | 128 | Hz | 7.8125 | ms |
| 0 | 0 | 1 | 1 | 8.192 | kHz | 122.070 | µs |
| 0 | 1 | 0 | 0 | 4.096 | kHz | 244.141 | µs |
| 0 | 1 | 0 | 1 | 2.048 | kHz | 488.281 | µs |
| 0 | 1 | 1 | 0 | 1.024 | kHz | 976.5625 | µs |
| 0 | 1 | 1 | 1 | 512 | Hz | 1.95315 | ms |
| 1 | 0 | 0 | 0 | 256 | Hz | 3.90625 | ms |
| 1 | 0 | 0 | 1 | 128 | Hz | 7.8125 | ms |
| 1 | 0 | 1 | 0 | 64 | Hz | 15.625 | ms |
| 1 | 0 | 1 | 1 | 32 | Hz | 31.25 | ms |
| 1 | 1 | 0 | 0 | 16 | Hz | 62.5 | ms |
| 1 | 1 | 0 | 1 | 8 | Hz | 125 | ms |
| 1 | 1 | 1 | 0 | 4 | Hz | 250 | ms |
| 1 | 1 | 1 | 1 | 2 | Hz | 500 | ms |

Periodic Interrupt

The mux output used to drive the SQW output also drives the interrupt-generation circuitry. If the periodic interrupt event is enabled by writing a 1 to the periodic interrupt enable bit (PIE) in register C, an interrupt request is generated once every 122µs to 500ms. The period between interrupts is selected by the same bits in register A that select the square wave frequency (see Table 3).

Alarm Interrupt

During each update cycle, the RTC compares the hours, minutes, and seconds bytes with the three corresponding alarm bytes. If a match of all bytes is found, the alarm interrupt event flag bit, AF in register C, is set to 1. If the alarm event is enabled, an interrupt request is generated.

An alarm byte may be removed from the comparison by setting it to a “don’t care” state. An alarm byte is set to a “don’t care” state by writing a 1 to each of its two most-significant bits. A “don’t care” state may be used to select the frequency of alarm interrupt events as follows:

- If none of the three alarm bytes is “don’t care,” the frequency is once per day, when hours, minutes, and seconds match.
- If only the hour alarm byte is “don’t care,” the frequency is once per hour, when minutes and seconds match.
- If only the hour and minute alarm bytes are “don’t care,” the frequency is once per minute, when seconds match.
- If the hour, minute, and second alarm bytes are “don’t care,” the frequency is once per second.

Update Cycle Interrupt

The update cycle ended flag bit (UF) in register C is set to a 1 at the end of an update cycle. If the update interrupt enable bit (UIE) of register B is 1, and the update transfer inhibit bit (UTI) in register B is 0, then an interrupt request is generated at the end of each update cycle.

Accessing RTC bytes

Time and calendar bytes read during an update cycle may be in error. Three methods to access the time and calendar bytes without ambiguity are:

- Enable the update interrupt event to generate interrupt requests at the end of the update cycle. The interrupt handler has a maximum of 999ms to access the clock bytes before the next update cycle begins (see Figure 3).
- Poll the update-in-progress bit (UIP) in register A. If UIP = 0, the polling routine has a minimum of t_{BUC} time to access the clock bytes (see Figure 3).
- Use the periodic interrupt event to generate interrupt requests every t_{PI} time, such that UIP = 1 always occurs between the periodic interrupts. The interrupt handler has a minimum of $t_{PI}/2 + t_{BUC}$ time to access the clock bytes (see Figure 3).

Oscillator Control

When power is first applied to the bq3285 and V_{CC} is above V_{PPD} , the internal oscillator and frequency divider are turned on by writing a 010 pattern to bits 4 through 6 of register A. A pattern of 11X turns the oscillator on, but keeps the frequency divider disabled. Any other pattern to these bits keeps the oscillator off.

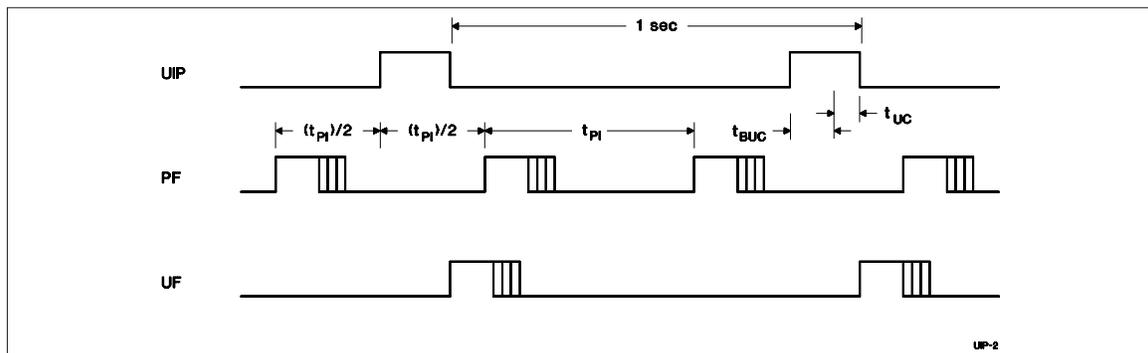


Figure 3. Update-Ended/Periodic Interrupt Relationship

bq3285

Power-Down/Power-Up Cycle

The bq3285 continuously monitors V_{CC} for out-of-tolerance. During a power failure, when V_{CC} falls below V_{PFD} (4.17V typical), the bq3285 write-protects the clock and storage registers. When V_{CC} is below V_{BC} (3V typical), the power source is switched to BC. RTC operation and storage data are sustained by a valid backup energy source. When V_{CC} is above V_{BC} , the power source is V_{CC} . Write-protection continues for t_{CSR} time after V_{CC} rises above V_{PFD} .

Control/Status Registers

The four control/status registers of the bq3285 are accessible regardless of the status of the update cycle (see Table 4).

Register A

| Register A Bits | | | | | | | |
|-----------------|-----|-----|-----|-----|-----|-----|-----|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| UIP | OS2 | OS1 | OS0 | RS3 | RS2 | RS1 | RS0 |

Register A programs:

- The frequency of the square-wave and the periodic event rate.
- Oscillator operation.

Register A provides:

- Status of the update cycle.

RS0–RS3 - Frequency Select

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|---|---|---|-----|-----|-----|-----|
| - | - | - | - | RS3 | RS2 | RS1 | RS0 |

These bits select one of the 13 frequencies for the SQW output and the periodic interrupt rate, as shown in Table 3.

OS0–OS2 - Oscillator Control

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|-----|-----|-----|---|---|---|---|
| - | OS2 | OS1 | OS0 | - | - | - | - |

These three bits control the state of the oscillator and divider stages. A pattern of 010 enables RTC operation by turning on the oscillator and enabling the frequency divider. A pattern of 11X turns the oscillator on, but keeps the frequency divider disabled. When 010 is written, the RTC begins its first update after 500ms.

UIP - Update Cycle Status

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----|---|---|---|---|---|---|---|
| UIP | - | - | - | - | - | - | - |

This read-only bit is set prior to the update cycle. When UIP equals 1, an RTC update cycle may be in progress. UIP is cleared at the end of each update cycle. This bit is also cleared when the update transfer inhibit (UTI) bit in register B is 1.

Table 4. Control/Status Registers

| Reg. | Loc. (Hex) | Read | Write | Bit Name and State on Reset | | | | | | | | | | | | | | | |
|------|------------|------|------------------|-----------------------------|----|-----|----|-----|----|-----|---------|------|----|-----|----|-----|----|-----|----|
| | | | | 7 (MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0 (LSB) | | | | | | | | |
| A | 0A | Yes | Yes ¹ | UIP | na | OS2 | na | OS1 | na | OS0 | na | RS3 | na | RS2 | na | RS1 | na | RS0 | na |
| B | 0B | Yes | Yes | UTI | na | PIE | 0 | AIE | 0 | UIE | 0 | SQWE | 0 | DF | na | HF | na | DSE | na |
| C | 0C | Yes | No | INTF | 0 | PF | 0 | AF | 0 | UF | 0 | - | 0 | - | 0 | - | 0 | - | 0 |
| D | 0D | Yes | No | VRT | na | - | 0 | - | 0 | - | 0 | - | 0 | - | 0 | - | 0 | - | 0 |

- Notes:**
1. Except bit 7.
 2. na = not affected

Register B

| Register B Bits | | | | | | | |
|-----------------|-----|-----|-----|------|----|----|-----|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| UTI | PIE | AIE | UIE | SQWE | DF | HF | DSE |

Register B enables:

- Update cycle transfer operation
- Square-wave output
- Interrupt events
- Daylight saving adjustment

Register B selects:

- Clock and calendar data formats

All bits of register B are read/write.

DSE - Daylight Saving Enable

| | | | | | | | |
|---|---|---|---|---|---|---|-----|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | - | - | - | - | - | DSE |

This bit enables daylight-saving time adjustments when written to 1:

- On the last Sunday in October, the first time the bq3285 increments past 1:59:59 AM, the time falls back to 1:00:00 AM.
- On the first Sunday in April, the time springs forward from 2:00:00 AM to 3:00:00 AM.

HF - Hour Format

| | | | | | | | |
|---|---|---|---|---|---|----|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | - | - | - | - | HF | - |

This bit selects the time-of-day and alarm hour format:

- 1 = 24-hour format
- 0 = 12-hour format

DF - Data Format

| | | | | | | | |
|---|---|---|---|---|----|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | - | - | - | DF | - | - |

This bit selects the numeric format in which the time, alarm, and calendar bytes are represented:

- 1 = Binary
- 0 = BCD

SQWE - Square-Wave Enable

| | | | | | | | |
|---|---|---|---|------|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | - | - | SQWE | - | - | - |

This bit enables the square-wave output:

- 1 = Enabled
- 0 = Disabled and held low

UIE - Update Cycle Interrupt Enable

| | | | | | | | |
|---|---|---|-----|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | - | UIE | - | - | - | - |

This bit enables an interrupt request due to an update ended interrupt event:

- 1 = Enabled
- 0 = Disabled

The UIE bit is automatically cleared when the UTI bit equals 1.

AIE - Alarm Interrupt Enable

This bit enables an interrupt request due to an alarm

| | | | | | | | |
|---|---|-----|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | AIE | - | - | - | - | - |

interrupt event:

- 1 = Enabled
- 0 = Disabled

PIE - Periodic Interrupt Enable

This bit enables an interrupt request due to a periodic

| | | | | | | | |
|---|-----|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | PIE | - | - | - | - | - | - |

interrupt event:

- 1 = Enabled
- 0 = Disabled

bq3285

UTI - Update Transfer Inhibit

| | | | | | | | |
|-----|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| UTI | - | - | - | - | - | - | - |

This bit inhibits the transfer of RTC bytes to the user buffer:

1 = Inhibits transfer and clears UIE

0 = Allows transfer

Register C

| Register C Bits | | | | | | | |
|-----------------|----|----|----|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| INTF | PF | AF | UF | 0 | 0 | 0 | 0 |

Register C is the read-only event status register.

Bits 0–3 - Unused Bits

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | - | - | 0 | 0 | 0 | 0 |

These bits are always set to 0.

UF - Update Event Flag

| | | | | | | | |
|---|---|---|----|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | - | UF | - | - | - | - |

This bit is set to a 1 at the end of the update cycle. Reading register C clears this bit.

AF - Alarm Event Flag

| | | | | | | | |
|---|---|----|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | - | AF | - | - | - | - | - |

This bit is set to a 1 when an alarm event occurs. Reading register C clears this bit.

PF - Periodic Event Flag

| | | | | | | | |
|---|----|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | PF | - | - | - | - | - | - |

This bit is set to a 1 every t_{PI} time, where t_{PI} is the time period selected by the settings of RS0–RS3 in register A. Reading register C clears this bit.

INTF - Interrupt Request Flag

| | | | | | | | |
|------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| INTF | - | - | - | - | - | - | - |

This flag is set to a 1 when any of the following is true:

AIE = 1 and AF = 1

PIE = 1 and PF = 1

UIE = 1 and UF = 1

Reading register C clears this bit.

Register D

| | | | | | | | |
|-----|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| VRT | - | - | - | - | - | - | - |

Register D is the read-only data integrity status register.

Bits 0–6 - Unused Bits

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| - | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

These bits are always set to 0.

VRT - Valid RAM and Time

| Register D Bits | | | | | | | |
|-----------------|---|---|---|---|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| VRT | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

1 = Valid backup energy source

0 = Backup energy source is depleted

When the backup energy source is depleted (VRT = 0), data integrity of the RTC and storage registers is not guaranteed.

Absolute Maximum Ratings

| Symbol | Parameter | Value | Unit | Conditions |
|---------------------|---|-------------|------|--|
| V _{CC} | DC voltage applied on V _{CC} relative to V _{SS} | -0.3 to 7.0 | V | |
| V _T | DC voltage applied on any pin excluding V _{CC} relative to V _{SS} | -0.3 to 7.0 | V | V _T ≤ V _{CC} + 0.3 |
| T _{OPR} | Operating temperature | 0 to +70 | °C | Commercial |
| T _{STG} | Storage temperature | -55 to +125 | °C | |
| T _{BIAS} | Temperature under bias | -40 to +85 | °C | |
| T _{SOLDER} | Soldering temperature | 260 | °C | For 10 seconds |

Note: Permanent device damage may occur if **Absolute Maximum Ratings** are exceeded. Functional operation should be limited to the Recommended DC Operating Conditions detailed in this data sheet. Exposure to conditions beyond the operational limits for extended periods of time may affect device reliability.

Recommended DC Operating Conditions (T_A = T_{OPR})

| Symbol | Parameter | Minimum | Typical | Maximum | Unit |
|-----------------|---------------------|---------|---------|-----------------------|------|
| V _{CC} | Supply voltage | 4.5 | 5.0 | 5.5 | V |
| V _{SS} | Supply voltage | 0 | 0 | 0 | V |
| V _{IL} | Input low voltage | -0.3 | - | 0.8 | V |
| V _{IH} | Input high voltage | 2.2 | - | V _{CC} + 0.3 | V |
| V _{BC} | Backup cell voltage | 2.5 | - | 4.0 | V |

Note: Typical values indicate operation at T_A = 25°C.

bq3285

DC Electrical Characteristics ($T_A = T_{OPR}$, $V_{CC} = 5V \pm 10\%$)

| Symbol | Parameter | Minimum | Typical | Maximum | Unit | Conditions/Notes |
|-------------------|--|---------|-----------------|---------|------|--|
| I _{LI} | Input leakage current | - | - | ± 1 | μA | V _{IN} = V _{SS} to V _{CC} |
| I _{LO} | Output leakage current | - | - | ± 1 | μA | AD ₀ –AD ₇ , \overline{INT} , and SQW in high impedance, V _{OUT} = V _{SS} to V _{CC} |
| V _{OH} | Output high voltage | 2.4 | - | - | V | I _{OH} = -2.0 mA |
| V _{OL} | Output low voltage | - | - | 0.4 | V | I _{OL} = 4.0 mA |
| I _{CC} | Operating supply current | - | 7 | 15 | mA | Min. cycle, duty = 100%, I _{OH} = 0mA, I _{OL} = 0mA |
| V _{SO} | Supply switch-over voltage | - | V _{BC} | - | V | |
| I _{CCB} | Battery operation current | - | 0.3 | 0.5 | μA | V _{BC} = 3V, T _A = 25°C |
| V _{PFD} | Power-fail-detect voltage | 4.0 | 4.17 | 4.35 | V | |
| I _{RCL} | Input current when $\overline{RCL} = V_{SS}$. | - | - | 185 | μA | Internal 30K pull-up |
| I _{MOTH} | Input current when MOT = V _{CC} | - | - | -185 | μA | Internal 30K pull-down |

Notes: Typical values indicate operation at T_A = 25°C, V_{CC} = 5V or V_{BC} = 3V.

Crystal Specifications (DT-26 or Equivalent)



| Symbol | Parameter | Minimum | Typical | Maximum | Unit |
|--------------------------------|------------------------------|---------|---------|---------|--------|
| f ₀ | Oscillation frequency | - | 32.768 | - | kHz |
| C _L | Load capacitance | - | 6 | - | pF |
| T _P | Temperature turnover point | 20 | 25 | 30 | °C |
| k | Parabolic curvature constant | - | - | -0.042 | ppm/°C |
| Q | Quality factor | 40,000 | 70,000 | - | |
| R ₁ | Series resistance | - | - | 45 | KΩ |
| C ₀ | Shunt capacitance | - | 1.1 | 1.8 | pF |
| C ₀ /C ₁ | Capacitance ratio | - | 430 | 600 | |
| D _L | Drive level | - | - | 1 | μW |
| Δf/f ₀ | Aging (first year at 25°C) | - | 1 | - | ppm |

Capacitance ($T_A = 25^\circ\text{C}$, $F = 1\text{MHz}$, $V_{CC} = 5.0\text{V}$)

| Symbol | Parameter | Minimum | Typical | Maximum | Unit | Conditions |
|----------|--------------------------|---------|---------|---------|------|-----------------------|
| C_{LO} | Input/output capacitance | - | - | 7 | pF | $V_{OUT} = 0\text{V}$ |
| C_{IN} | Input capacitance | - | - | 5 | pF | $V_{IN} = 0\text{V}$ |

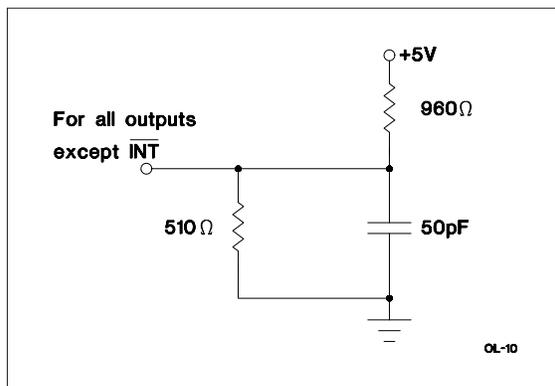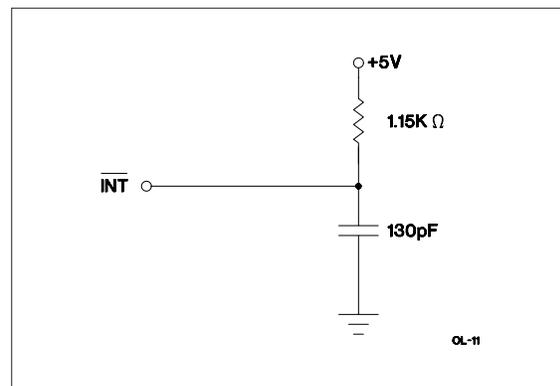AC Test Conditions

| Parameter | Test Conditions |
|--|------------------------------------|
| Input pulse levels | 0 to 3.0 V |
| Input rise and fall times | 5 ns |
| Input and output timing reference levels | 1.5 V (unless otherwise specified) |
| Output load (including scope and jig) | See Figures 4 and 5 |

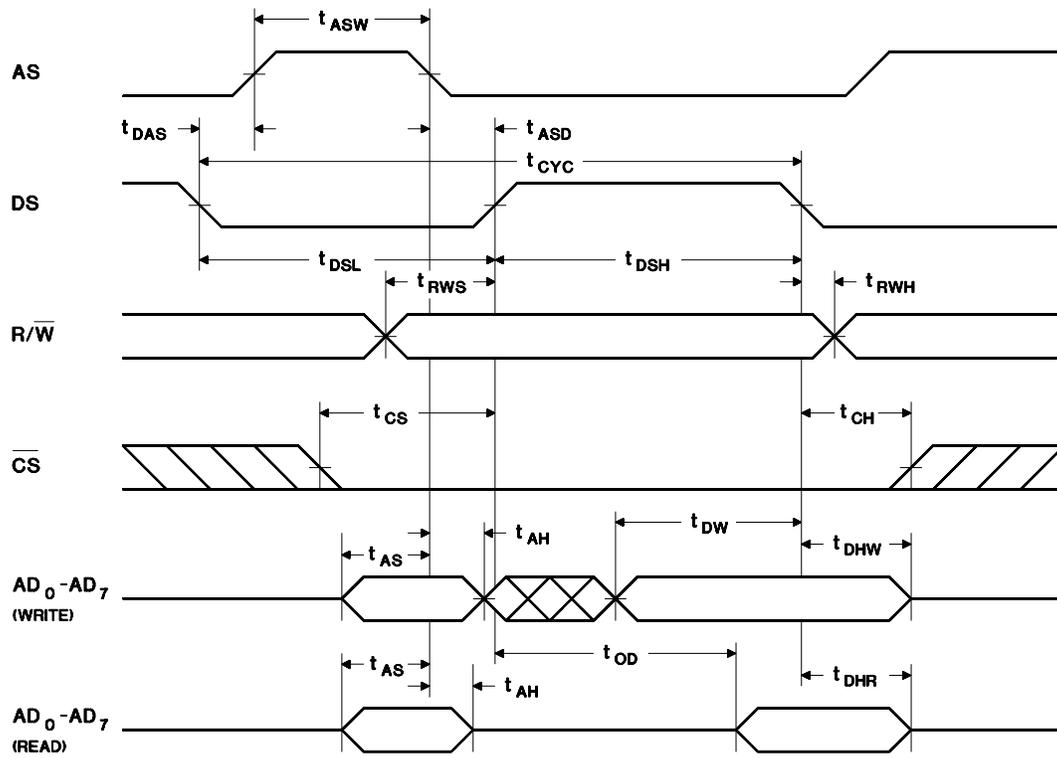

Figure 4. Output Load A

Figure 5. Output Load B

bq3285

Read/Write Timing ($T_A = T_{OPR}$, $V_{CC} = 5V \pm 10\%$)


| Symbol | Parameter | Minimum | Typical | Maximum | Unit | Notes |
|------------------|---|---------|---------|---------|---------|-------------|
| t _{CYC} | Cycle time | 160 | - | - | ns | |
| t _{DSL} | DS low or $\overline{RD}/\overline{WR}$ high time | 80 | - | - | ns | |
| t _{DSH} | DS high or $\overline{RD}/\overline{WR}$ low time | 55 | - | - | ns | |
| t _{RWH} | R/\overline{W} hold time | 0 | - | - | ns | |
| t _{RWS} | R/\overline{W} setup time | 10 | - | - | ns | |
| t _{CS} | Chip select setup time | 5 | - | - | ns | |
| t _{CH} | Chip select hold time | 0 | - | - | ns | |
| t _{DHR} | Read data hold time | 0 | - | 25 | ns | |
| t _{DHW} | Write data hold time | 0 | - | - | ns | |
| t _{AS} | Address setup time | 20 | - | - | ns | |
| t _{AH} | Address hold time | 5 | - | - | ns | |
| t _{DAS} | Delay time, DS to AS rise | 10 | - | - | ns | |
| t _{ASW} | Pulse width, AS high | 30 | - | - | ns | |
| t _{ASD} | Delay time, AS to DS rise ($\overline{RD}/\overline{WR}$ fall) | 35 | - | - | ns | |
| t _{OD} | Output data delay time from DS rise (RD fall) | - | - | 50 | ns | |
| t _{DW} | Write data setup time | 30 | - | - | ns | |
| t _{BUC} | Delay time before update cycle | - | 244 | - | μ s | |
| t _{PI} | Periodic interrupt time interval | - | - | - | - | See Table 3 |
| t _{UC} | Time of update cycle | - | 1 | - | μ s | |

Motorola Bus Read/Write Timing




RC-4

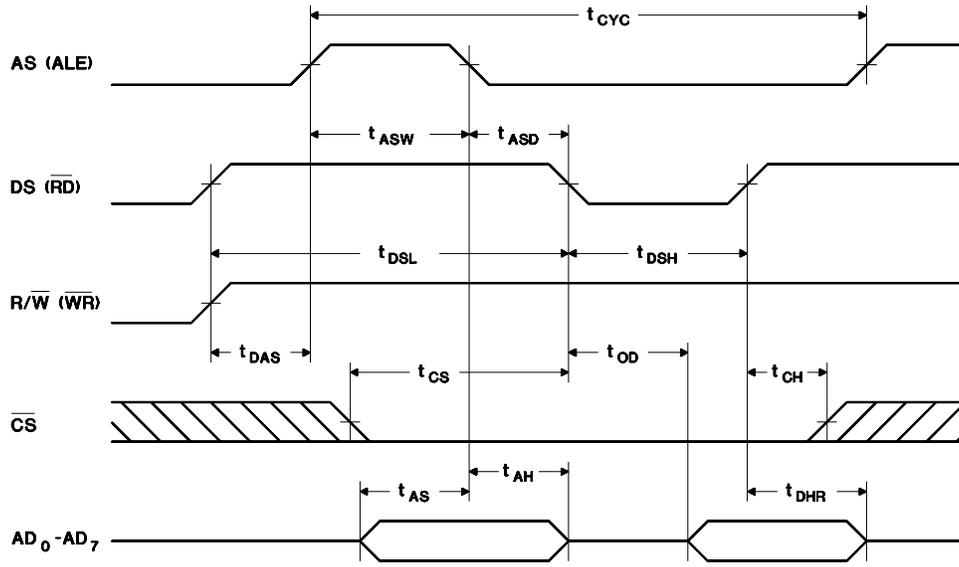Intel Bus Read Timing



RC-5

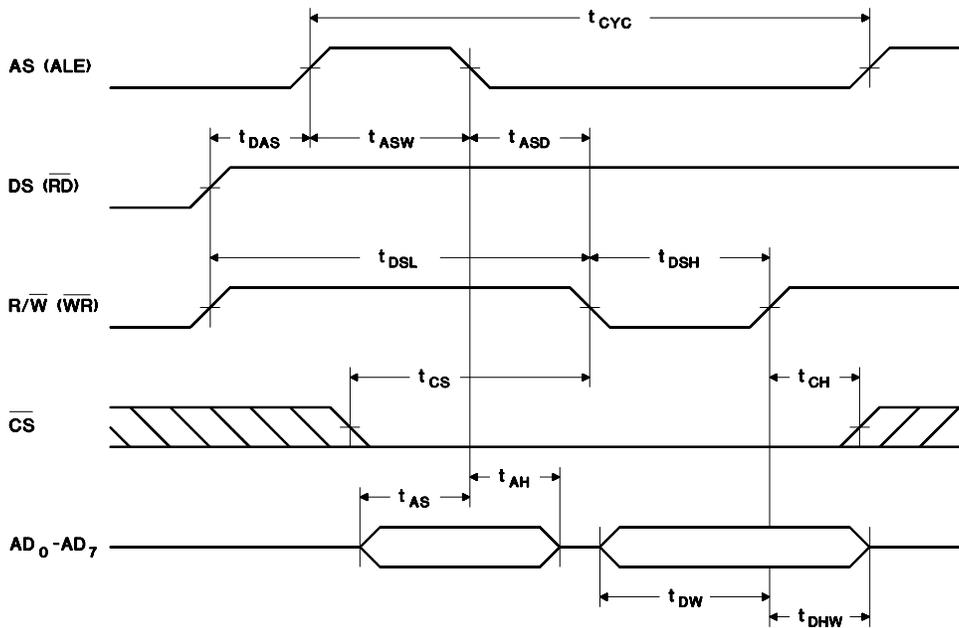Intel Bus Write Timing




WC-5

Jan. 1999 E

Power-Down/Power-Up Timing ($T_A = T_{OPR}$)

| Symbol | Parameter | Minimum | Typical | Maximum | Unit | Conditions |
|-----------|--|---------|---------|---------|---------|---|
| t_F | V_{CC} slew from 4.5V to 0V | 300 | - | - | μs | |
| t_R | V_{CC} slew from 0V to 4.5V | 100 | - | - | μs | |
| t_{CSR} | \overline{CS} at V_{IH} after power-up | 20 | - | 200 | ms | Internal write-protection period after V_{CC} passes V_{PFD} on power-up. |

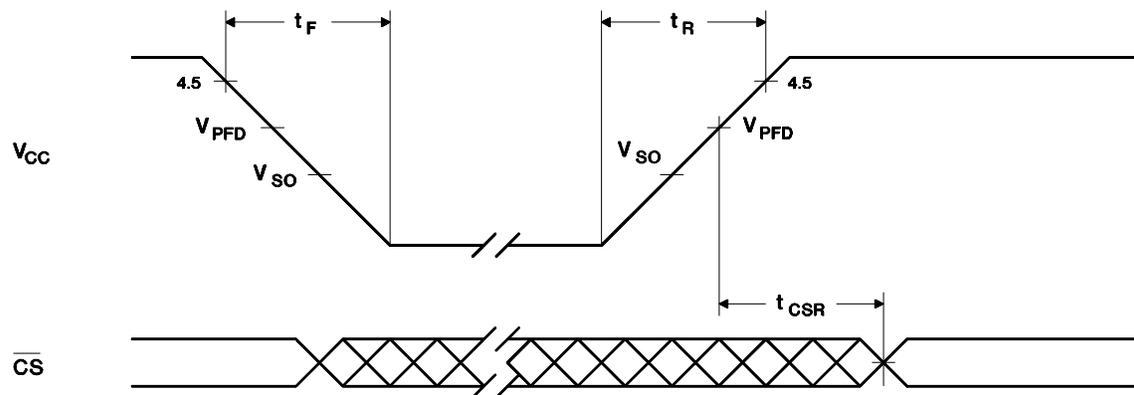Power-Down/Power-Up Timing




PD-4A

bq3285

Interrupt Delay Timing ($T_A = T_{OPR}$)


| Symbol | Parameter | Minimum | Typical | Maximum | Unit |
|-----------|--|---------|---------|---------|---------|
| t_{RSW} | Reset pulse width | 5 | - | - | μs |
| t_{IRR} | \overline{INT} release from \overline{RST} | - | - | 2 | μs |
| t_{IRD} | \overline{INT} release from DS (\overline{RD}) | - | - | 2 | μs |

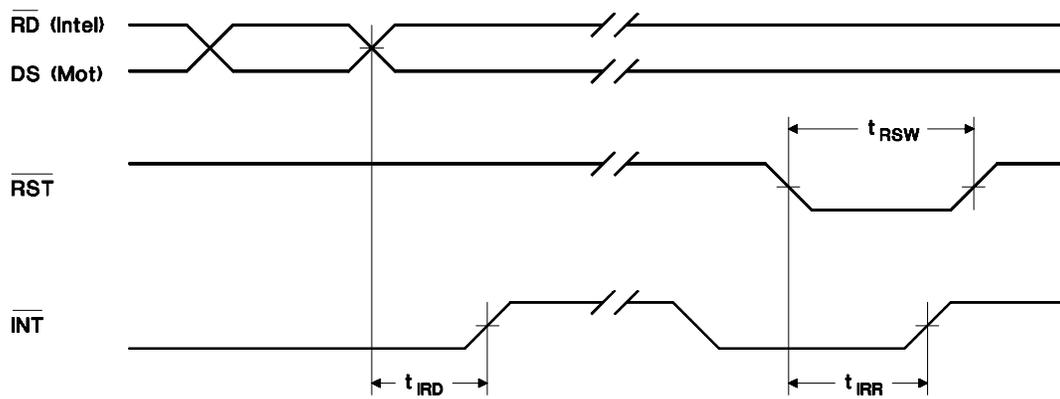Interrupt Delay Timing



INT-1

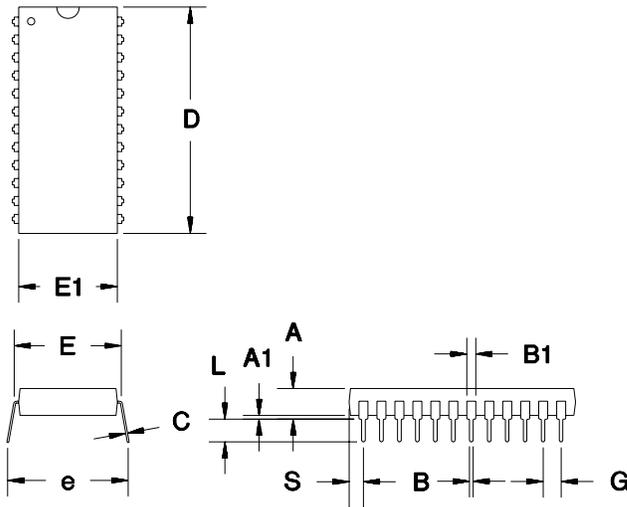24-Pin DIP (P)




24-Pin DIP (P)

| Dimension | Minimum | Maximum |
|-----------|---------|---------|
| A | 0.160 | 0.190 |
| A1 | 0.015 | 0.040 |
| B | 0.015 | 0.022 |
| B1 | 0.045 | 0.065 |
| C | 0.008 | 0.013 |
| D | 1.240 | 1.280 |
| E | 0.600 | 0.625 |
| E1 | 0.530 | 0.570 |
| e | 0.600 | 0.670 |
| G | 0.090 | 0.110 |
| L | 0.115 | 0.150 |
| S | 0.070 | 0.090 |

All dimensions are in inches.

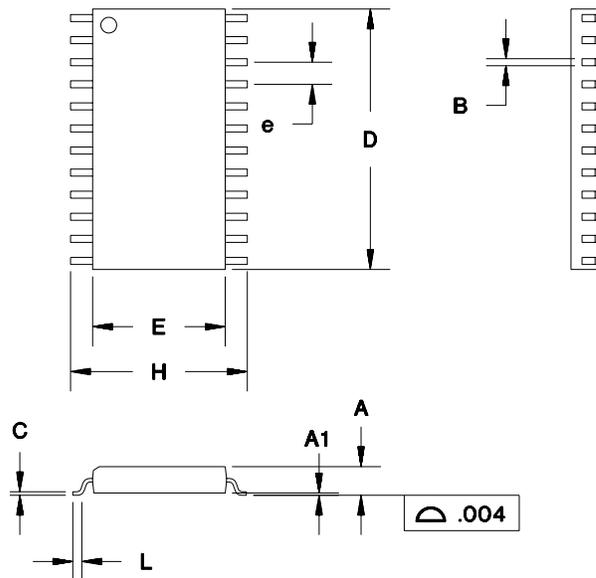24-Pin SOIC (S)




24-Pin SOIC (S)

| Dimension | Minimum | Maximum |
|-----------|---------|---------|
| A | 0.095 | 0.105 |
| A1 | 0.004 | 0.012 |
| B | 0.013 | 0.020 |
| C | 0.008 | 0.013 |
| D | 0.600 | 0.615 |
| E | 0.290 | 0.305 |
| e | 0.045 | 0.055 |
| H | 0.395 | 0.415 |
| L | 0.020 | 0.040 |

All dimensions are in inches.

bq3285

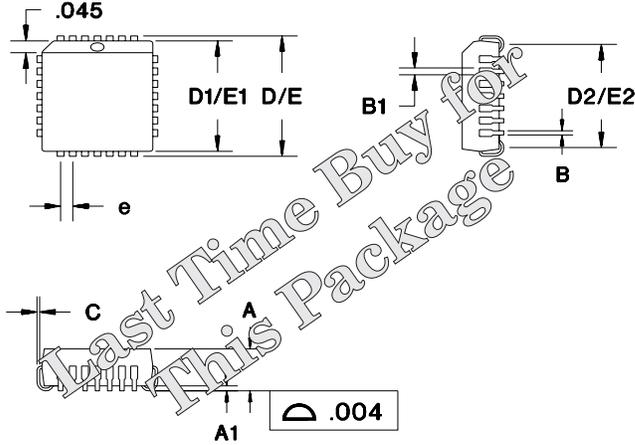28-Pin Quad PLCC (Q)



28-Pin Quad PLCC (Q)

| Dimension | Minimum | Maximum |
|-----------|---------|---------|
| A | 0.165 | 0.180 |
| A1 | 0.020 | - |
| B | 0.012 | 0.021 |
| B1 | 0.025 | 0.033 |
| C | 0.008 | 0.012 |
| D | 0.485 | 0.495 |
| D1 | 0.445 | 0.455 |
| D2 | 0.390 | 0.430 |
| E | 0.485 | 0.495 |
| E1 | 0.445 | 0.455 |
| E2 | 0.390 | 0.430 |
| e | 0.045 | 0.055 |


All dimensions are in inches.

Data Sheet Revision History

| Change No. | Page No. | Description | Nature of Change |
|------------|----------|---|---|
| 1 | 2 | Address strobe input | Clarification |
| 1 | 11 | Backup cell voltage V_{BC} | Was 2.0 min; is 2.5 min |
| 1 | 12 | Power-fail detect voltage V_{PFD} | Was 4.1 min, 4.25 max; is 4.0 min, 4.35 max |
| 2 | 3, 12 | Crystal type Daiwa DT-26 (not DT-26S) | Clarification |
| 3 | 12 | Changed value in first table | I_{RCL} max. was 275; is now 185 |
| 3 | 12 | Changed value in first table | I_{MOTH} max. was -275; is now -185 |
| 3 | 12 | Changed values for conditions of I_{RCL} , I_{MOTH} | Was 20K; is now 30K |
| 4 | 1, 8, 20 | PLCC last time buy and Reg A update | Reg A labeling corrected |

Notes:
 Change 1 = Nov. 1992 B changes from June 1991 A.
 Change 2 = Nov. 1993 C changes from Nov. 1992 B.
 Change 3 = Sept. 1996 D changes from Nov. 1993 C
 Change 4 = Jan. 1999 E changes from Sept. 1996 D

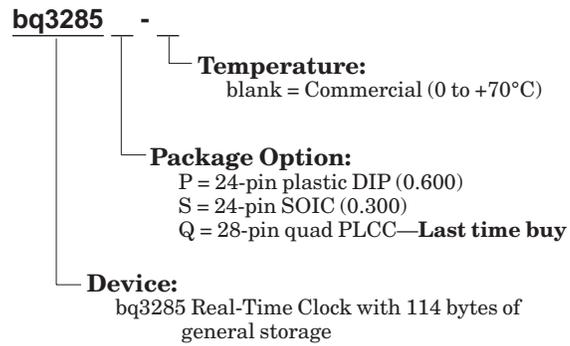Ordering Information



IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.