

Key Parameters

V_{RRM}	=	3800 V
I_{FAVM}	=	790 A
I_{FSM}	=	7.6 kA
V_{F0}	=	1.01 V
r_F	=	0.72 mΩ

Avalanche Rectifier Diode

5SDA 07D3806

Doc. No. 5SYA 1123 - 01 Apr-98

Features


- Optimized for line frequency rectifiers
- Low on-state voltage, narrow V_F -bands for parallel operation
- Self protected against transient overvoltages
- Guaranteed maximum avalanche power dissipation
- Industry standard housing

Blocking

Part number	5SDA 07D3806	5SDA 0763206	Condition
V_{RRM}	3800	3200	$f = 50 \text{ Hz}$ $t_p = 10 \text{ ms}$
V_{RSM}	4180	3520	$t_p = 10 \text{ ms}$ $T_j = 160^\circ\text{C}$
I_{RRM}	$\leq 50 \text{ mA}$		V_{RRM} $T_j = 160^\circ\text{C}$
P_{RSM}	$\leq 70 \text{ kW}$		$t_p = 20 \mu\text{s}$ $T_j = 45^\circ\text{C}$
	$\leq 50 \text{ kW}$		$t_p = 20 \mu\text{s}$ $T_j = 160^\circ\text{C}$

Mechanical data

F_M	Mounting force	min.	10 kN
		max.	12 kN
a	Acceleration		
	Device unclamped		50 m/s ²
	Device clamped		200 m/s ²
m	Weight		0.25 kg
D_S	Surface creepage distance		30 mm
D_a	Air strike distance		20.5 mm

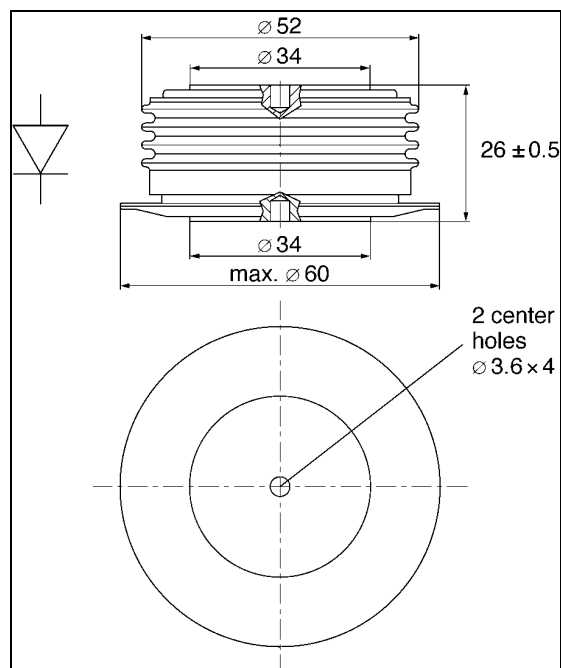

On-state

I _{FAVM}	Max. average on-state current	790 A	Half sine wave, T _C = 85°C			
I _{FRMS}	Max. RMS on-state current	1240 A				
I _{FSM}	Max. peak non-repetitive surge current	7.6 kA	t _p	=	10 ms	T _j = 160°C
		8.2 kA	t _p	=	8.3 ms	After surge:
I ² t	Limiting load integral	290·10 ³ A ² s	t _p	=	10 ms	V _D = V _R = 0V
		280·10 ³ A ² s	t _p	=	8.3 ms	
V _{F0}	Threshold voltage	1.01 V	I _F	=	800 - 2400 A	T _j = 160°C
r _F	Slope resistance	0.72 mΩ				
V _{F min}	On-state voltage	1.70 V	I _F	=	1800 A	T _j = 25°C
V _{F max}	On-state voltage	2.00 V				

Thermal

T_j	Storage and operating junction temperature range	-40...160°C	
R_{thJC}	Thermal resistance junction to case	80 K/kW	Anode side cooled
		80 K/kW	Cathode side cooled
		40 K/kW	Double side cooled
R_{thCH}	Thermal resistance case to heat sink	16 K/kW	Single side cooled
		8 K/kW	Double side cooled

Analytical function for transient thermal impedance:

$$Z_{thJC}(t) = \sum_{i=1}^4 R_i(1 - e^{-t/\tau_i})$$

i	1	2	3	4
$R_{(K/kW)}$	20.95	10.57	7.15	1.33
τ_i (s)	0.396	0.072	0.009	0.0044

For a given case temperature T_c at ambient temperature T_a the maximum on-state current can be calculated as follows:

$$I_{FAVM} = \frac{-V_{F0} + \sqrt{(V_{F0})^2 + 4 \cdot f^2 \cdot r_f \cdot P}}{2 \cdot f^2 \cdot r_f}$$

$$\text{where } P = \frac{T_{J \max} - T_C}{R_{thjc}} \text{ or } P = \frac{T_{J \max} - T_A}{R_{thja}}$$

I_{FAVM} (A)
 $T_{\max}$ (°C)
 R_{thja} (K/kW)

P (W)
 T_c (°C)
 R_{thJC} (K/kW)

V_{F0} (V)
 T_a (°C)
 r_F (Ω)

$f^2 =$ 1 for DC current
2.5 for half-sine wave
3.1 for 120° el., sine
6 for 60° el., sine

