



Siemens Matsushita Components

SAW Components Spectrum Shaping Filter

B2565
70,00 MHz

Data Sheet


Metal package **DIP 16**

Features

- Spectrum shaping filter for digital radio systems
- High performance passband
- Constant group delay
- Hermetically sealed metal package

Terminals


- Gold plated NiFeCo alloy

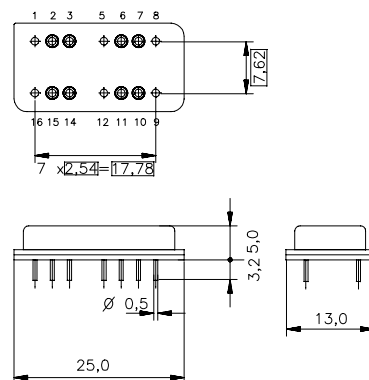

Dimensions in mm, approx. weight 4,2 g

Pin configuration

2	Input - ground
3	Input
10	Output - ground
11	Output
1, 5, 8, 9, 12, 16	Case - ground
6, 7, 14 15	Not connected

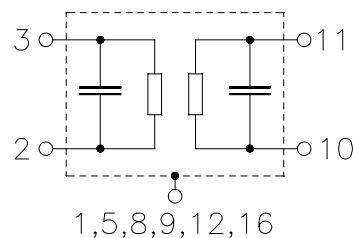

Type	Ordering code	Marking and Package according to	Packing according to
B2565	B39700-B2565-E110	C61157-A7-A11	F61064-V8013-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40/+ 85	°C	
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	15	dBm	source impedance 50 Ω



Siemens Matsushita Components

SAW Components Spectrum Shaping Filter

B2565
70,00 MHz

Data Sheet

Characteristics

Operating temperature: $T = 25 \text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50 \text{ } \Omega$
Terminating load impedance: $Z_L = 50 \text{ } \Omega$
Group delay aperture: $2,5 \text{ MHz}$

		min.	typ.	max.	
Center frequency (center between 6 dB points)	f_C	69,85	70,00	70,15	MHz
Insertion attenuation at f_C	α_C	—	34,0	36,0	dB
Deviation from theoretical frequency resp. ¹⁾	$\Delta\alpha$				
$f_C \dots f_C \pm 0,7 * f_Y$		—	$\pm 0,15$	$\pm 0,2$	dB
$f_C \dots f_C \pm 1,0 * f_Y$		—	$\pm 0,3$	$\pm 0,5$	dB
Phase ripple (p-p)	$\Delta\phi$				
$f_C \dots f_C \pm 1,0 * f_Y$		—	1,0	2,0	$^{\circ}$
Relative attenuation (relative to α_C)	α_{rel}				
10,0 ... 53,5 MHz		37,0	42,0	—	dB
86,5 ... 110,0 MHz		35,0	40,0	—	dB
Reflected wave signal suppression 2,1 μs ... 4,0 μs after main pulse		55,0	60,0	—	dB
Group delay at f_C	τ_C	—	1,31	—	μs
Group delay ripple (p-p)	$\Delta\tau$				
$f_C \dots f_C \pm 1,0 * f_Y$		—	2,0	4,0	ns
Nyquist frequency	f_Y	—	12,3	—	MHz
Roll-off factor	a	—	0,33	—	
Partitioning factor	p	—	0,5	—	
Temperature coefficient of frequency	TC_f	—	- 87	—	ppm/K

1) Theoretical frequency response:

$$H(x) = (S(x)/\text{sinc}(x*\pi/2))^p$$

$$S(x) = \begin{cases} 1 & \text{for } |x| \leq 1-a \\ (1+\cos(\pi \cdot (|x|-1+a)/2a))/2 & \text{for } 1-a < |x| < 1+a \\ 0 & \text{for } 1+a \leq |x| \end{cases}$$

$$x = (f-f_C)/f_Y$$




Siemens Matsushita Components

SAW Components Spectrum Shaping Filter

B2565
70,00 MHz

Data Sheet

Normalized frequency response

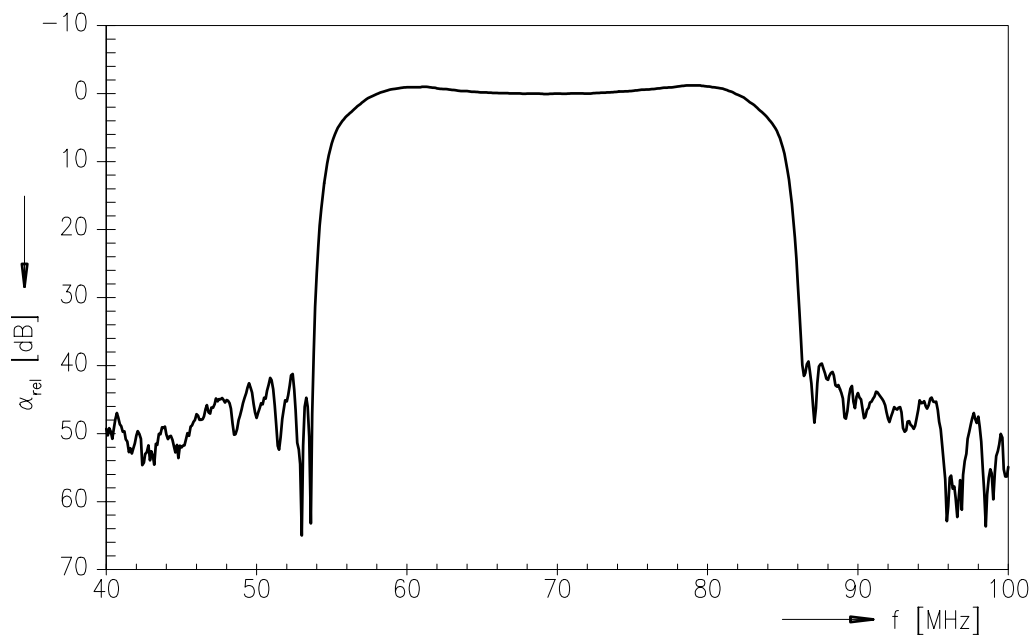

Normalized frequency response

