



SAW Components

Data Sheet B4129

Data Sheet

An abstract, grayscale background graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The overall effect is a high-tech, global communication aesthetic.

EPCOS



SAW Components

B4129

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet




Ceramic package **DCC6C**

Features

- Low-loss RF filter for mobile telephone PCN system, receive path
- High selectivity
- Usable passband: 75 MHz
- No matching network required for operation at 50 Ω
- Ceramic Package for **Surface Mounted Technology (SMT)**

Terminals


- Ni, gold-plated

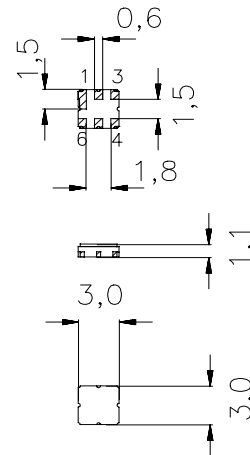

Dimensions in mm, approx. weight 0,037 g

Pin configuration

2	Input
3	Input - ground
5	Output
6	Output - ground
1, 4	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4129	B39182-B4129-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 80	$^{\circ}\text{C}$	source and load impedance 50 Ω peak power of GSM signal, duty cycle 1 : 8 continuous wave continuous wave
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
ESD voltage	V_{ESD}	50	V	
Input power max.				
1710 ... 1785 MHz	P_{IN}	15	dBm	
1805 ... 1880 MHz		10	dBm	
elsewhere		0	dBm	



SAW Components

B4129

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2^\circ \text{C}$
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 50 \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	1805,0 ... 1880,0 MHz		—	3,0	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1805,0 ... 1880,0 MHz		—	1,3	1,8	dB
Input VSWR						
	1805,0 ... 1880,0 MHz		—	2,1	2,4	
Output VSWR						
	1805,0 ... 1880,0 MHz		—	2,1	2,4	
Attenuation	α					
	10,0 ... 800,0 MHz		20,0	21,0	—	dB
	800,0 ... 1500,0 MHz		19,0	20,0	—	dB
	1500,0 ... 1705,0 MHz		20,0	21,0	—	dB
	1705,0 ... 1760,0 MHz		20,0	25,0	—	dB
	1760,0 ... 1785,0 MHz		12,0	22,0	—	dB
	1920,0 ... 1980,0 MHz		20,0	25,0	—	dB
	1980,0 ... 3120,0 MHz		20,0	22,0	—	dB
	3120,0 ... 5000,0 MHz		20,0	25,0	—	dB
	5000,0 ... 6000,0 MHz		10,0	20,0	—	dB



SAW Components

B4129

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = +10$ to $+60^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	1805,0 ... 1880,0 MHz		—	3,2	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1805,0 ... 1880,0 MHz		—	1,5	1,8	dB
Input VSWR						
	1805,0 ... 1880,0 MHz		—	2,1	2,4	
Output VSWR						
	1805,0 ... 1880,0 MHz		—	2,1	2,4	
Attenuation	α					
	10,0 ... 800,0 MHz		20,0	21,0	—	dB
	800,0 ... 1500,0 MHz		19,0	20,0	—	dB
	1500,0 ... 1705,0 MHz		20,0	21,0	—	dB
	1705,0 ... 1760,0 MHz		20,0	25,0	—	dB
	1760,0 ... 1785,0 MHz		10,0	18,0	—	dB
	1920,0 ... 1980,0 MHz		20,0	25,0	—	dB
	1980,0 ... 3120,0 MHz		20,0	22,0	—	dB
	3120,0 ... 5000,0 MHz		20,0	25,0	—	dB
	5000,0 ... 6000,0 MHz		10,0	20,0	—	dB



SAW Components		B4129
Low-Loss Filter for Mobile Communication		1842,5 MHz
Data Sheet		

Characteristics

Operating temperature range:	$T = -10$ to $+80^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\ \Omega$
Terminating load impedance:	$Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	1805,0 ... 1880,0	MHz	—	3,3	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1805,0 ... 1880,0	MHz	—	1,6	1,8	dB
Input VSWR						
	1805,0 ... 1880,0	MHz	—	2,1	2,4	
Output VSWR						
	1805,0 ... 1880,0	MHz	—	2,1	2,4	
Attenuation	α					
	10,0 ... 800,0	MHz	20,0	21,0	—	dB
	800,0 ... 1500,0	MHz	19,0	20,0	—	dB
	1500,0 ... 1705,0	MHz	20,0	21,0	—	dB
	1705,0 ... 1760,0	MHz	20,0	25,0	—	dB
	1760,0 ... 1785,0	MHz	8,0	16,0	—	dB
	1920,0 ... 1980,0	MHz	20,0	25,0	—	dB
	1980,0 ... 3120,0	MHz	20,0	22,0	—	dB
	3120,0 ... 5000,0	MHz	20,0	25,0	—	dB
	5000,0 ... 6000,0	MHz	10,0	20,0	—	dB



SAW Components

B4129

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -20$ to $+80^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	1805,0 ... 1880,0	MHz	—	3,6	3,8	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1805,0 ... 1880,0	MHz	—	1,9	2,1	dB
Input VSWR						
	1805,0 ... 1880,0	MHz	—	2,1	2,4	
Output VSWR						
	1805,0 ... 1880,0	MHz	—	2,1	2,4	
Attenuation	α					
	10,0 ... 800,0	MHz	20,0	21,0	—	dB
	800,0 ... 1500,0	MHz	19,0	20,0	—	dB
	1500,0 ... 1705,0	MHz	20,0	21,0	—	dB
	1705,0 ... 1760,0	MHz	20,0	25,0	—	dB
	1760,0 ... 1785,0	MHz	8,0	16,0	—	dB
	1920,0 ... 1980,0	MHz	20,0	25,0	—	dB
	1980,0 ... 3120,0	MHz	20,0	22,0	—	dB
	3120,0 ... 5000,0	MHz	20,0	25,0	—	dB
	5000,0 ... 6000,0	MHz	10,0	20,0	—	dB



SAW Components

B4129

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30$ to $+80^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1842,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	1805,0 ... 1880,0	MHz	—	3,8	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	1805,0 ... 1880,0	MHz	—	2,1	2,3	dB
Input VSWR						
	1805,0 ... 1880,0	MHz	—	2,1	2,4	
Output VSWR						
	1805,0 ... 1880,0	MHz	—	2,1	2,4	
Attenuation	α					
	10,0 ... 800,0	MHz	20,0	21,0	—	dB
	800,0 ... 1500,0	MHz	19,0	20,0	—	dB
	1500,0 ... 1705,0	MHz	20,0	21,0	—	dB
	1705,0 ... 1760,0	MHz	20,0	25,0	—	dB
	1760,0 ... 1785,0	MHz	8,0	16,0	—	dB
	1920,0 ... 1980,0	MHz	20,0	25,0	—	dB
	1980,0 ... 3120,0	MHz	20,0	22,0	—	dB
	3120,0 ... 5000,0	MHz	20,0	25,0	—	dB
	5000,0 ... 6000,0	MHz	10,0	20,0	—	dB



SAW Components

B4129


Low-Loss Filter for Mobile Communication

1842,5 MHz


Data Sheet



Transfer function (spec for 25°C)

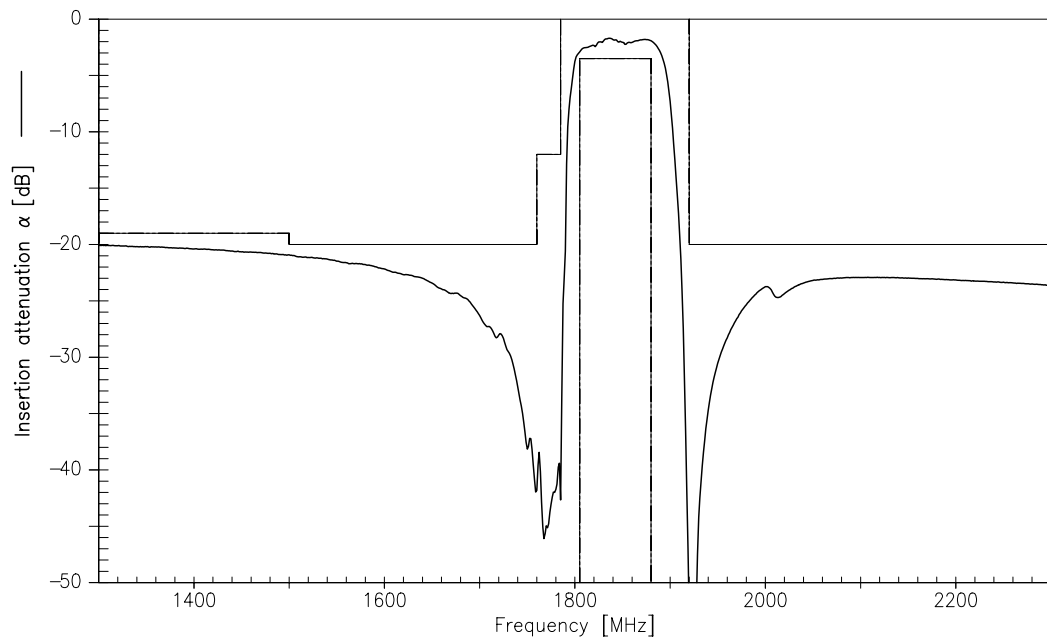

Transfer function (wideband)

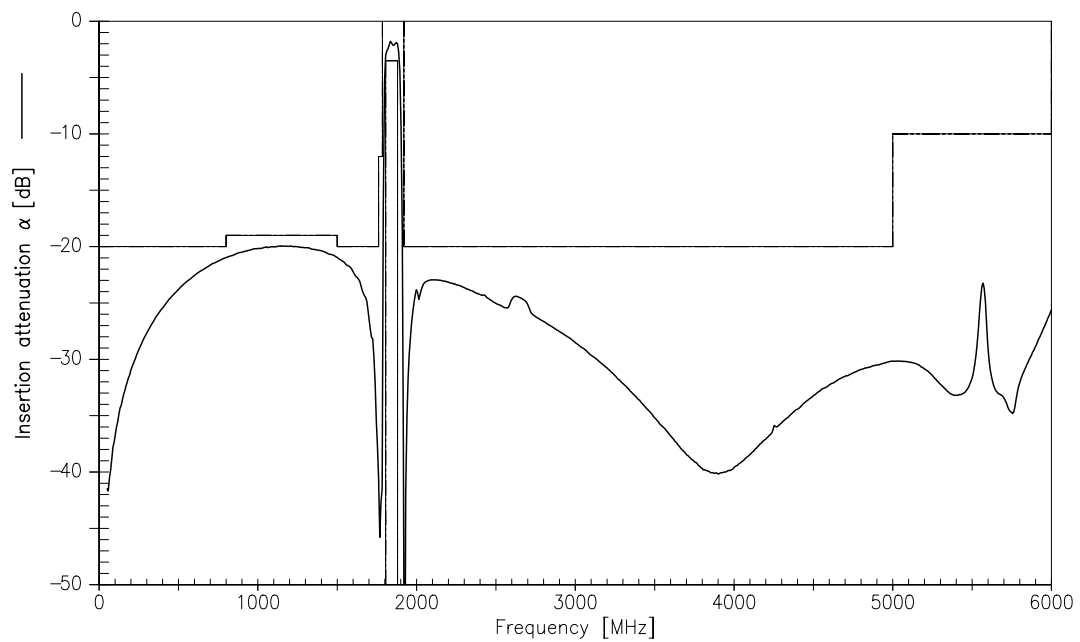



SAW Components	B4129
Low-Loss Filter for Mobile Communication	1842,5 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.