



SAW Components

Data Sheet B4132

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The background is dark and textured with some light streaks and gradients.

EPCOS



SAW Components

B4132

Low-Loss Filter for Mobile Communication

836,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = +25^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	836,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
824,0 ... 849,0 MHz		—	2,7	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
824,0 ... 849,0 MHz		—	1,7	2,0	dB
VSWR					
824,0 ... 849,0 MHz		—	1,78	1,92	
Attenuation	α				
0,0 ... 750,0 MHz		30,0	34,0	—	dB
750,0 ... 800,0 MHz		25,0	31,0	—	dB
869,0 ... 894,0 MHz		40,0	44,0	—	dB
894,0 ... 1004,0 MHz		36,0	40,0	—	dB
1004,0 ... 1030,0 MHz		38,0	40,0	—	dB
1030,0 ... 1209,0 MHz		36,0	39,0	—	dB
1209,0 ... 1700,0 MHz		20,0	30,0	—	dB
1700,0 ... 2200,0 MHz		15,0	22,0	—	dB



SAW Components

B4132

Low-Loss Filter for Mobile Communication

836,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	836,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
824,0 ... 849,0 MHz		—	3,0	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
824,0 ... 849,0 MHz		—	2,0	2,5	dB
VSWR					
824,0 ... 849,0 MHz		—	1,78	1,92	
Attenuation	α				
0,0 ... 750,0 MHz		30,0	34,0	—	dB
750,0 ... 800,0 MHz		25,0	31,0	—	dB
869,0 ... 894,0 MHz		40,0	43,0	—	dB
894,0 ... 1004,0 MHz		36,0	40,0	—	dB
1004,0 ... 1030,0 MHz		38,0	40,0	—	dB
1030,0 ... 1209,0 MHz		36,0	39,0	—	dB
1209,0 ... 1700,0 MHz		20,0	30,0	—	dB
1700,0 ... 2200,0 MHz		15,0	22,0	—	dB



SAW Components

B4132


Low-Loss Filter for Mobile Communication

836,5 MHz


Data Sheet



Transfer function

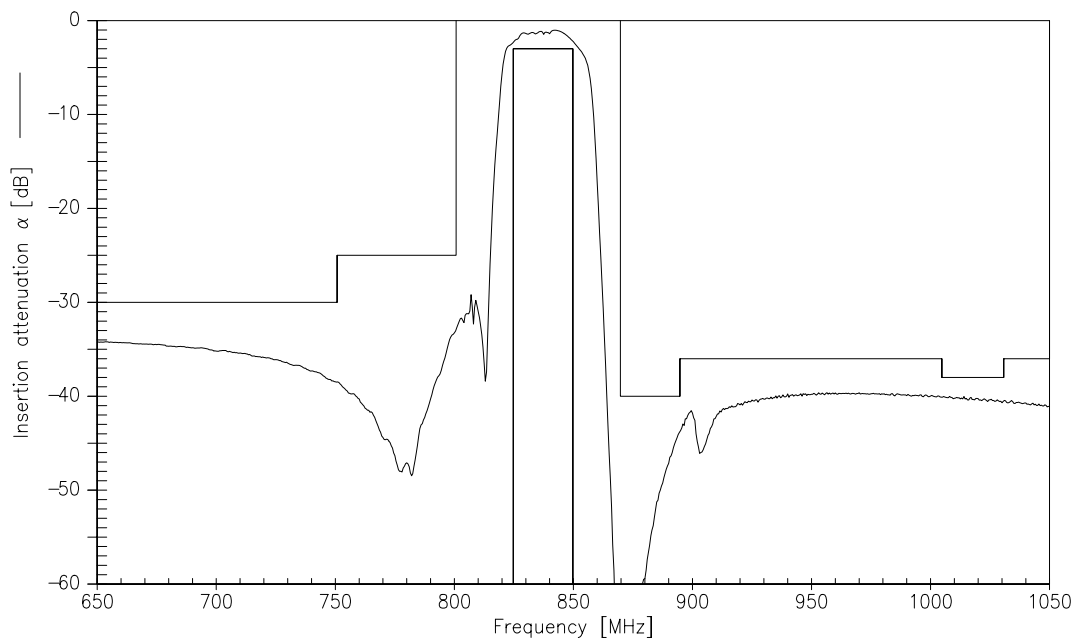

Transfer function (wideband)

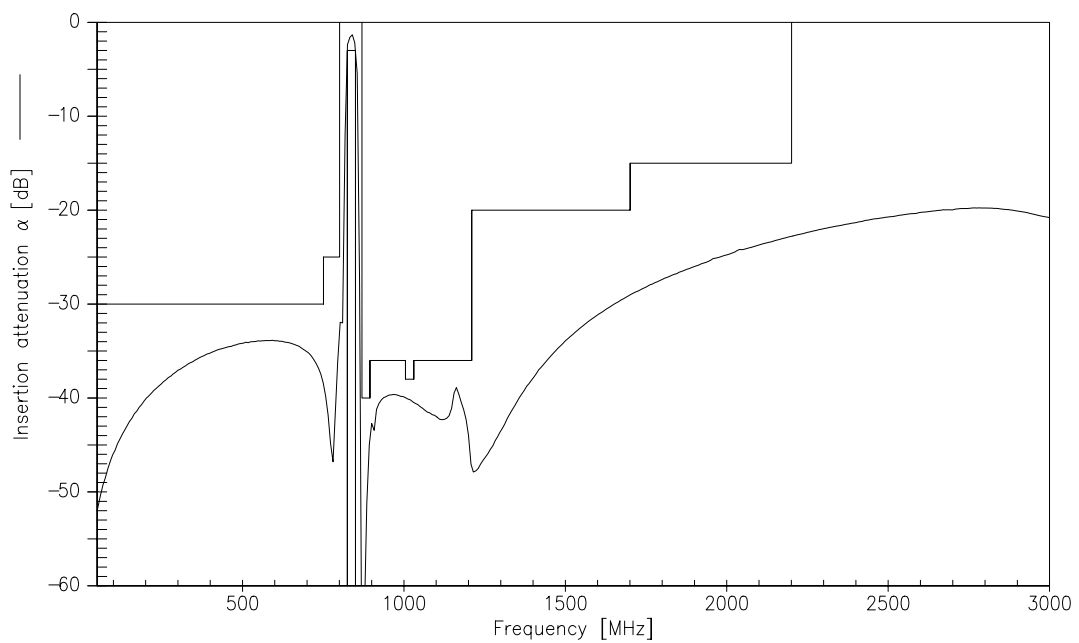



SAW Components

B4132



Low-Loss Filter for Mobile Communication

836,5 MHz

Data Sheet



Reflection functions

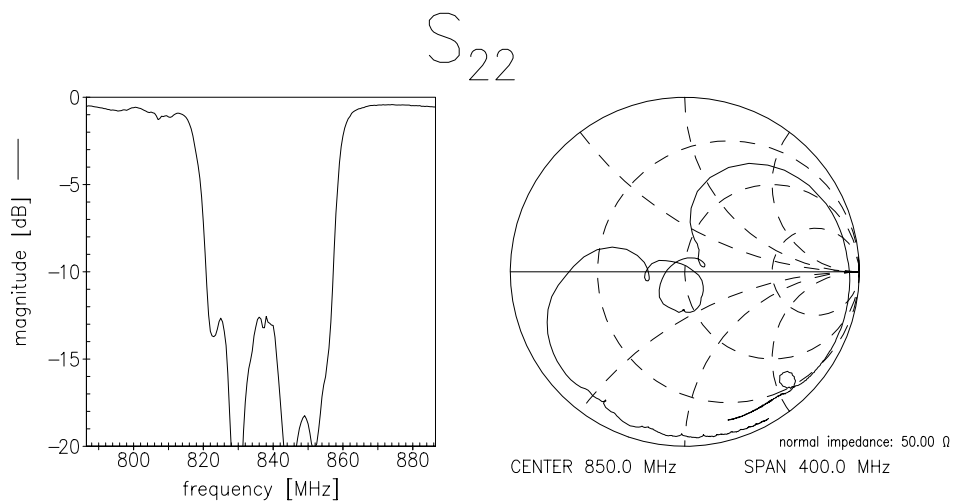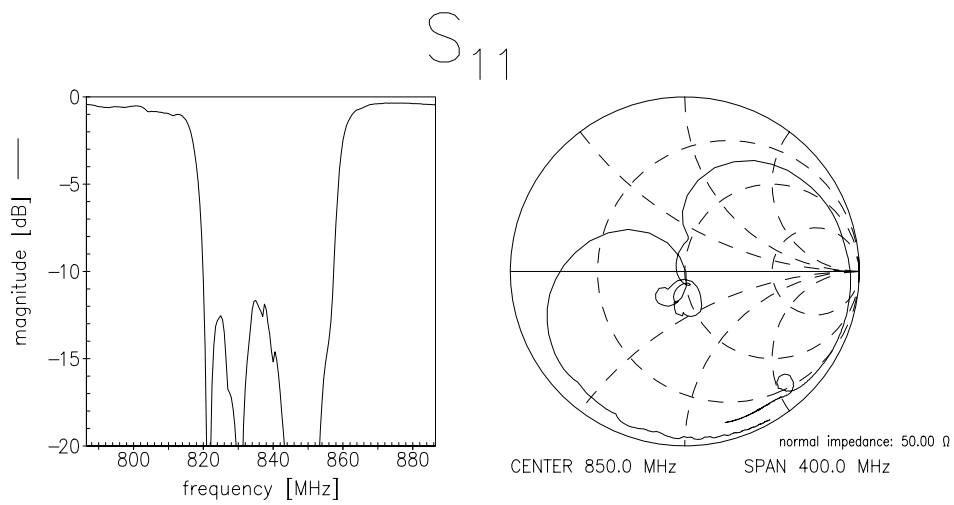



SAW Components	B4132
Low-Loss Filter for Mobile Communication	836,5 MHz
Data Sheet	SMD

Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E MF
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.