


PNP Silicon AF Transistor

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary types: BCP54M...BCP56M(NPN)

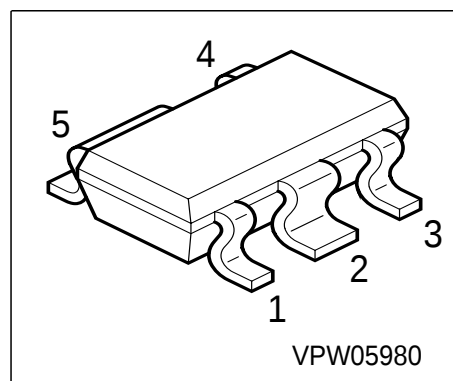

Type	Marking	Pin Configuration					Package
BCP51M	AAs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT595
BCP52M	AEs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT595
BCP53M	AHs	1 = B	2 = C	3 = E	4=n.c.	5 = C	SCT595

Maximum Ratings

Parameter	Symbol	BCP51M	BCP52M	BCP53M	Unit
Collector-emitter voltage	V_{CEO}	45	60	80	V
Collector-base voltage	V_{CBO}	45	60	100	
Emitter-base voltage	V_{EBO}	5	5	5	
DC collector current	I_C	1			A
Peak collector current	I_{CM}	1.5			
Base current	I_B	100			mA
Peak base current	I_{BM}	200			
Total power dissipation, $T_S \leq 77\text{ °C}$	P_{tot}	1.7			W
Junction temperature	T_j	150			°C
Storage temperature	T_{sta}	-65 ... 150			

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤ 43	K/W
--	------------	-----------	-----


¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 10\text{ mA}$, $I_B = 0$	$V_{(BR)CEO}$				V
BCP51M		45	-	-	
BCP52M		60	-	-	
BCP53M		80	-	-	
Collector-base breakdown voltage $I_C = 100\text{ }\mu\text{A}$, $I_E = 0$	$V_{(BR)CBO}$				
BCP51M		45	-	-	
BCP52M		60	-	-	
BCP53M		100	-	-	
Emitter-base breakdown voltage $I_E = 10\text{ }\mu\text{A}$, $I_C = 0$	$V_{(BR)EBO}$	5	-	-	
Collector cutoff current $V_{CB} = 30\text{ V}$, $I_E = 0$	I_{CBO}	-	-	100	nA
Collector cutoff current $V_{CB} = 30\text{ V}$, $I_E = 0$, $T_A = 150\text{ }^\circ\text{C}$	I_{CBO}	-	-	20	μA
DC current gain 1) $I_C = 5\text{ mA}$, $V_{CE} = 2\text{ V}$	h_{FE}	25	-	-	-
DC current gain 1) $I_C = 150\text{ mA}$, $V_{CE} = 2\text{ V}$	h_{FE}	40	-	250	
DC current gain 1) $I_C = 500\text{ mA}$, $V_{CE} = 2\text{ V}$	h_{FE}	25	-	-	
Collector-emitter saturation voltage1)	V_{CEsat}	-	-	0.5	
$I_C = 500\text{ mA}$, $I_B = 50\text{ mA}$					
Base-emitter voltage 1) $I_C = 500\text{ mA}$, $V_{CE} = 2\text{ V}$	$V_{BE(ON)}$	-	-	1	
AC Characteristics					
Transition frequency $I_C = 50\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 100\text{ MHz}$	f_T	-	100	-	MHz


1) Pulse test: $t \leq 300\mu\text{s}$, $D = 2\%$

Total power dissipation $P_{\text{tot}} = f(T_S)$

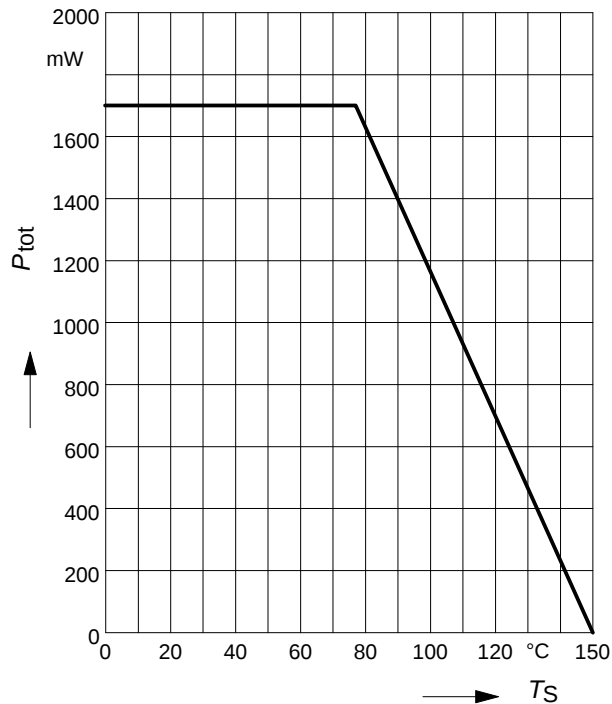


DC current gain $h_{\text{FE}} = f(I_C)$

$V_{\text{CE}} = 2\text{V}$

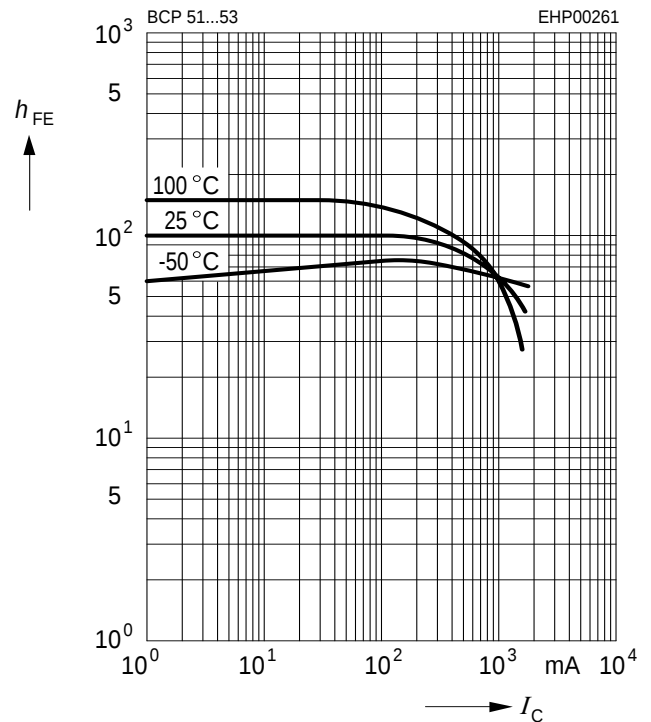


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

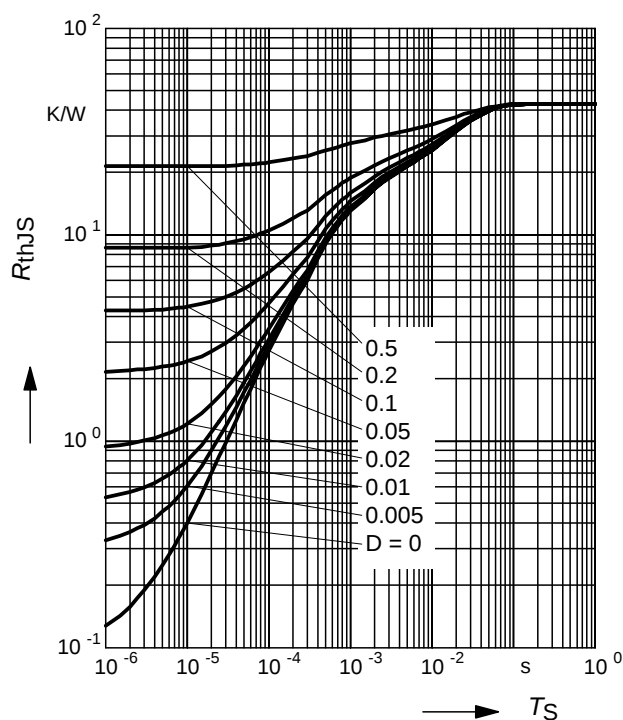


Permissible Pulse Load

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

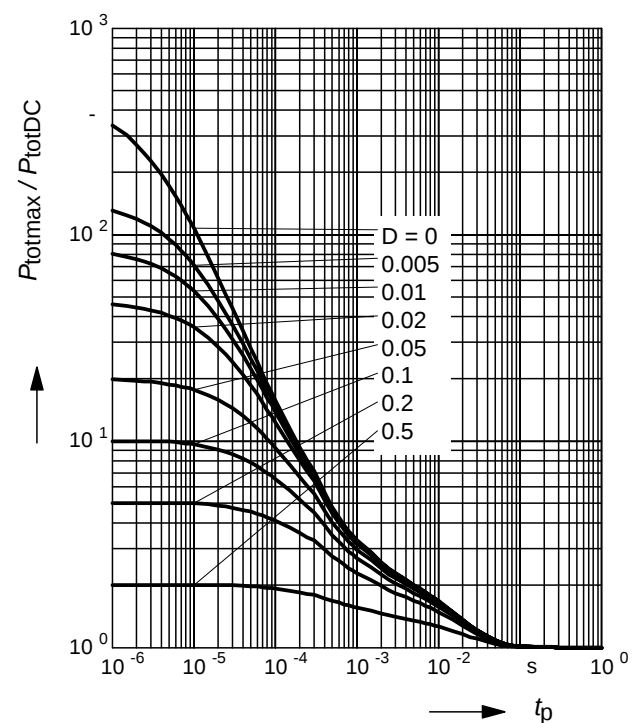


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

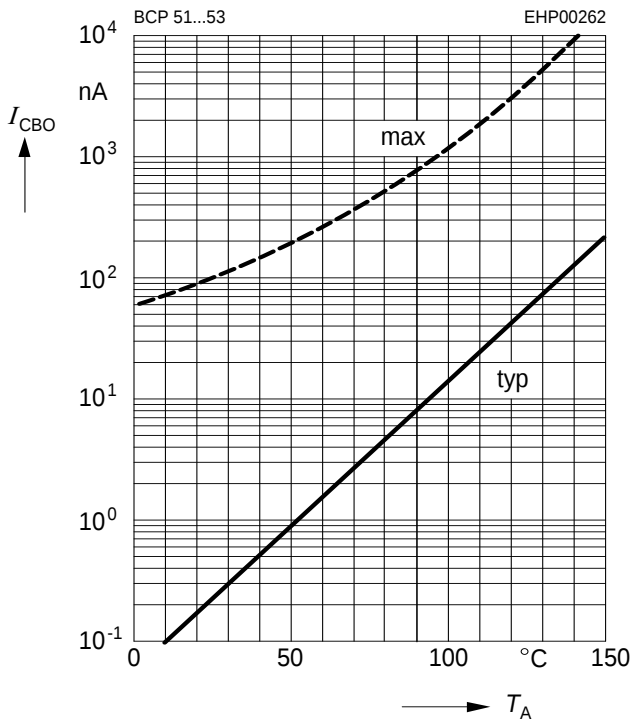


Transition frequency $f_T = f(I_C)$

$V_{CE} = 10V$

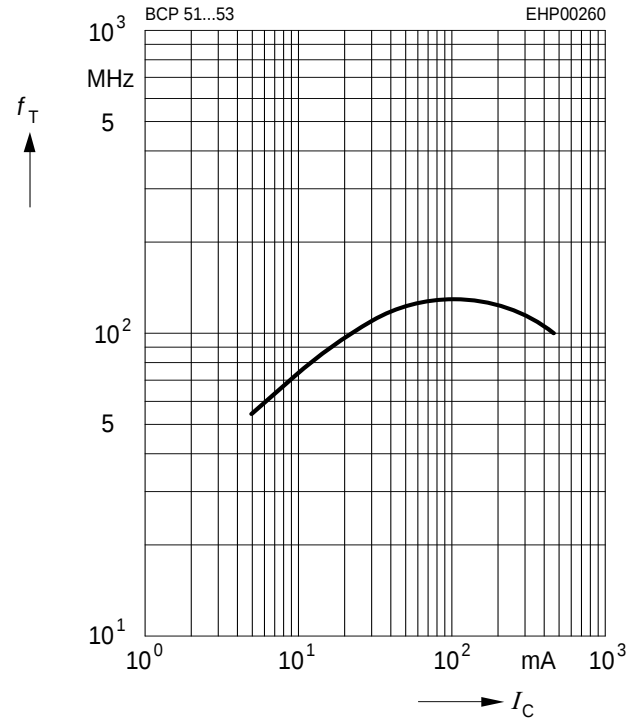

Base-emitter saturation voltage

$I_C = f(V_{BEsat}), h_{FE} = 10$

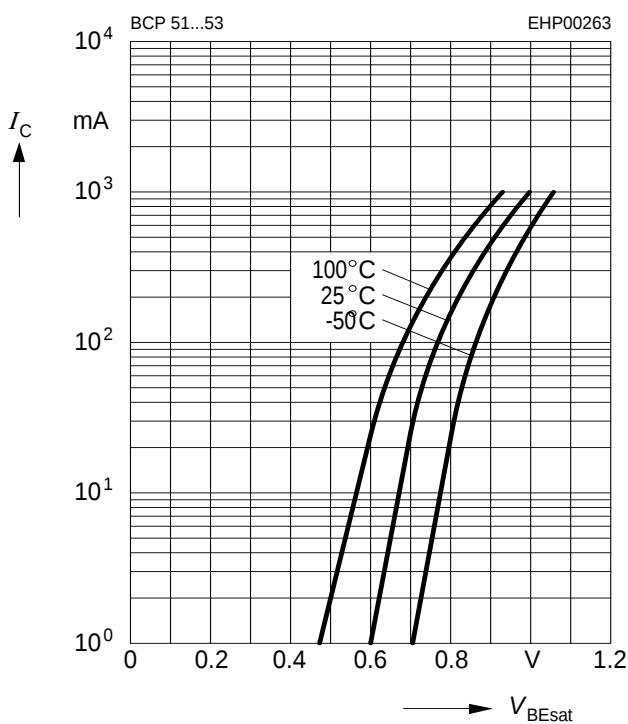

Collector-emitter saturation voltage

$I_C = f(V_{CEsat}), h_{FE} = 10$

