


PNP Silicon High-Voltage Transistors

- Suitable for video output stages in TV sets and switching power supplies
- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary types: BFN36, BFN38 (NPN)

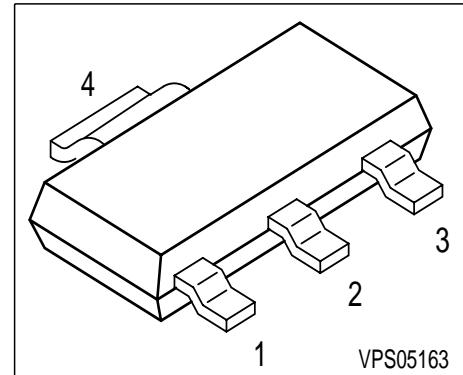

Type	Marking	Pin Configuration				Package
BFN37	BFN 37	1 = B	2 = C	3 = E	4 = C	SOT223
BFN39	BFN 39	1 = B	2 = C	3 = E	4 = C	SOT223

Maximum Ratings

Parameter	Symbol	BFN37	BFN39	Unit	
Collector-emitter voltage	V_{CEO}	250	300	V	
Collector-base voltage	V_{CBO}	250	300		
Emitter-base voltage	V_{EBO}	5	5		
DC collector current	I_C	200		mA	
Peak collector current	I_{CM}	500			
Base current	I_B	100			
Peak base current	I_{BM}	200			
Total power dissipation, $T_S = 124 \text{ }^\circ\text{C}$	P_{tot}	1.5		W	
Junction temperature	T_j	150			
Storage temperature	T_{stg}	-65 ... 150			

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤ 17	K/W
--	------------	-----------	-----

¹For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	250	-	-	V
		300	-	-	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	250	-	-	
		300	-	-	
Emitter-base breakdown voltage $I_E = 100 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
Collector cutoff current $V_{CB} = 200 \text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
$V_{CB} = 250 \text{ V}, I_E = 0$		-	-	100	
Collector cutoff current $V_{CB} = 200 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$	I_{CBO}	-	-	20	μA
$V_{CB} = 250 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$		-	-	-	
Emitter cutoff current $V_{EB} = 4 \text{ V}, I_C = 0$	I_{EBO}	-	-	100	nA
DC current gain 1) $I_C = 1 \text{ mA}, V_{CE} = 10 \text{ V}$	h_{FE}	25	-	-	-
$I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V}$		40	-	-	
$I_C = 30 \text{ mA}, V_{CE} = 10 \text{ V}$		40	-	-	
		30	-	-	
Collector-emitter saturation voltage1) $I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$	V_{CEsat}	-	-	0.4	V
		-	-	0.5	
Base-emitter saturation voltage 1) $I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$	V_{BEsat}	-	-	0.9	

1) Pulse test: $t < 300\mu\text{s}$; $D < 2\%$

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Transition frequency $I_C = 20 \text{ mA}, V_{CE} = 10 \text{ V}, f = 100 \text{ MHz}$	f_T	-	100	-	MHz
Collector-base capacitance $V_{CB} = 300 \text{ V}, f = 1 \text{ MHz}$	C_{cb}	-	2.5	-	pF

Total power dissipation $P_{\text{tot}} = f(T_S)$

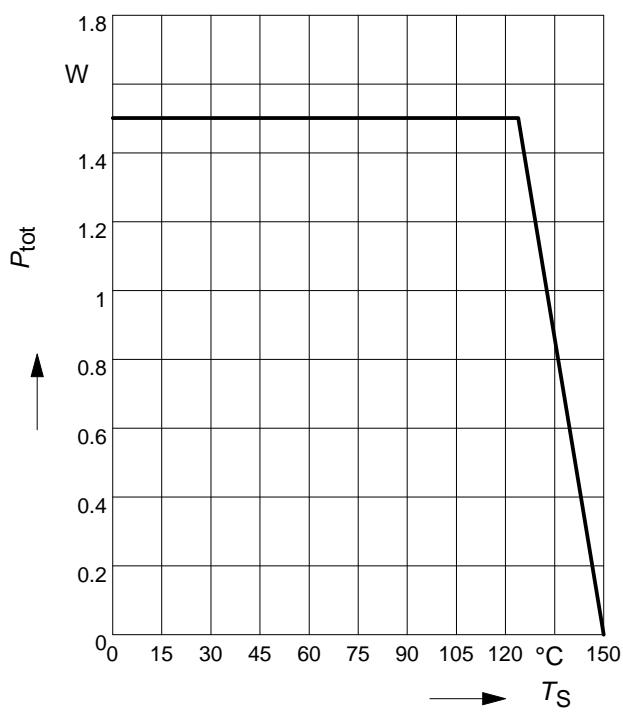


Permissible pulse load

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

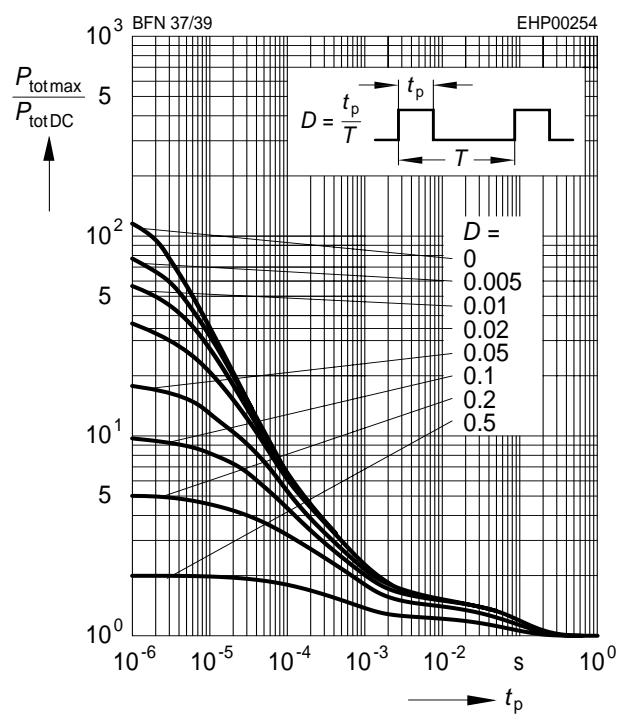


Collector current $I_C = f(V_{BE})$

$V_{CE} = 10\text{V}$

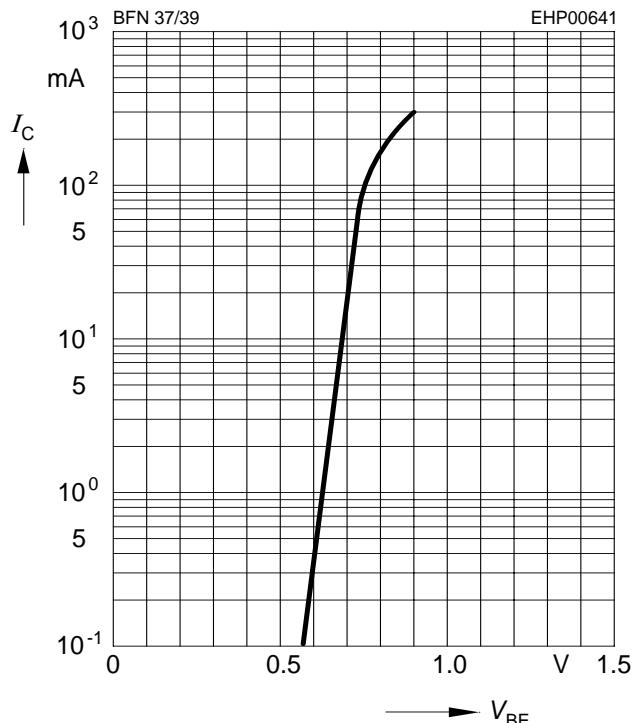


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 200\text{V}$

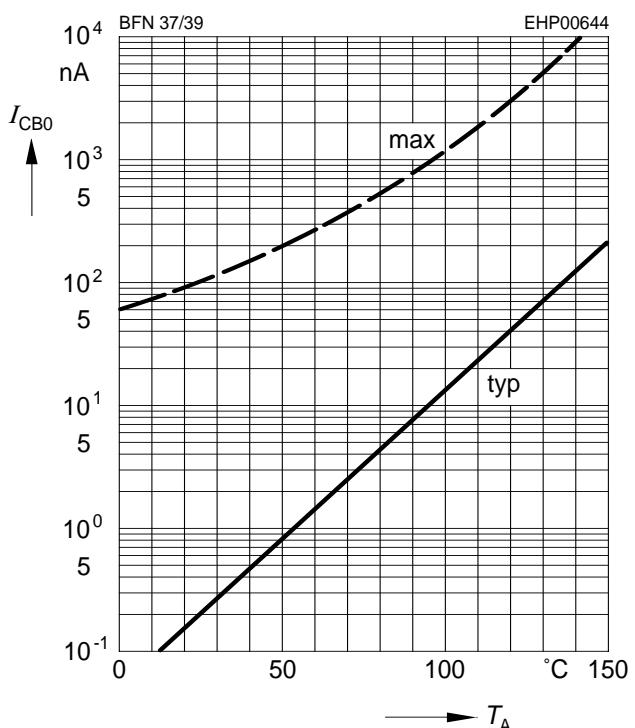

DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 10V$

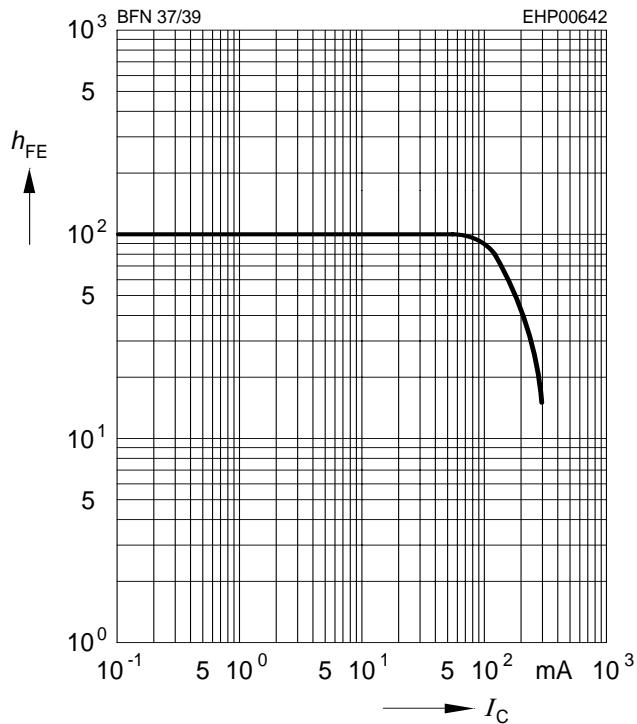

Transition frequency $f_T = f(I_C)$

$V_{CE} = 10V$

