
AC100V input, 20V/80mA output

Absolute Maximum Ratings

Parameter	Symbol	Limits	Unit
Input voltage	Vi	195	V
Output current	lo	80	mApk
ESD endurance	Vsurge	2	kV
Operating temperature range	Topr	−20 ~ +80	°C
Storage temperature range	Tstg	−25 ~ +85	°C

Dimension(Unit : mm)




Electrical Characteristics


Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Input voltage range	Vi	113	141	195	V	DC(80~138VAC)
Output voltage	Vo	18.5	20.0	21.5	V	Vi=141V, Io=50mA
Output current	lo	0	_	80	mA	Vi=141V * 1
Line regulation	Vr	_	0.02	0.3	V	Vi=113~195V, Io=50mA
Load regulation	VI	_	0.05	0.5	V	Vi=141V, Io=0~50mA *2
Output ripple voltage	Vp	_	0.05	0.2	Vp-p	Vi=141V, Io=50mA
Power conversion effciency	η	65	72	_	%	Vi=141V, Io=80mA * 2

- *1 Maximum output current varies depending on ambient temperature; please refer to derating curve.
- * 2 Please refer to Load regulation, Conver


Derating Curve




Switching Frequency



Conversion Efficiency



Application circuit

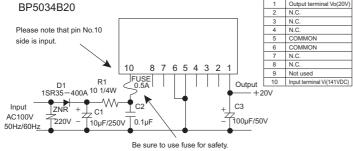

For acutual usage, Please kindly evaluate and confirm our part mounted in your product, Especially, Please make sure to confirm the load current does not exceed Max. rated current by using the current probe.

External components setting


FUSE: Fuse Please make sure to use quick acting fuse 0.5A C1: Capacitor for input Capacitance: 3.3µF~22µF Rated voltage: 200V or higher Ripple current is 0.13Arms above. voltage smoothing C2: For noise terminal Capacitance : $0.1 \mu F \sim 0.22 \mu F$ Rated voltage : 200V or higher Film capacitor or ceramic capacitor. Reduce the noise terminal voltage. voltage reduction The constant value should be evaluated in the set. Capacitance: 100µF~470µF Rated voltage: 50V or higher, C3: Capacitor for Output voltage smooting ESR is 0.39 max. Ripple current is 0.1Arms above. Output noise voltage is influenced. Please evaluate it in the actual set. D1: Rectifier diode

In the absolute maximum ratings, the reverse peak voltage should be 400V or higher, the average rectifying current should be 0.5A or higher, and the forward peak current should be 20A or higher.


(Full-wave rectifier can be used in our part.) 10 ~22 1/4W R1: For noise terminal Reduce the noise terminal voltage. The constant value should be evaluated voltage reduction

ZNR: Varistor Varistor must be used. It protects this part from lightning surge and static

Load Regulation



Surface Temperature Rising



Precautions on Use of ROHM Power Module

Safety Precautions

- 1) The products are designed and produced for application in ordinary electronic equipment (AV equipment, OA equipment, telecommunication equipment, home appliances, amusement equipment etc.). If the products are to be used in devices requiring extremely high reliability (medical equipment, transport equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or operational error may endanger human life and sufficient fail-safe measures, please consult with the Company's sales staff in advance. If product malfunctions may result in serious damage, including that to human life, sufficient fail-safe measures must be taken, including the following:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use in a standard environment and not in any special environments. Application of the products in a special environment can deteriorate product performance. Accordingly, verification and confirmation of product performance, prior to use, is recommended if used under the following conditions:
 - [a] Use in various types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use outdoors where the products are exposed to direct sunlight, or in dusty places
 - [c] Use in places where the products are exposed to sea winds or corrosive gases, including CI2, H2S, NH3, SO2, and NO2
 - [d] Use in places where the products are exposed to static electricity or electromagnetic waves
 - [e] Use in proximity to heat-producing components, plastic cords, or othe flammable items
 - [f] Use involving sealing or coating the products with resin or other coating materials
 - [g] Use involving unclean solder or use of water or water-soluble cleaning agents for cleaning after soldering
 - [h] Use of the products in places subject to dew condensation
- 3) The products are not radiation resistant.
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

Precautions Regarding Application Example and External Circuits

- 1) If change is made to the constant of an external circuit, allow a sufficient margin due to variations of the characteristics of the products and external components, including transient characteristics, as well as static characteristics. Please be informed that the Company has not conducted investigations on whether or not particular changes in the application examples or external circuits would result in the infringement of patent rights of a third party.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.
 - Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

Prohibitions Regarding Industrial Property

- 1) These Specifications contain information related to the Company's industrial property. Any use of them other than pertaining to the usage of appropriate products is not permitted. Duplication of these Specifications and its disclosure to a third party without the Company's permission is prohibited.
- 2) Information and data on products, including application examples, contained in these specifications are simply for reference; the Company does not guarantee any industrial property rights, intellectual property rights, or any other rights of a third party regarding this information or data. Accordingly, the Company does not bear any responsibility for:
 - [a] infringement of the intellectual property rights of a third party
 - [b] any problems incurred by the use of the products listed herein.
- 3) The Company prohibits the purchaser of its products to exercise or use the intellectual property rights, industrial property rights, or any other rights that either belong to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

