



Dialight
564-2210-xxx

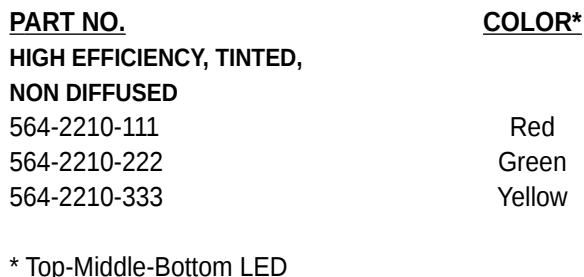

- High efficiency tinted, non-diffused LEDs
- Extended housing eliminates light bleed
- Tri-level design conserves board space
- Narrow viewing angle
- High reliability - life measured in years
- Housing material meets UL 94V-0
- Vibration and shock resistant
- Housing assures proper LED alignment
- Single PC Board insertion 3 LEDs
- Compatible with:
551-xx02 single
553-22xx-100 bi-level
568-221x-xxx quad-level

- Contact factory for information on custom color combinations.

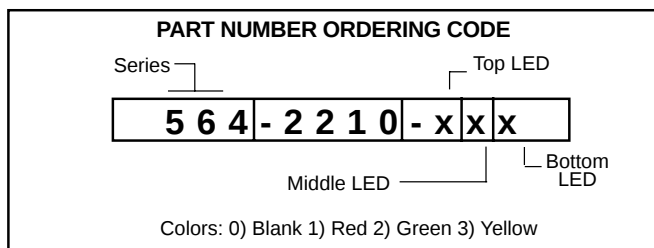

[CLICK HERE](#)

To Construct Custom Color Combinations of This Part

Part Number	Color	Peak Wavelength nm	I _V mcd	V _F Volts	Test Current (mA)	Viewing Angle 2Θ°	LED Data sheet	Page #
564-2210-111	Red	635	12	2.2	10	45°	521-9432	4-56
564-2210-222	Green	565	12	2.3	10	45°	521-9430	4-56
564-2210-333	Yellow	583	12	2.2	10	45°	521-9431	4-56