



Inductive sensor

Bi5-Q08-AP6X2-V2131



- rectangular, height 8 mm
- top active face
- metal, GD-Zn
- 3-wire DC, 10...30 VDC
- normally open pnp output
- connector, M8 x 1

Wiring diagram

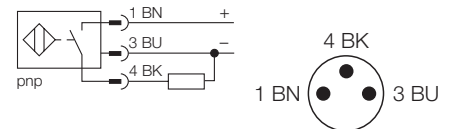

Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Type	Bi5-Q08-AP6X2-V2131
Ident-No.	1600502
Rated operating distance Sn	5 mm
Mounting mode	flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Operating temperature	-25 ...+ 70 °C
Rated operational voltage (DC) U_B	10... 30 VDC
Max. ripple	≤ 10 % U _{pp}
Rated operational current (DC) I _e	≤ 200 mA
No-load current I ₀	≤ 15 mA
Max. OFF-state current	≤ 0,1 mA
Max. switching frequency	≤ 1 kHz
Rated insulation voltage	≤ 0,5 kV
Output function	3-wire, normally open, PNP
Short-circuit protection	yes, cyclic
Max. voltage drop at I _e	≤ 1,8 V
Wire breakage / reverse polarity protection	yes / complete
Housing style	rectangular; Q08
Dimensions	32 x 20 x 8 mm
Housing material	metal, GD-Zn
Active face	plastic, PA12-GF30
Wiring	connector, M8 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Supply voltage indication	LED green
Switching status indication	LED yellow

Inductive sensor

Bi5-Q08-AP6X2-V2131

Mounting instructions

	minimum gap
Gap D	2 x B
Gap W	3 x Sn
Gap S	1 x B
Gap G	6 x Sn

Width of active face B20 mm

