


M67723H

276-284MHz, 7.2V, 1.5W, FM PORTABLE RADIO


OUTLINE DRAWING

Dimensions in mm

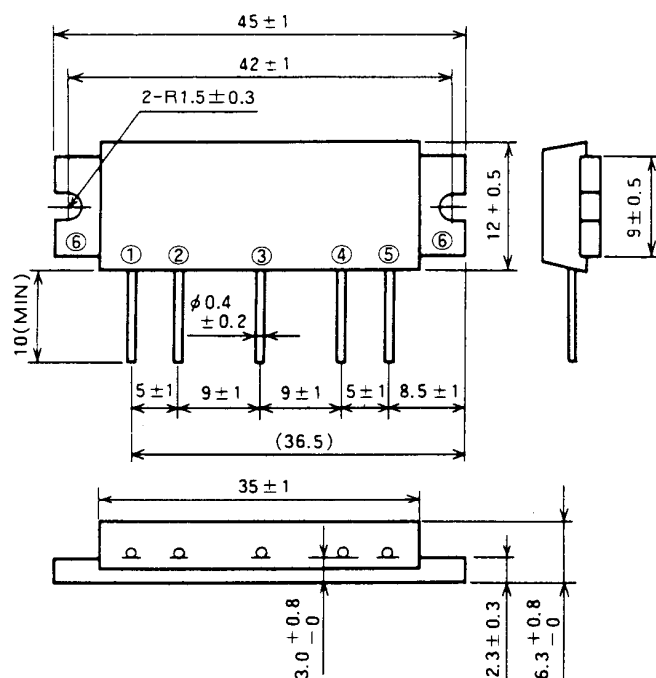

H13

BLOCK DIAGRAM



PIN :

- ① Pin : RF INPUT
- ② Vcc1 : 1st. DC SUPPLY
- ③ VBB : BASE BIAS SUPPLY
- ④ Vcc2 : 2nd. DC SUPPLY
- ⑤ Po : RF OUTPUT
- ⑥ GND : FIN

ABSOLUTE MAXIMUM RATINGS (T_c = 25 °C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CC}	Supply voltage	V _{BB} = 5V, Z _G = Z _L = 50 Ω	16	V
V _{BB}	Base bias	V _{CC1} ≤ 12.5V, Z _G = Z _L = 50 Ω	5.5	V
I _{CC}	Total current	Z _G = Z _L = 50 Ω	4	A
P _{in(max)}	Input power	V _{CC1} ≤ 12.5V, Z _G = Z _L = 50 Ω	60	mW
P _{O(max)}	Output power	V _{CC1} ≤ 12.5V, Z _G = Z _L = 50 Ω	10	W
T _{C(OP)}	Operation case temperature	Z _G = Z _L = 50 Ω	- 30 to 100	°C
T _{stg}	Storage temperature		- 40 to 110	°C

Note. Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range	$V_{CC1} = V_{CC2} = 7.2V$ $V_{BB} = 5V$ $P_{in} = 40mW$ $Z_G = Z_L = 50 \Omega$	276	284	MHz
P _o	Output power		1.5		W
η_T	Total efficiency		40		%
2f _o	2nd. harmonic			- 20	dBc
3f _o	3rd. harmonic			- 30	dBc
ρ_{in}	Input VSWR			2.5	-
-	Load VSWR tolerance	$V_{CC1} = V_{CC2} = 13.2V$, $V_{BB} = 5V$ $P_o = 1.5W$ (P_{in} : controlled) Load VSWR $\geq 20:1$ (All phase) $Z_G = 50\Omega$	No degradation or destroy		-

Note. Above parameters, ratings, limits and conditions are subject to change.