



DTR-2488-SM2

OC-48/STM-16 Single Mode Transceiver



Features

- ☑ Full Compliance with OC-48/STM-16 SONET/SDH Specifications
- ☑ Intermediate Reach & Short Reach
- ☑ Eye Safe (Class I Laser Safety)
- ☑ Multi-sourced 2x9 package style
- ☑ Duplex SC or ST or FC connector
- ☑ Differential Laser Facet & Bias Monitors
- ☑ 0°C to +70°C Operating Temperature
- ☑ Single +5 V supply
- ☑ Wave Solder Process Compatible

Description

The DTR-2488-SM2 fiber optic transceivers offer a simple, convenient way to interface ATM/SONET/SDH OC-48/STM-16 PCBs to single mode fiber optic cables for both Short and Intermediate Reach applications. They are fully compliant to all applicable SONET/SDH specifications. The Short Reach version uses a 1300 nm Fabry Perot Laser while the Intermediate Reach version uses a 1300 nm DFB Laser. All modules satisfy Class I Laser Safety requirements in accordance with the US FDA/CDRH and international IEC-825 standards.

The transmit and receive functions are contained in a two-row, 18-pin (2x9) package with a Duplex SC or ST or FC connector interface. The transmitter incorporates all the

necessary control and driver circuit for converting differential data to light. A Transmitter Disable input and differential Laser Facet and Bias Monitor outputs are provided. The receiver uses an InGaAs/InP PIN photodiode to convert the light signal into an electrical current which is amplified and regenerated into differential data outputs. A Signal Detect function which indicates loss of optical input is also provided.

The transceiver operates from a single +5V power supply over an operating temperature range of 0°C to +70°C. The transceiver package is made of either *conductive* plastic (Duplex-SC version) or metal (FC and ST version) for good EMI shielding.

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	T_{st}	- 40	+ 85	°C
Operating Temperature	T_{op}	0	+ 70	°C
Supply Voltage	V_{cc}	0	+ 6.0	V
Lead Soldering Temperature & Time	-	-	260°C, 10 sec	

DTR-2488-SM2

Transmitter Performance Characteristics (over Operating Case Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	0.1	2.488	3.0	Gb/s
Average Optical Output Power (50% duty cycle)	L1	P_o	- 10.0	- 7.0	- 3.0	dBm
	L0		- 5.0	- 3.0	0	
Extinction Ratio		P_{hi}/P_{lo}	8.2	-	-	dB
Center Wavelength	SR (Short Reach)	λ_c	1266	1310	1360	nm
	IR1 (Intermediate Reach 1310 nm)		1266	1310	1360	
Spectral Width (RMS)	SR (Short Reach)	$\Delta\lambda_{RMS}$	-	-	4.0	nm
Spectral Width (-20 dB)	IR1 (Intermediate Reach 1310 nm)	$\Delta\lambda_{20}$	-	-	1.0	
Side Mode Suppression Ratio	IR1 (Intermed Rch 1310 nm)	$SMSR$	30	-	-	dB
Optical Output Eye		compliant with Bellcore TR-NWT-000253 and ITU-T Recommendation G.957				

Receiver Performance Characteristics (over Operating Case Temperature Range)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Data Rate		B	0.1	2.488	3.0	Gb/s
Receiver Sensitivity (10^{-10} BER) ¹		P_{min}	- 19.0	- 22.0	-	dBm
Maximum Input Optical Power (10^{-10} BER) ¹	SR (Short Reach)	P_{max}	- 3.0	- 1.0	-	dBm
	IR (Intermediate Reach)		0	2.0	-	
Signal Detect Thresholds	Increasing Light Input	P_{sd+}	-	-	- 19.0	dBm
	Decreasing Light Input	P_{sd-}	- 35.0	-	-	
Signal Detect Hysteresis		-	-	0.5	-	dB
Wavelength of Operation		λ	1100	-	1600	nm
¹ Specified in Average Optical Input Power and measured at 2.488 Gb/s and 1300 nm wavelength with $2^{23}-1$ PRBS.						

Transmitter Electrical Interface

Parameter	Symbol	Minimum	Typical	Maximum	Units
Supply Voltage	V_{CC}	4.75	5.0	5.25	V
Supply Current	I	-	150	200	mA
Input Voltage (between DATA+ & DATA -)	V_{IN}	0.25	0.80	1.00	Vp-p
Transmitter Disable Voltage	V_{DIS}	$V_{CC} - 2.0$	-	V_{CC}	V
Transmitter Enable Voltage	V_{EN}	0	-	0.6	V
Differential Bias Monitor Voltage	at 25°C	-	100	200	mV
	at 70°C	-	300	500	
Differential Back Facet Monitor Voltage	$V_{FM,DIF}$	15	150	325	mV

Receiver Electrical Interface

Parameter	Symbol	Minimum	Typical	Maximum	Units
Supply Voltage	V_{CC}	4.75	5.0	5.25	V
Supply Current	I	-	155	195	mA
Output Voltage Swing (DATA)	V_{PP}	0.4	0.5	0.8	V
Output HIGH Voltage (SIGNAL DETECT)	V_{OH}	2.7	-	V_{CC}	V
Output LOW Voltage (SIGNAL DETECT)	V_{OL}	0	-	0.7	V

DTR-2488-SM2

Application Notes

Transmitter: When the DATA+ input is at logic HIGH and DATA- input is at logic LOW (DATA+ voltage is higher than DATA- voltage by 0.25 V), the LD is ON; and vice versa. The transmitter is normally enabled (i.e. when the TX DISABLE control input is not connected). When the TX DISABLE input voltage is higher than $V_{CC} - 2$ V, the laser is disabled (less than -30dBm output power) independent of the input data.

The transmitter incorporates an Average Power Control (APC) loop to stabilize the transmitter average optical output power against temperature variation. The APC loop always acts to keep the transmitter average optical output power at a constant value (when the transmitter is enabled). Therefore, when the input data is all continuous “zeroes” or all continuous “ones”, the transmitter optical output power is a constant level equal to the nominal average optical output power (not at the “OFF” level or at the “ON” level).

Receiver: The Signal Detect circuit monitors the level of the incoming optical signal and generates a TTL logic LOW signal at the SIGNAL DETECT output when insufficient photocurrent is produced.

Interface circuit: The power supply line should be well-filtered. All 0.01 μ F power supply bypass capacitors should be as close to the DTR-2488-SM2 transceiver module as possible. The two front GND posts should be grounded to Circuit Ground or Chassis Ground.



The transmitter input stage has internal 50 ohm termination. The DATA input interface is via AC coupling as shown. In single-ended applications, the unused DATA input pin should be bypassed to AC Ground.

The DATA outputs are differential signals designed to be AC-coupled into 50 ohm load. No termination resistor is required for the SIGNAL DETECT


output. The load impedance of the SIGNAL DETECT output should be 10 Kohm or more.

Transmission lines with 50 ohm characteristic impedance are recommended for all DATA interface lines to obtain best performance. The use of both differential inputs and outputs are strongly recommended. If single-ended output is used, the other unused output should be properly terminated into 50 ohm load.

Laser Bias & Facet Monitor Circuits

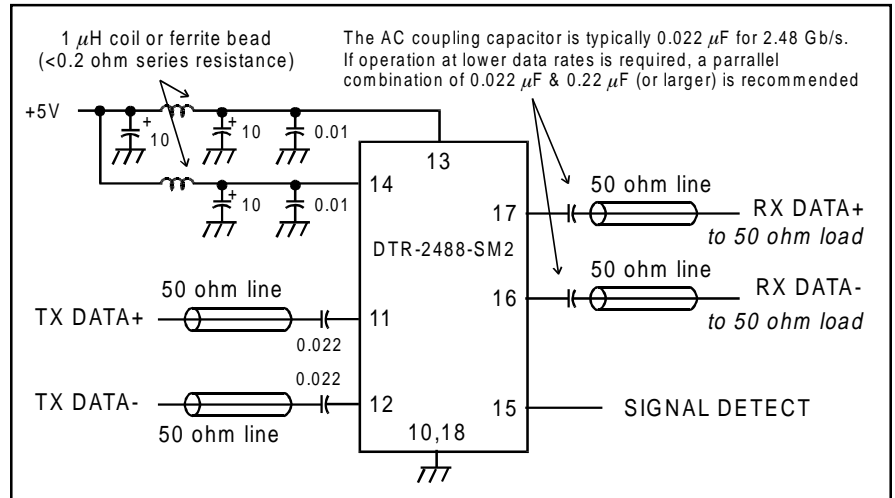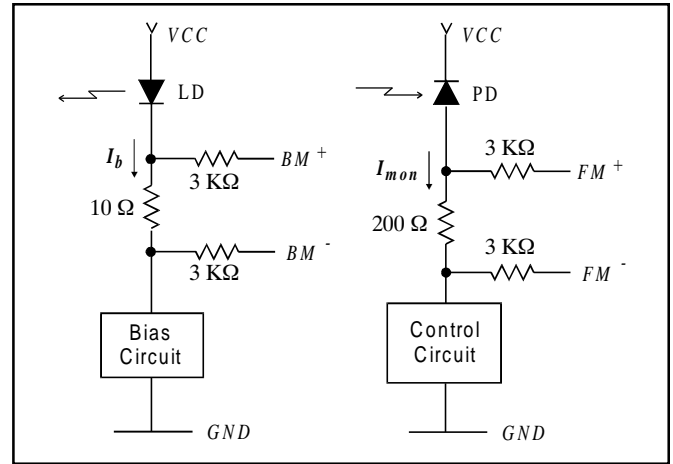


FC Receptacle Package

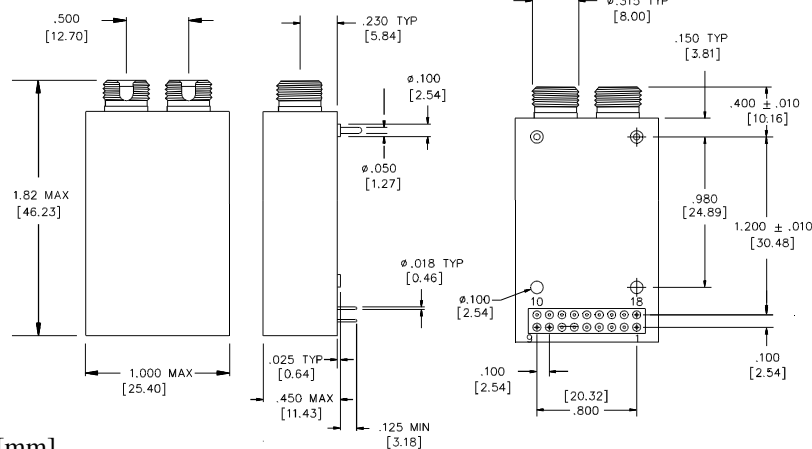


Dimension in inches [mm]

DTR-2488-SM2

Duplex SC Receptacle Package

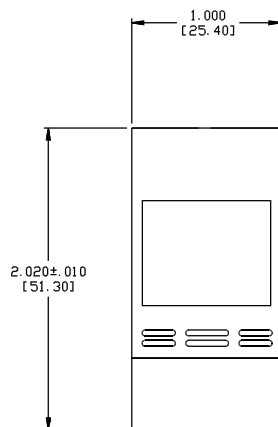

Dimension in inches [mm]

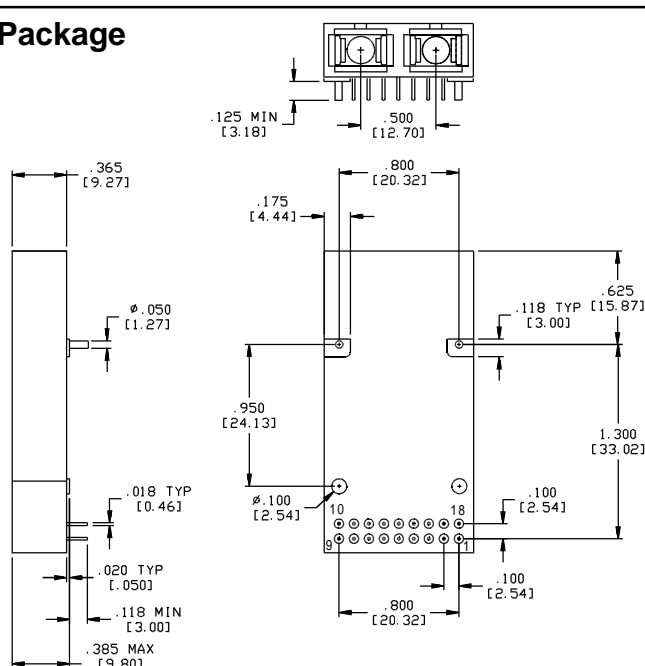

Laser Safety: All transceivers are Class I Laser products per FDA/CDRH and IEC-825 standards. They must be operated under specified operating conditions.

Optical Communication Products, Inc.
DATE OF MANUFACTURE:


MANUFACTURED IN THE USA

This product complies with

21 CFR 1040.10 and 1040.11

Meets Class I Laser Safety Requirements

ST Receptacle Package

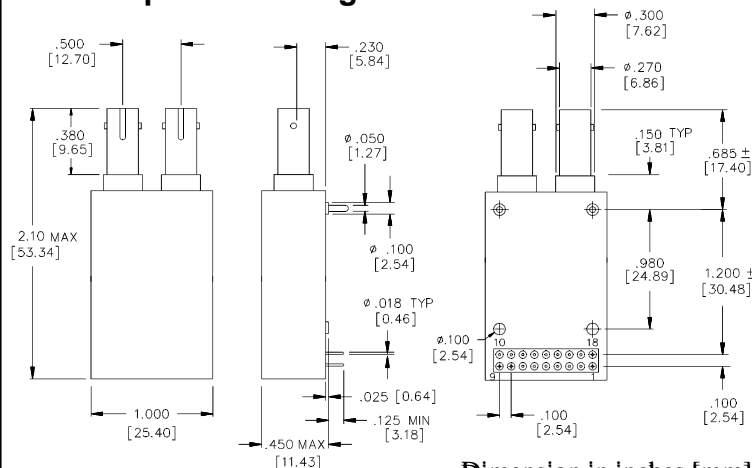

Dimension in inches [mm]

PIN	FUNCTION	PIN	FUNCTION
1	N/C	10	TX GND
2	N/C	11	TD+ (TX DATA IN +)
3	N/C	12	TD- (TX DATA IN -)
4	N/C	13	V _{CC} TX
5	BM- (BIAS MONITOR -)	14	V _{CC} RX
6	BM+ (BIAS MONITOR +)	15	SD (RX SIGNAL DETECT)
7	TX DISABLE	16	RD- (RX DATA OUT -)
8	FM+ (FACET MONITOR +)	17	RD+ (RX DATA OUT +)
9	FM- (FACET MONITOR -)	18	RX GND

Related OC-48/STM-16 Transceiver, Transmitter & Receiver Modules

DTR-2488-SM & DTC-48: Transceiver without Clock Recovery (1x9) & Transceiver with Clock Recovery (2x9 package)

STX/SRX/SRC-48: Transmitter, Receiver without Clock Recovery & Receiver with Clock Recovery (24-pin DIP package)

Ordering Information

DTR - 2488 - SM2 - YY - Ln - DRn

Receptacle

Blank : SC Receptacle

ST : ST Receptacle

FC : FC Receptacle

Light Output Power

L1: - 7 dBm (typ.)

L0: - 3 dBm (typ.)

Distance Option

SR : Short Reach (“L1” only)

IR1 : Intermediate Reach (“L0” only)

NOTES

1. For full compliance with OC-48/STM-16 Short Reach, the DTR-2488-SM2-YY-L1-SR module are recommended.
2. For full compliance with OC-48/STM-16 Intermediate Reach/S-16.1 standard, the DTR-2488-SM2-YY-L0-IR1 modules are recommended.

Optical Communication Products, Inc.

9736 Eton Avenue, Chatsworth, CA 91311, Tel.: 818-701-0164, FAX: 818-701-1468

Optical Communication Products, Inc. reserves the right to make changes in equipment design or specifications without notice. Information supplied by Optical Communication Products, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by Optical Communication Products, Inc. for its use nor for any infringements of third parties which may result from its use. No license is granted by implication or otherwise under any patent right of Optical Communication Products, Inc.

©1998, Optical Communication Products, Inc. All rights reserved.

21737-0321, Rev. A

5-4-99

Contents

Description	1
Absolute Maximum Ratings	1
Features	1
Transmitter Performance Characteristics	2
Receiver Performance Characteristics	2
Transmitter Electrical Interface	2
Receiver Electrical Interface	2
Application Notes	3
Laser Bias & Facet Monitor Circuits	3
FC Receptacle Package	3
Duplex SC Receptacle Package	4
ST Receptacle Package	4
Related OC-48/STM-16 Transceiver, Transmitter & Receiver Modules	4
Ordering Information	4