

SN74ALS746 OCTAL BUFFER AND LINE DRIVER WITH INPUT PULLUP RESISTORS

SDAS052A – AUGUST 1984 – REVISED JANUARY 1995

- 3-State Outputs Drive Bus Lines or Buffer Memory Address Registers
- Input Pullup Resistors Added for Data-Bus Termination
- Data Flow-Through Pinout (All Inputs on Opposite Side From Outputs)
- Package Options Include Plastic Small-Outline (DW) Packages and Standard Plastic (N) 300-mil DIPs

description


This octal buffer and line driver is designed to have the performance of the 'ALS240A and, at the same time, offers a pinout with inputs and outputs on opposite sides of the package. This arrangement facilitates printed-circuit-board layout. In addition, 20-k Ω resistors have been added between all inputs and V_{CC} . This eliminates adding external resistors in applications where the data bus must be at a high level when all other connecting devices are at a high-impedance state.

The 3-state control gate is a 2-input NOR such that if either output-enable ($\overline{OE1}$ or $\overline{OE2}$) input is high, all eight outputs are in the high-impedance state.


The SN74ALS746 provides inverted data at the outputs.

The SN74ALS746 is characterized for operation from 0°C to 70°C.


DW OR N PACKAGE
(TOP VIEW)

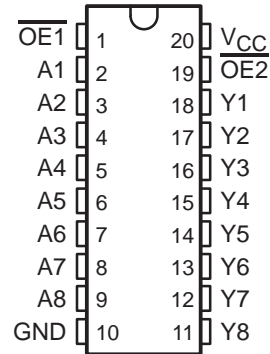

logic symbol†

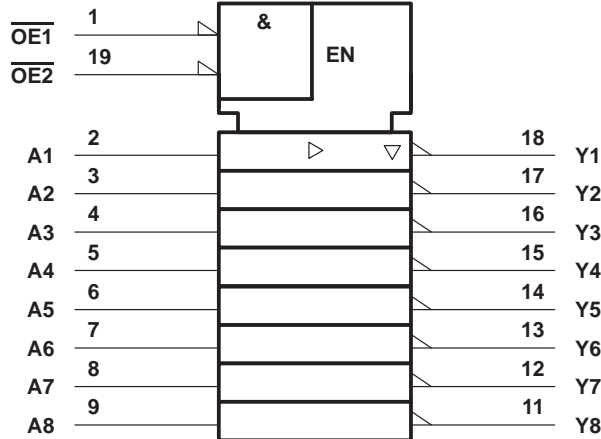

logic diagram (positive logic)

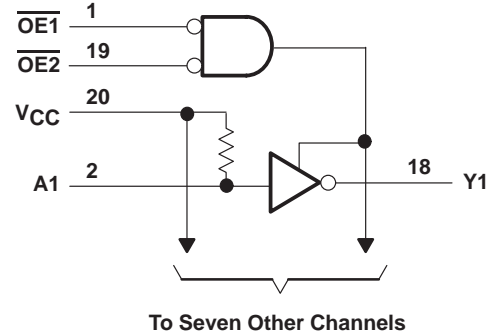

All input pullup resistors are 20 k Ω .

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

SN74ALS746

OCTAL BUFFER AND LINE DRIVER

WITH INPUT PULLUP RESISTORS

SDAS052A – AUGUST 1984 – REVISED JANUARY 1995

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage, V_{CC}	7 V
Input voltage, V_I	7 V
Operating free-air temperature range, T_A	0°C to 70°C
Storage temperature range	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

recommended operating conditions

	MIN	NOM	MAX	UNIT
V_{CC} Supply voltage	4.5	5	5.5	V
V_{IH} High-level input voltage	2			V
V_{IL} Low-level input voltage			0.8	V
I_{OH} High-level output current			–15	mA
I_{OL} Low-level output current			24	mA
T_A Operating free-air temperature	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP [‡]	MAX	UNIT
V_{IK}		$V_{CC} = 4.5\text{ V}$, $I_I = -18\text{ mA}$			–1.2	V
V_{OH}		$V_{CC} = 4.5\text{ V to } 5.5\text{ V}$, $I_{OH} = -0.4\text{ mA}$	$V_{CC} - 2$			V
		$V_{CC} = 4.5\text{ V}$, $I_{OH} = -3\text{ mA}$	2.4	3.2		
		$V_{CC} = 4.5\text{ V}$, $I_{OH} = -15\text{ mA}$	2			
V_{OL}		$V_{CC} = 4.5\text{ V}$, $I_{OL} = 12\text{ mA}$		0.25	0.4	V
		$V_{CC} = 4.5\text{ V}$, $I_{OL} = 24\text{ mA}$		0.35	0.5	
I_{OZH}		$V_{CC} = 5.5\text{ V}$, $V_O = 2.7\text{ V}$			20	μA
I_{OZL}		$V_{CC} = 5.5\text{ V}$, $V_O = 0.4\text{ V}$			–20	μA
I_I	A	$V_{CC} = 5.5\text{ V}$, $V_I = 5.5\text{ V}$			0.1	mA
	$\overline{OE1}, \overline{OE2}$				0.1	
I_{IH}	A	$V_{CC} = 5.5\text{ V}$, $V_I = 2.7\text{ V}$			–0.2	mA
	$\overline{OE1}, \overline{OE2}$				20	
I_{IL}	A	$V_{CC} = 5.5\text{ V}$, $V_I = 0.4\text{ V}$			–0.6	mA
	$\overline{OE1}, \overline{OE2}$				–0.1	
$I_{O\$}$		$V_{CC} = 5.5\text{ V}$, $V_O = 2.25\text{ V}$	–30		–112	mA
I_{CC}		$V_{CC} = 5.5\text{ V}$, Outputs high		7	12	mA
		$V_{CC} = 5.5\text{ V}$, Outputs low		13	22	
		$V_{CC} = 5.5\text{ V}$, Outputs disabled		11	19	

[‡] All typical values are at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$.

[§] The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS} .



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

switching characteristics (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$ $C_L = 50 \text{ pF},$ $R_1 = 500 \, \Omega,$ $R_2 = 500 \, \Omega,$ $T_A = \text{MIN to MAX}^\dagger$		UNIT
			MIN	MAX	
t_{PLH}	A	Y	3	12	ns
t_{PHL}			2	9	
t_{PZH}	\overline{OE}	Y	5	15	ns
t_{PZL}			8	20	
t_{PHZ}	\overline{OE}	Y	1	10	ns
t_{PLZ}			2	12	

[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

SN74ALS746


OCTAL BUFFER AND LINE DRIVER

WITH INPUT PULLUP RESISTORS

SDAS052A – AUGUST 1984 – REVISED JANUARY 1995

PARAMETER MEASUREMENT INFORMATION

SERIES 54ALS/74ALS AND 54AS/74AS DEVICES

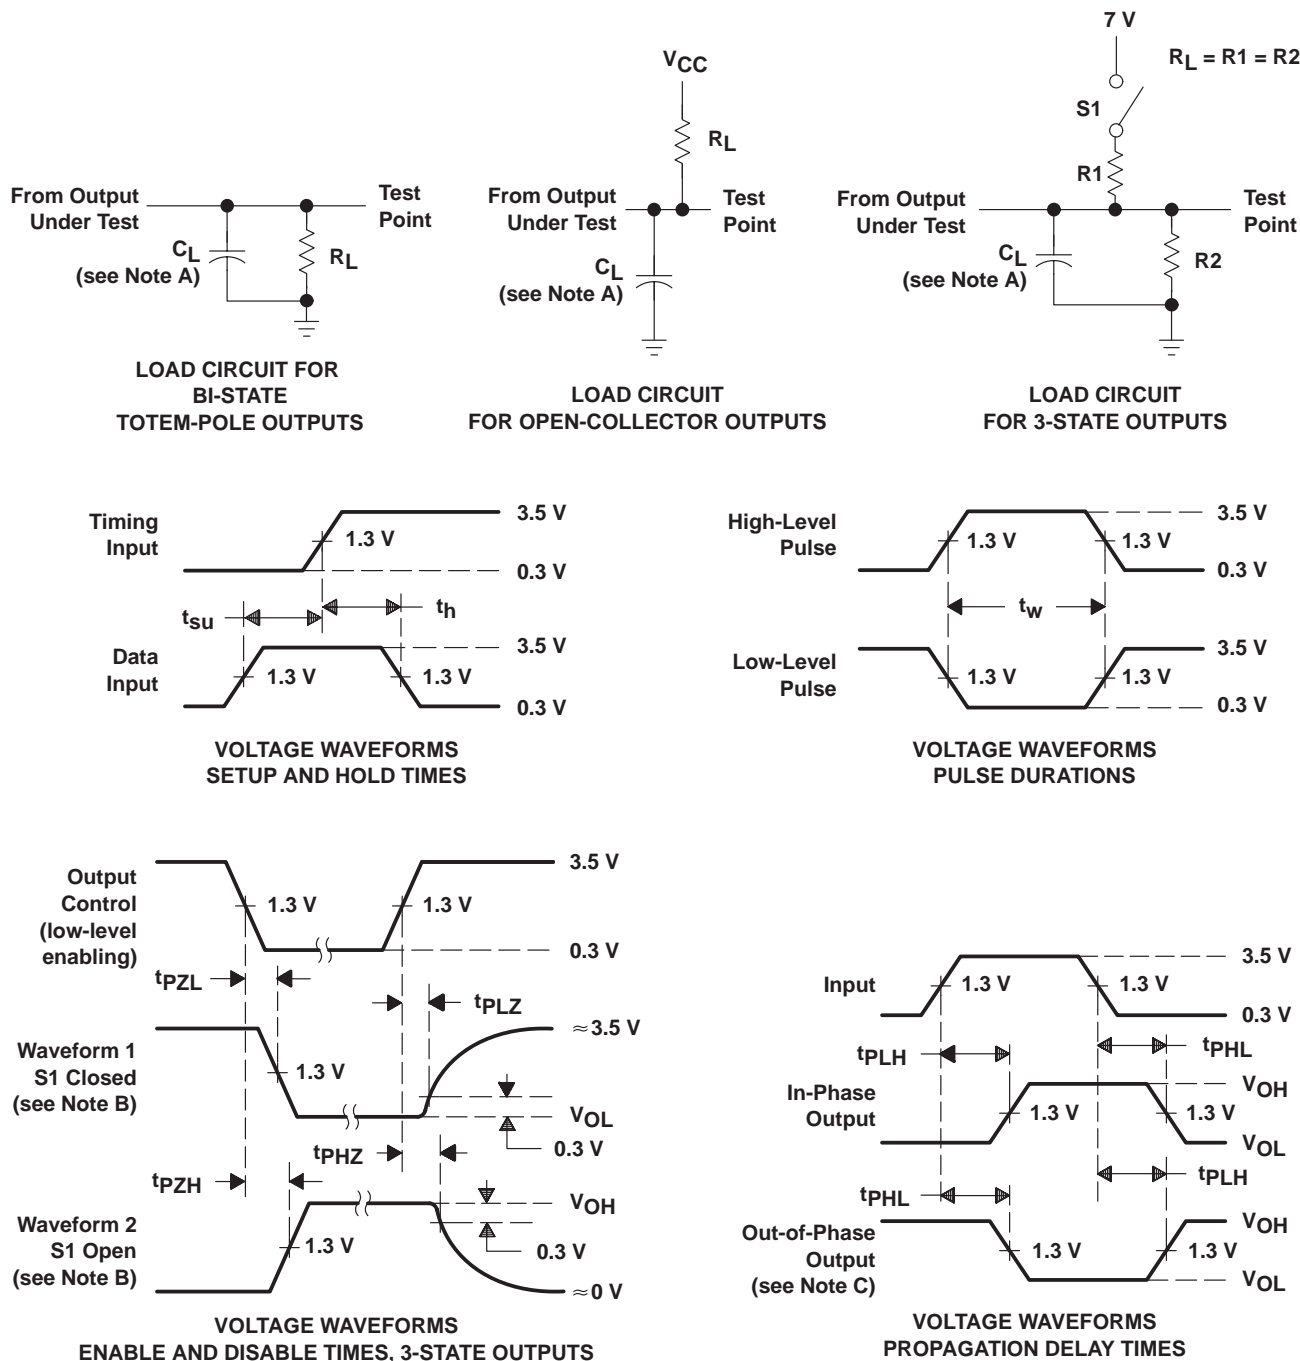

- NOTES: A. C_L includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. When measuring propagation delay items of 3-state outputs, switch S1 is open.
- D. All input pulses have the following characteristics: $PRR \leq 1$ MHz, $t_r = t_f = 2$ ns, duty cycle = 50%.
- E. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuits and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.