

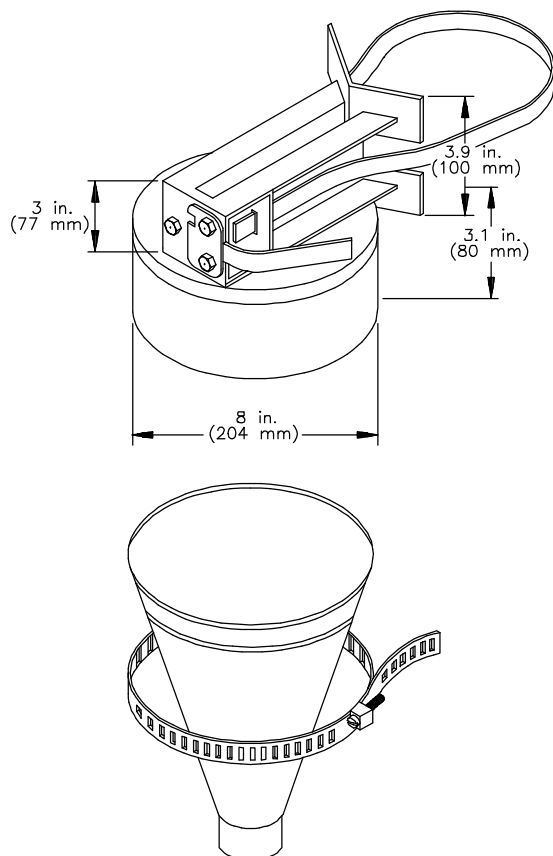





DB8002E-Y / DB8003E-Y / DB8004E-Y / DB8005E-Y / DB8006E-Y

POWER DIVIDER 880-960 MHz



*Power Divider used to phase
several antennas together.*



Specifications are for reference only.

099030-001-B 3/98

To Feed Antennas . . .	. . . 2 Antennas: DB8002E-Y . . . 3 Antennas: DB8003E-Y . . . 4 Antennas: DB8004E-Y . . . 5 Antennas: DB8005E-Y . . . 6 Antennas: DB8006E-Y
Frequency Range	880-960 MHz
Termination	7/16 DIN Female
Impedance	50 OHM
VSWR	Tx: < 1.1:1, Rx: < 1.2:1
Insertion Loss	< 0.05 dB
Material	Casting: Aluminum Ground Plane: Brass, Copper
Mounting	Use steelband, supplied (Ø from 50 to 400mm).



DECIBEL PRODUCTS
A Division of Allen Telecom Inc.

8635 Stemmons Freeway • P. O. Box 569610 • Dallas, Texas 75356-9610
214 / 631-0310 • Fax: 214 / 631-4706

