

PT4471—24V

100 Watt 30 Amp Programmable
Isolated DC-DC Converter

Power Trends Products
from Texas Instruments



SLTS093

(Revised 6/30/2000)



Patent pending on package assembly

Features


- Input Range: 18V to 36V
- Programmable Output:
1.3V to 3.5V
- Temp Range: -40° to +100°C
- 1500 VDC Isolation
- 88% Efficiency
- Remote On/Off
- Differential Remote Sense
- N+1 Current Sharing
- Over-Current Protection
- Over-Temperature Protection
- Over-Voltage Protection
- Solderable Copper Case

Description

The PT4471 Excalibur™ module combines state-of-the-art power conversion technology with un-paralleled flexibility. Operating off a standard 24V telecom input, the PT4471 provides a full 100W output at load currents up to 30A, and over the programmable output voltage range of 1.3V to 3.5V.

The PT4471 features high efficiencies, ultra-fast transient response, and the capability for true N+1 current sharing. This product also includes output short circuit and over-temperature protection.

Standard Application

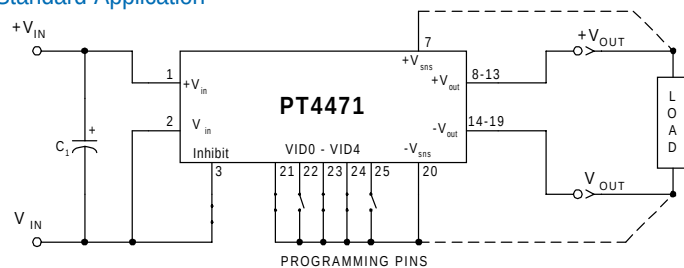

- C₁ = Optional 33μF, 50V electrolytic capacitor
- Programming pins, VID0-VID4, are shown configured for V_O = 3.3V
- For normal operation, pin 3 (Inhibit) must be connected to -V_{IN}.
- For operation in N+1 configuration, consult the related application note.
- Pins 6 & 26 are used for N+1 configurations only.

Specifications

Characteristics (T _A =25°C unless noted)	Symbols	Conditions (V _{IN} =24V, V _O =3.3V unless noted)	PT4471			
			Min	Typ	Max	Units
Output Current	I _O	Over V _{IN} range	0	—	30	A
Current Limit	I _{CL}	V _{IN} = 18V	—	35	—	A
Current Sharing		with PT4495 current booster	—	—	±10	%
Input Voltage Range	V _{IN}	I _O = 0 to max I _O	18	24	36	V
Output Voltage Tolerance	ΔV _O	Over V _{IN} Range T _A = -40 to +100°C Case	—	±1.0	±2.0	%V _O
Line Regulation	Reg _{LINE}	Over V _{IN} range @ max I _O	—	±0.1	±1.0	%V _O
Load Regulation	Reg _{LOAD}	0 to 100% of I _O max	—	±0.5	±1.0	%V _O
V _O Ripple/Noise	V _n	I _O = I _O max	—	60 45	75 55	mV _{pp}
Transient Response	t _{tr}	50% to 75% I _O max @ 0.1A/μs V _O over/undershoot (no ext caps)	—	N/A 1.0	—	μSec %V _O
		50% to 100% I _O max @ 1.0A/μs V _O over/undershoot (no ext. caps)	—	75 5	—	μSec %V _O
			—	—	—	
V _O Rise Time	V _{OTR}	At turn-on	—	—	10	mSec
Efficiency	η	I _O =15A	—	88.5	—	%
Switching Frequency	f _O	—	—	300	—	kHz
Remote On/Off	Off On	Open or 2.5 to 5.1 VDC above -V _{IN} Short or 0 to 0.8 VDC above -V _{IN}	—	—	—	—
Over-Voltage Protection	OVP	Shutdown and latch off	—	125	—	%V _O
Isolation	—	—	1500	—	—	VDC
Maximum Operating Temperature Range	T _C	Measured at center of case	-40	—	+100	°C
Over-Temperature Shutdown Point	OTP	Case temperature - Auto reset	—	+105	—	°C
Reliability	MTBF	Per Bellcore TR-332 50% stress, t = 40°C, ground benign	1.4	—	—	10 ⁶ Hrs
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3, 1mS, Half-sine, mounted to a fixture	—	TBD	—	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000Hz, Soldered in a PC board	—	TBD	—	G's
Weight	—	—	—	90	—	grams

PT4471— 24V

100 Watt 30 Amp Programmable
Isolated DC-DC Converter

Pin-Out Information

Pin	Function	Pin	Function
1	+V _{in}	14	-V _{out}
2	-V _{in}	15	-V _{out}
3	Inhibit	16	-V _{out}
4	Do not connect	17	-V _{out}
5	Do not connect	18	-V _{out}
6	Sync	19	-V _{out}
7	+V _{sense}	20	-V _{sense}
8	+V _{out}	21	VID0
9	+V _{out}	22	VID1
10	+V _{out}	23	VID2
11	+V _{out}	24	VID3
12	+V _{out}	25	VID4
13	+V _{out}	26	Share

Programming Information

VID3	VID2	VID1	VID0	VID4=1 V _{out}	VID4=0 V _{out}
1	1	1	1	2.0V	1.30V
1	1	1	0	2.1V	1.35V
1	1	0	1	2.2V	1.40V
1	1	0	0	2.3V	1.45V
1	0	1	1	2.4V	1.50V
1	0	1	0	2.5V	1.55V
1	0	0	1	2.6V	1.60V
1	0	0	0	2.7V	1.65V
0	1	1	1	2.8V	1.70V
0	1	1	0	2.9V	1.75V
0	1	0	1	3.0V	1.80V
0	1	0	0	3.1V	1.85V
0	0	1	1	3.2V	1.90V
0	0	1	0	3.3V	1.95V
0	0	0	1	3.4V	2.00V
0	0	0	0	3.5V	2.05V

Logic 0 = Pin 20 potential (remote sense gnd)
Logic 1 = Open circuit (no pull-up resistors)
VID4 may not be changed while the unit is operating.

Ordering Information

PT 4471□ = 1.3 to 3.5 Volts

(For dimensions and PC board layout, see
Package Styles 1200, 1210 and 1215.)




PT Series Suffix (PT1234X)

Case/Pin
Configuration


Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

TYPICAL CHARACTERISTICS

PT4471, V_o = 3.3V (See Note A)

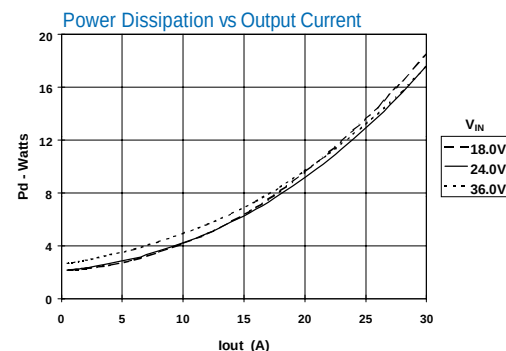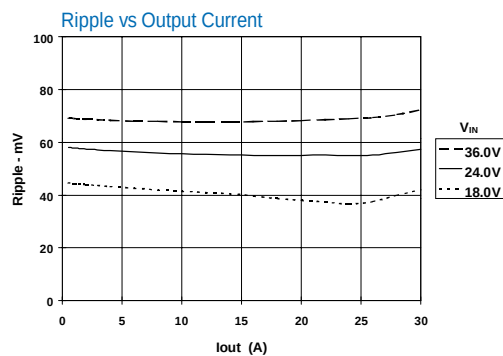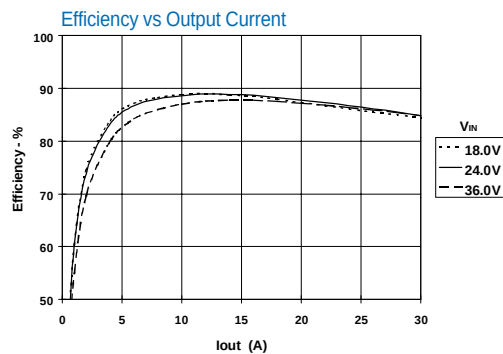

Safe Operating Area, V_{in} = 24V, V_o = 3.3V (See Note B)

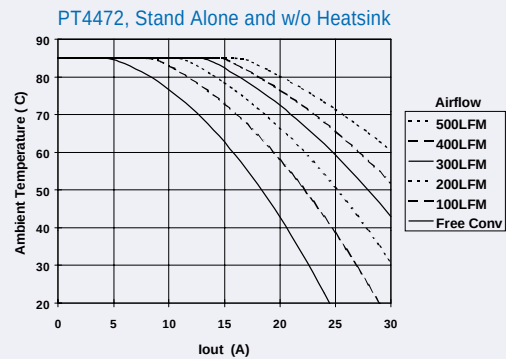

Note A: All data listed in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the DC-DC Converter.
Note B: SOA curves represent operating conditions at which the temperature of the metal case is at or below the maximum specified 100°C

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.