

LM317M

3-TERMINAL ADJUSTABLE REGULATOR

SLVS297A – APRIL 2000 – REVISED JULY 2000

- Output Voltage Range Adjustable From 1.2 V to 37 V
- Output Current Greater Than 500 mA
- Internal Short-Circuit Current Limiting
- Thermal Overload Protection
- Output Safe-Area Compensation


description

The LM317M device is an adjustable 3-terminal positive voltage regulator capable of supplying more than 500 mA over an output-voltage range of 1.2 V to 37 V. It is exceptionally easy to use and requires only two external resistors to set the output voltage. Further, both line and load regulation are better than standard fixed regulators. The LM317M is packaged in the DPAK/TO-252-equivalent KTP package, which is easy to handle and use.

In addition to higher performance than fixed regulators, the device includes on-chip current limiting, thermal overload protection, and safe operating area protection. All overload protection remains fully functional if the ADJUST terminal is disconnected.

Normally, no capacitors are needed unless the device is more than 6 inches from the input filter capacitors, in which case an input bypass capacitor is needed. An optional output capacitor can be added to improve transient response. The ADJUST terminal can be bypassed to achieve very high ripple-rejection ratios, which are difficult to achieve with standard 3-terminal regulators.

The LM317M is characterized for operation over the virtual junction temperature range of 0°C to 125°C.

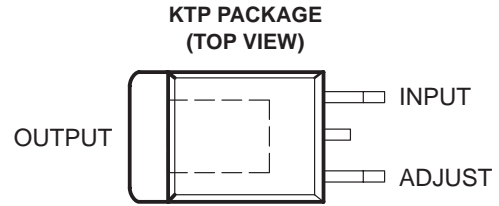

The OUTPUT terminal is in electrical contact with the mounting base.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2000, Texas Instruments Incorporated

LM317M

3-TERMINAL ADJUSTABLE REGULATOR

SLVS297A – APRIL 2000 – REVISED JULY 2000

absolute maximum ratings over operating temperature range (unless otherwise noted)[†]

Input-to-output differential voltage, $V_I - V_O$	40 V
Package thermal impedance, θ_{JA} (see Notes 1 and 2)	28°C/W
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. Maximum power dissipation is a function of $T_J(\max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(\max) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can impact reliability.
2. The package thermal impedance is calculated in accordance with JESD 51.

recommended operating conditions

	MIN	MAX	UNIT
Input-to-output voltage differential, $V_I - V_O$		37	V
Output current, I_O		500	mA
Operating virtual-junction temperature, T_J	0	125	°C

electrical characteristics over recommended operating virtual-junction temperature range, $V_I - V_O = 5$ V, $I_O = 0.1$ A (unless otherwise noted)

PARAMETER	TEST CONDITIONS [‡]		MIN	TYP	MAX	UNIT
Line regulation (see Note 3)	$V_I - V_O = 3$ V to 40 V	$T_J = 25^\circ\text{C}$		0.01	0.04	%V
		Full temperature range		0.02	0.07	
Load regulation	$I_O = 10$ mA to 500 mA	$T_J = 25^\circ\text{C}$		0.1	0.5	%V _O
		Full temperature range		0.3	1.5	
ADJUST terminal current				50	100	μA
ADJUST terminal current change	$V_I - V_O = 3$ V to 40 V,	$I_O = 10$ mA to 500 mA		0.2	5	μA
Reference voltage	$V_I - V_O = 3$ V to 40 V,	$I_O = 10$ mA to 500 mA	1.2	1.25	1.3	V
Output-voltage temperature stability				0.7%		
Minimum load current to maintain regulation				3.5	10	mA
Maximum output current	$V_I - V_O \leq 15$ V		500	900		mA
	$V_I - V_O = 40$ V, $P_D \leq P_D(\max)$	$T_J = 25^\circ\text{C}$	150	250		
Output noise voltage (% of V _O)	$f = 10$ Hz to 10 KHz,	$T_J = 25^\circ\text{C}$		0.003%		
Ripple rejection (see Note 4)	$V_O = 10$ V, $f = 120$ Hz, $T_J = 25^\circ\text{C}$	$C_{ADJ} = 0$		65		dB
		$C_{ADJ} = 10$ μF		66	80	
Long-term stability		$T_J = 125^\circ\text{C}$		0.3	1	%/ 1k Hrs

[‡] Pulse-testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible.

NOTES: 3. Input voltage regulation is expressed here as the percentage change in output voltage per 1-V change at the input.

4. C_{ADJ} is connected between the ADJUST pin and ground.



TYPICAL CHARACTERISTICS

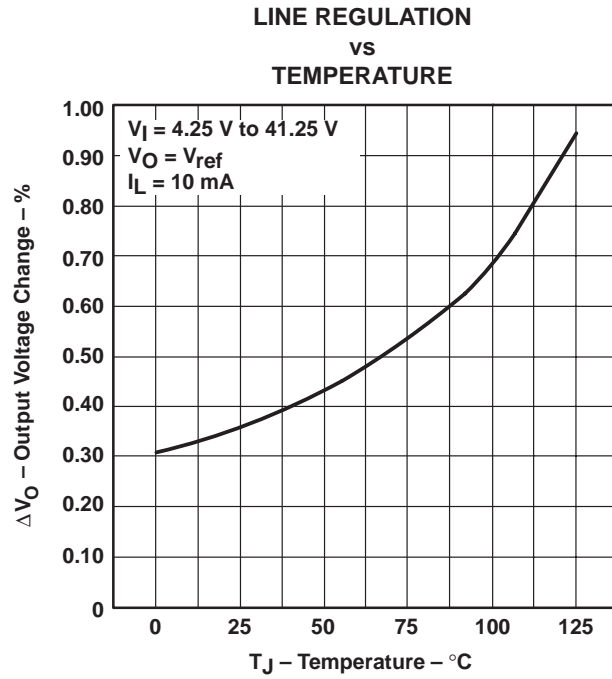


Figure 1

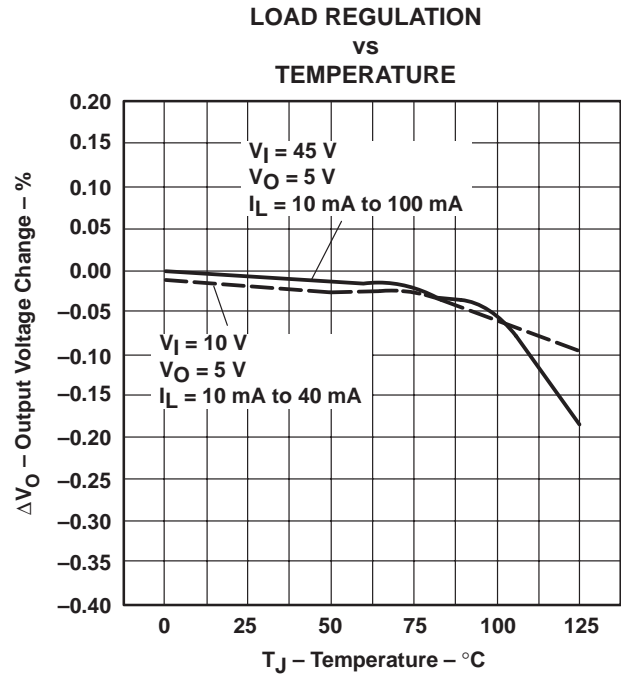


Figure 2

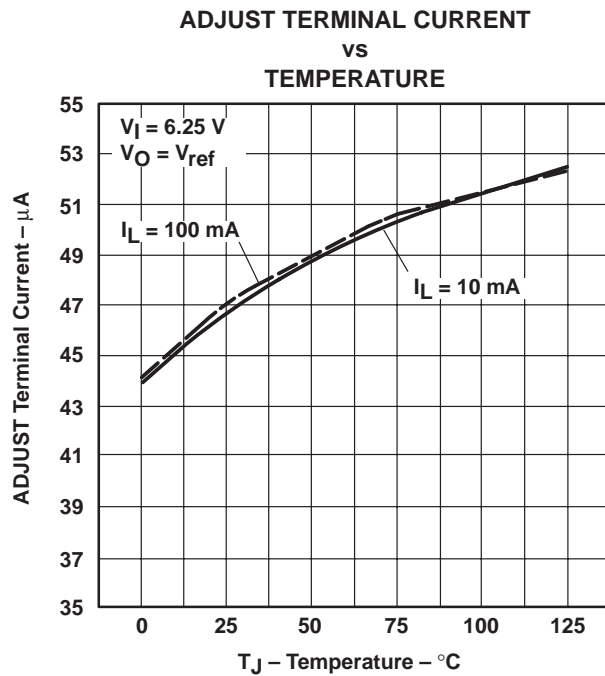


Figure 3

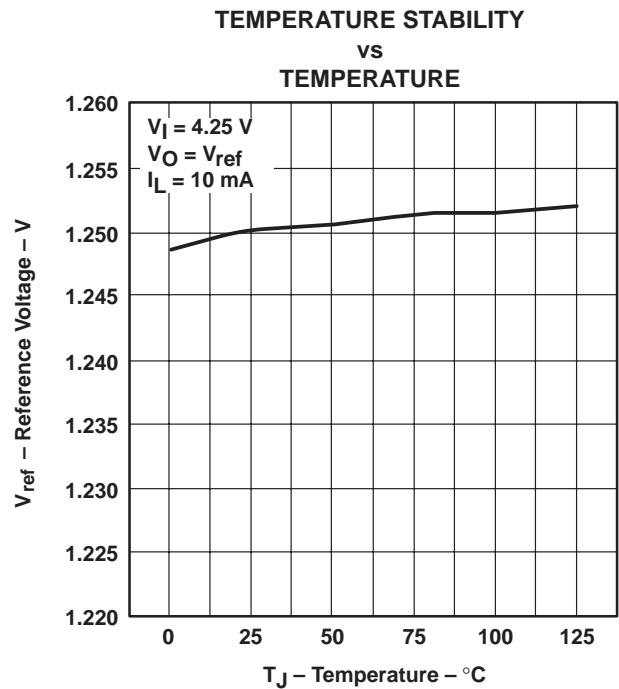


Figure 4

LM317M

3-TERMINAL ADJUSTABLE REGULATOR

SLVS297A – APRIL 2000 – REVISED JULY 2000

TYPICAL CHARACTERISTICS

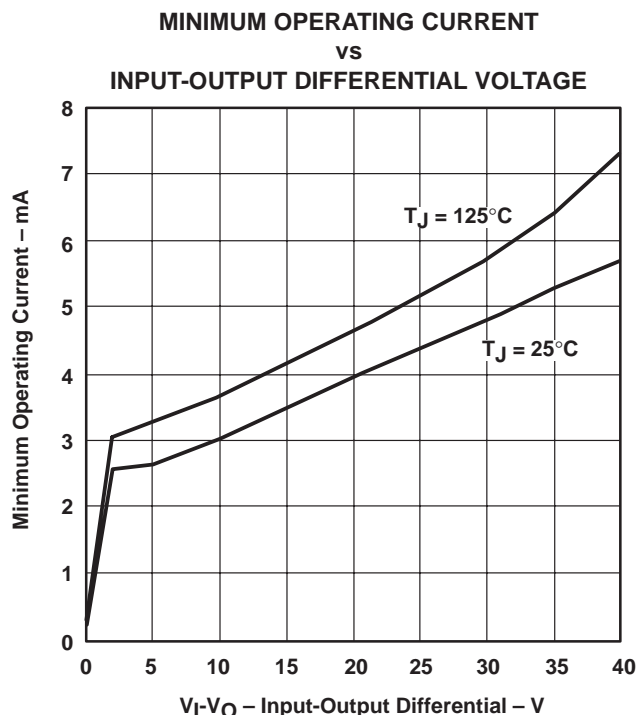


Figure 5

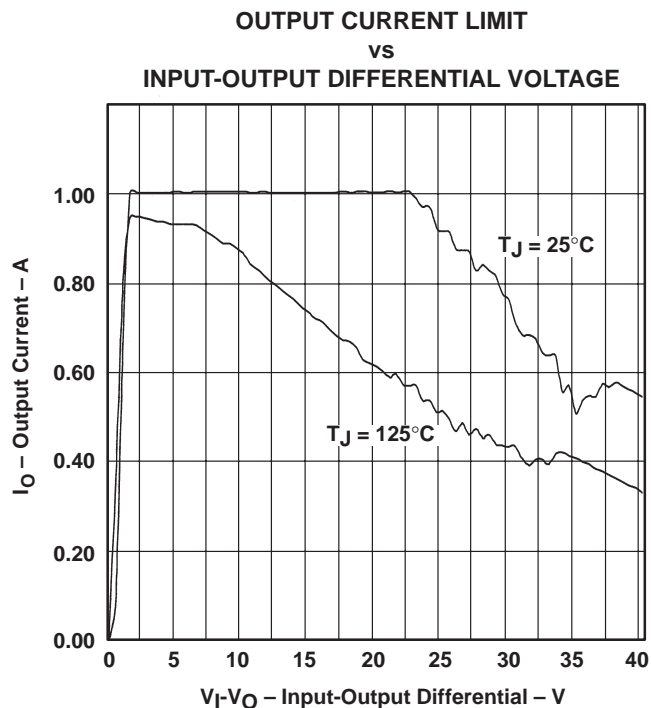


Figure 6

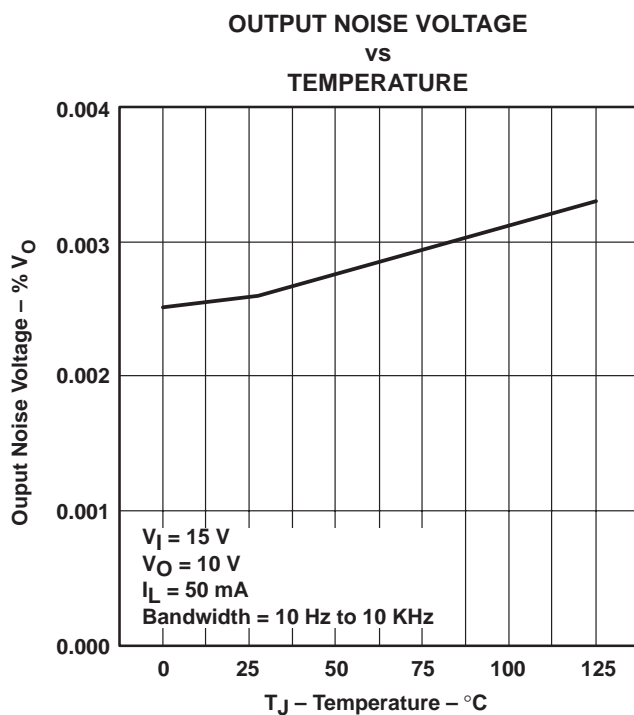


Figure 7

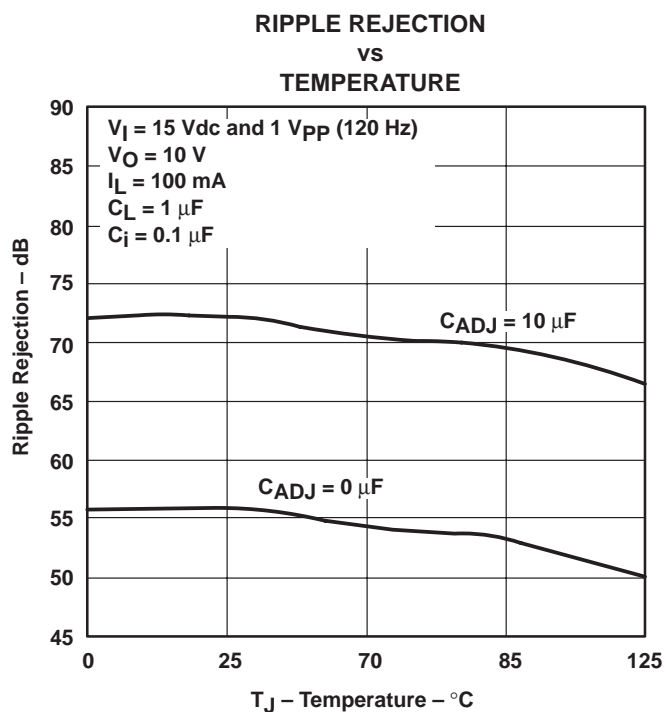


Figure 8

TYPICAL CHARACTERISTICS

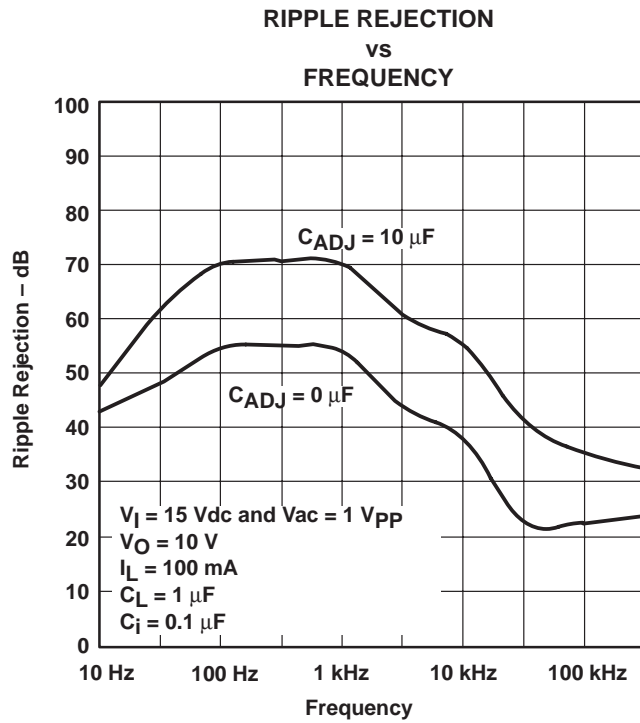


Figure 9

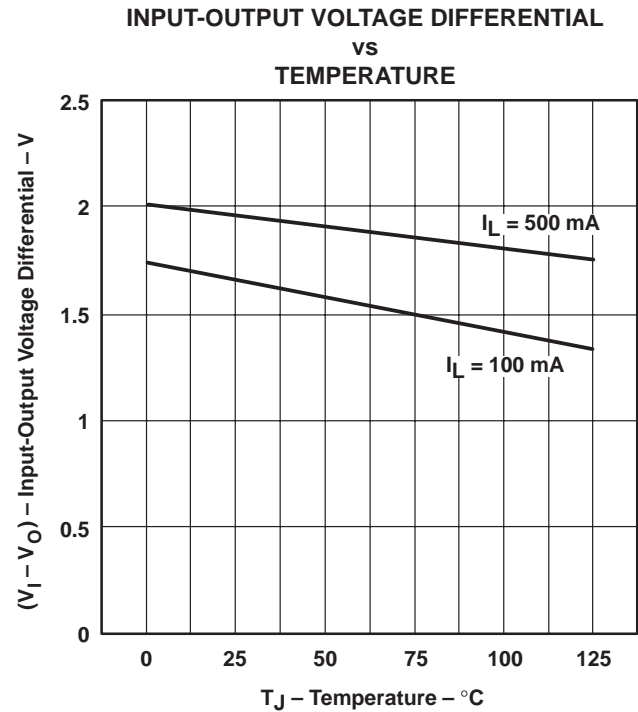


Figure 10

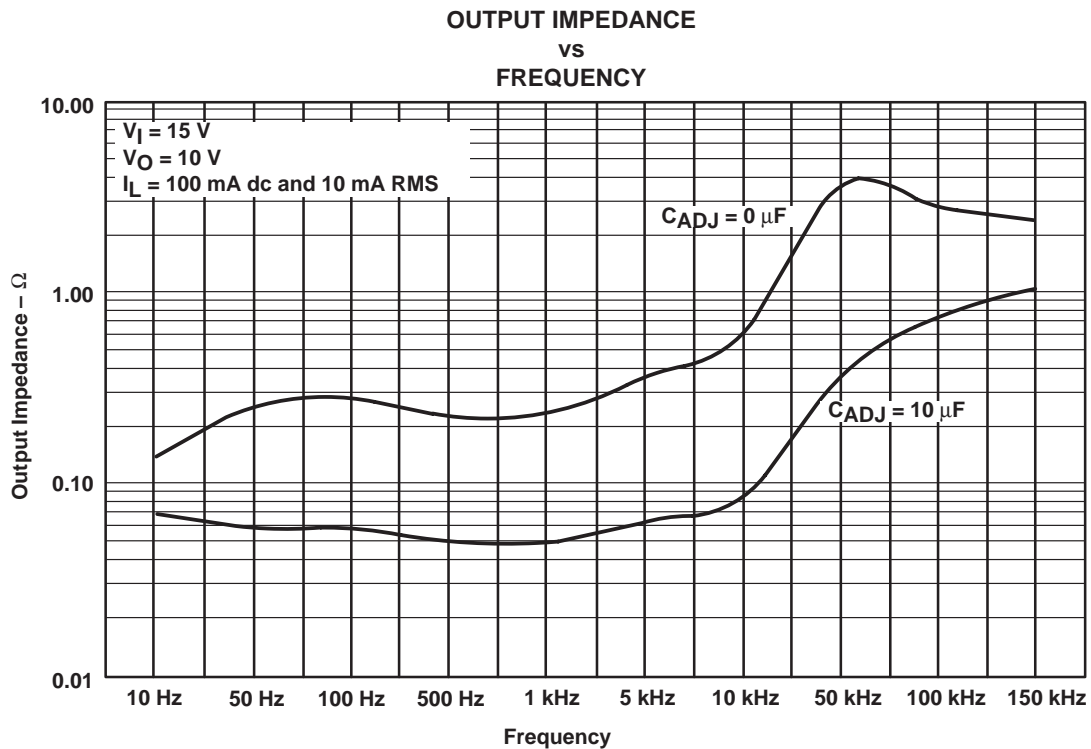


Figure 11

LM317M

3-TERMINAL ADJUSTABLE REGULATOR

SLVS297A – APRIL 2000 – REVISED JULY 2000

TYPICAL CHARACTERISTICS

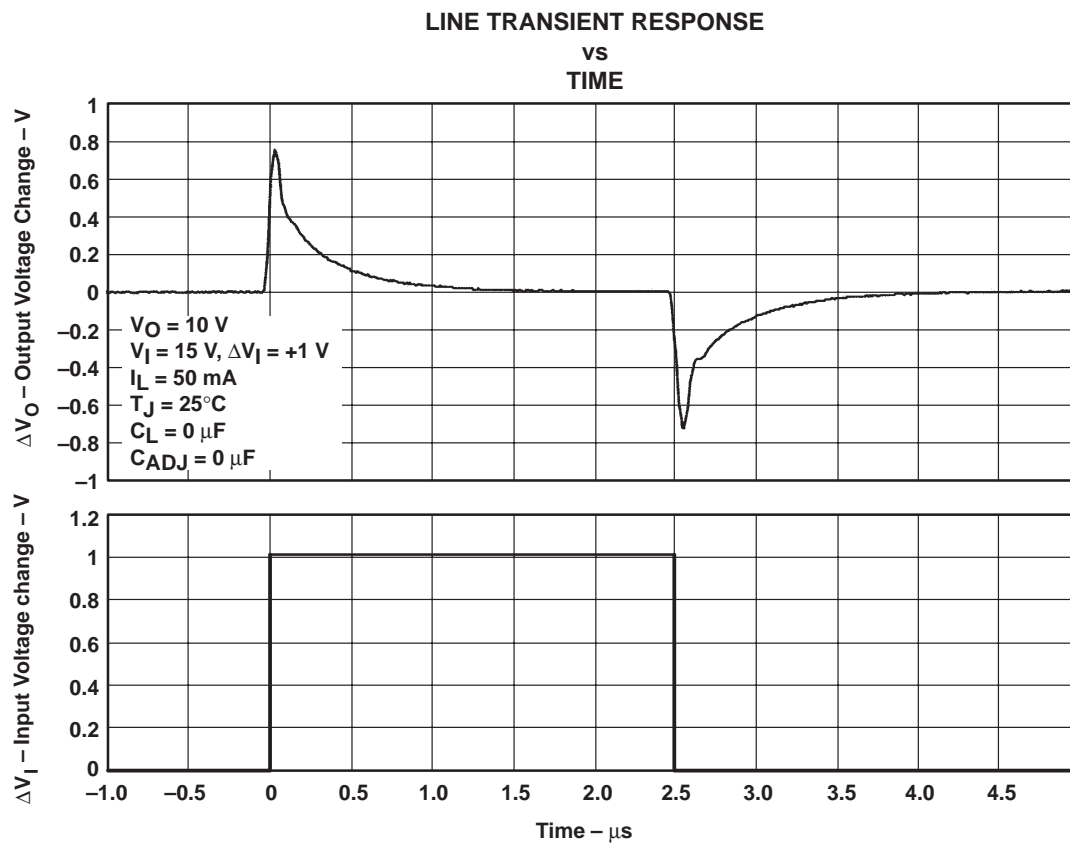


Figure 12

TYPICAL CHARACTERISTICS

LOAD TRANSIENT RESPONSE

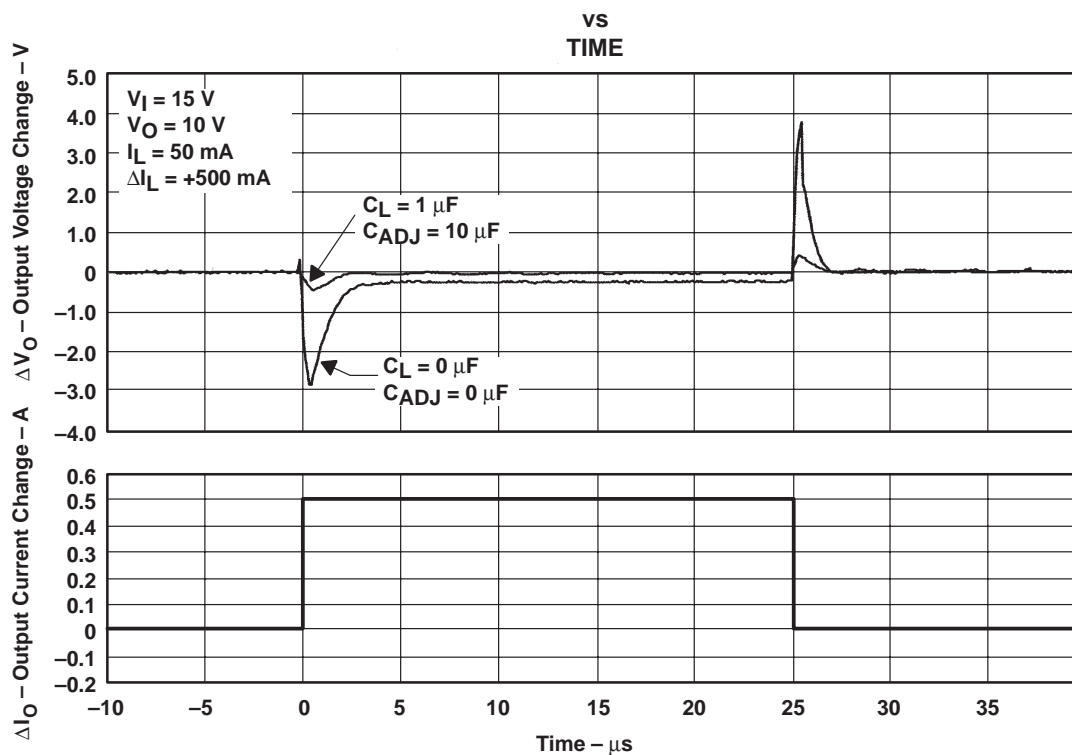



Figure 13

LM317M

3-TERMINAL ADJUSTABLE REGULATOR

SLVS297A – APRIL 2000 – REVISED JULY 2000

APPLICATION INFORMATION

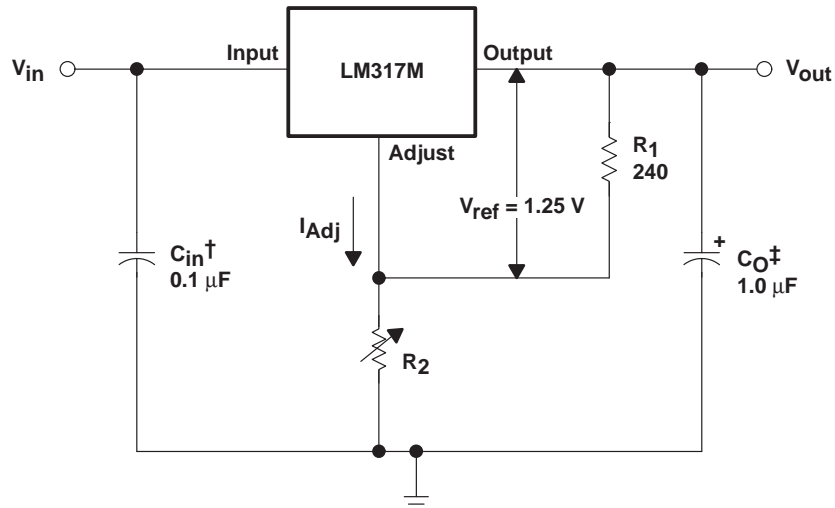

† C_{in} is not required if the regulator is close enough to the power supply filter.

‡ C_O improves transient response, but is not needed for stability.

V_{out} is calculated as shown:

$$V_{out} = V_{ref} \left(1 + \frac{R_2}{R_1} \right) + (I_{Adj} \times R_2)$$

Since I_{Adj} is typically less than 100 μA , it is negligible in most applications.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.