

Power Transformers

Series: **Y** (For General Use)
Series: **Z** (Conforming to Safety Standards)

Japan
Singapore



Upgraded reliability and safety by using double fit bob-bins

Industrial Property: Utility models 7 (incl.pending)


■ Features

- Casing structure
- Capable of automatic insertion

■ Recommended Applications

- TV
- Electric rice cookers
- Electric jar pots

■ Explanation of Part Numbers

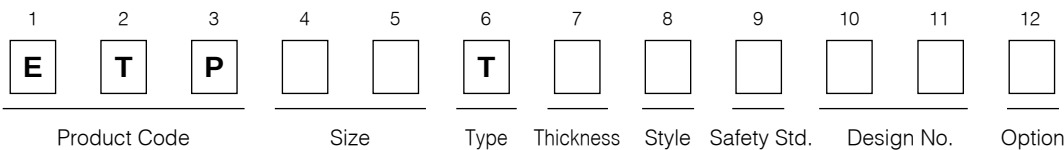

■ Packaging Methods

Size	E24B	E26B	E28B	E28C4	E28C6	E35B	E35C
Min. Quantity (pcs.)	50	50	50	50	100	50	50
Quantity/Shipping Box (pcs.)	200	200	200	200	100	100	100

■ Performance Specifications, Summary



Size	Conforming to Safety Standards			Maximum Output Power (VA)		
	Denki Yohin UL/CSA*2	Europe's Class II		Series Y*1	Series Z	
		IEC 65	IEC 950	Input AC 100 V	Input AC 100 V	Input AC 240 V
E24B	○	—	—	0.6	0.3	—
E26B	○	—	—	1.5	0.7	—
E28B	○	—	—	1.8	1.0	—
E28C4	○	—	—	—	1.5	—
E28C6	○	○	○	—	0.8	0.8
E35B	○	—	—	—	2.0	—
E35C	○	—	—	5.0	3.0	—

* 1. Non Conforming to Safety Standards


* 2. UL1411, CSA C22.2 No. 1

■ Dimensions in mm (not to scale)



E24B (Series Y · Z)

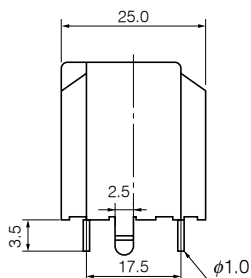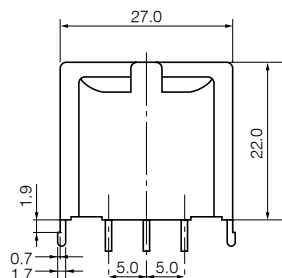


Recommended PWB piercing plan
(Top View)

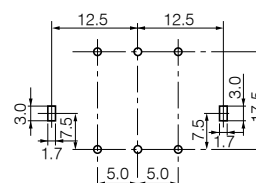



E26B (Series Y · Z)

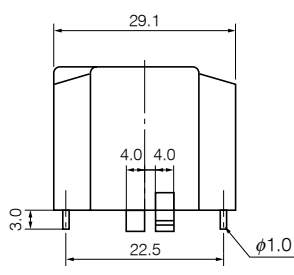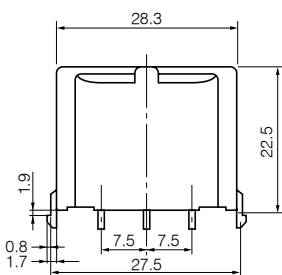


Recommended PWB piercing plan
(Top View)

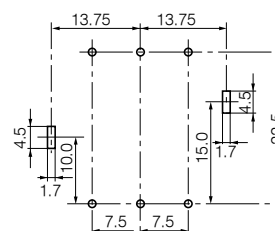

E28B (Series Y · Z)

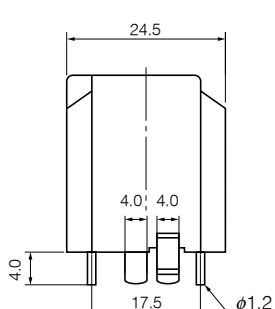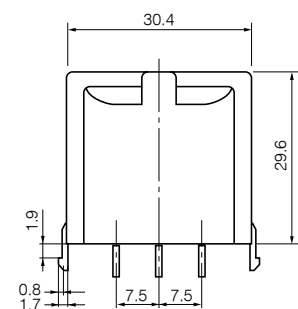


Recommended PWB piercing plan
(Top View)

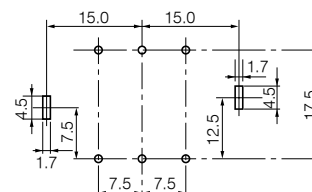


■ Dimensions in mm (not to scale)


E28C4 (Series Y · Z)

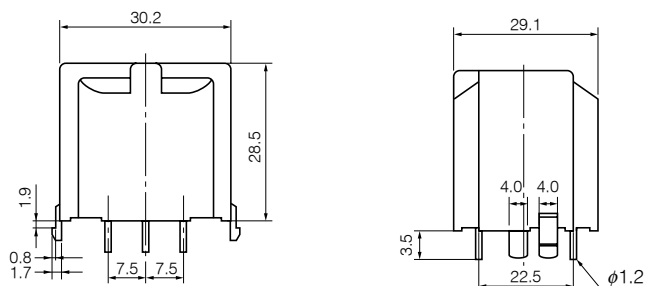


Recommended PWB piercing plan
(Top View)

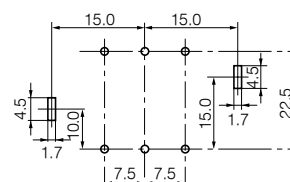


E28C6 (Series Z)

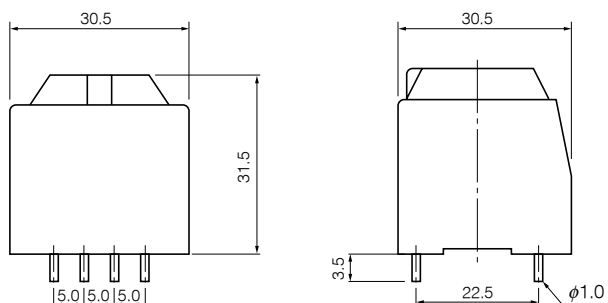


Recommended PWB piercing plan
(Top View)




E35B (Series Z)

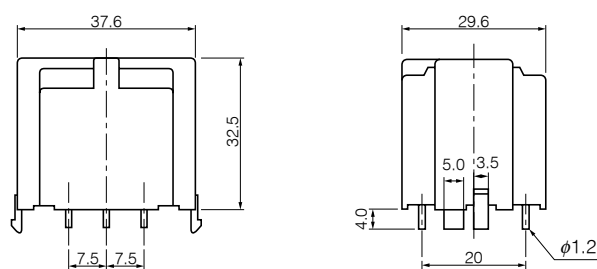

Recommended PWB piercing plan
(Top View)

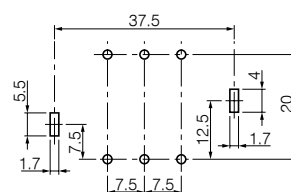

E35C (Series Y · Z)

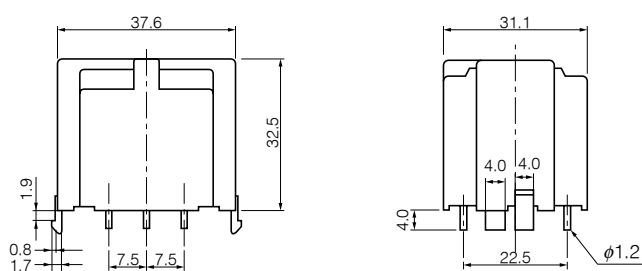

Recommended PWB piercing plan
(Top View)

