

Features

- Read + 2 write channel laser driver with oscillator and fast I/V amplifier plus a separate ROM laser driver with oscillator
- 200V/μs I/V amplifier
- 100X gain, 100mA low noise read channel
- 250X gain, 250mA and 150X gain, 150mA write channels
- 500MHz, 100mAp.p oscillator
- Write rise/fall times = 0.8ns
- Single +5V supply
- Auto-oscillator on-off with OUTEN signals

Applications

- Combo CD-RW + DVD-ROM
- CD-RW to 16X
- CD-R to 32X
- Writable optical disk drives

Ordering Information

Part No	Temp Range	Package	Outline #
EL6241CU	-40°C to+ 85°C	24-Pin QSOP	MDP0040
EL6241CL	-40°C to+ 85°C	24-Pin LPP	MDP0046

General Description


The EL6241C is a combination read + 2 write level laser driver and I/V amplifier, with an extra read + oscillator ROM channel for use in dual-laser 'combo' drivers. A separate (amplitude and frequency) oscillator modulates the selected output for laser noise reduction during read or write. All these functions are provided in a 24-lead QSOP package.

The CD pin, when high, selects the CD (write) laser. Positive current supplied to the IIN lines, through a user selected resistor, allow the full scale range of each amplifier to be matched to the full scale range of the users control DACs. When the write laser is selected, and the WEN pins are switched low, the respective current is summed to the output with 1ns rise and fall times.

The 100mAp.p (max) oscillator is switched on when both OSCEN and OUTEN pins are high. The CD line allows the oscillator to operate at different amplitudes and frequencies for each laser.

The entire chip is powered down when ENABLE is low. The user can define the gain of the I/V amplifier. With a slew rate of 200V/μs, the I/V amplifier can normally settle to 1% within 30ns.

Connection Diagrams

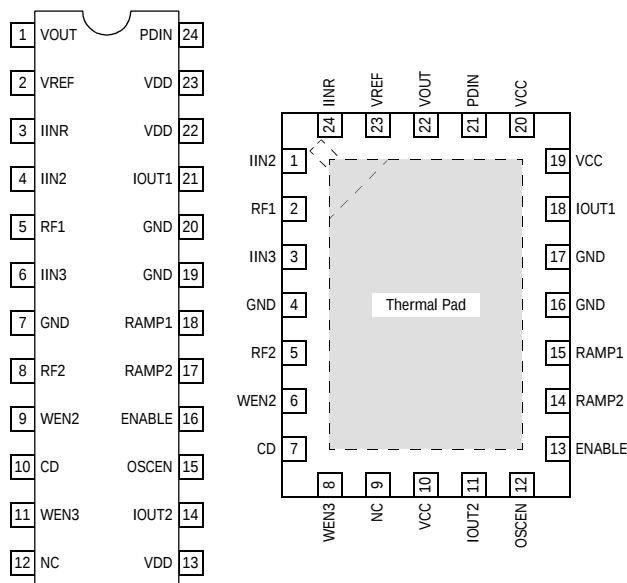

EL6241C - Product Brief

Dual Laser Driver with APC Amp

General Disclaimer

Specifications contained in this data sheet are in effect as of the publication date shown. Elantec, Inc. reserves the right to make changes in the circuitry or specifications contained herein at any time without notice. Elantec, Inc. assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.

élantec

HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

Elantec Semiconductor, Inc.

675 Trade Zone Blvd.

Milpitas, CA 95035

Telephone: (408) 945-1323

(888) ELANTEC

Fax: (408) 945-9305

European Office: +44-118-977-6020

Japan Technical Center: +81-45-682-5820

WARNING - Life Support Policy

Elantec, Inc. products are not authorized for and should not be used within Life Support Systems without the specific written consent of Elantec, Inc. Life Support systems are equipment intended to support or sustain life and whose failure to perform when properly used in accordance with instructions provided can be reasonably expected to result in significant personal injury or death. Users contemplating application of Elantec, Inc. Products in Life Support Systems are requested to contact Elantec, Inc. factory headquarters to establish suitable terms & conditions for these applications. Elantec, Inc.'s warranty is limited to replacement of defective components and does not cover injury to persons or property or other consequential damages.