

GH7C605B5A/GH7C605B5B

3mm Thickness Resin Stem Hologram Laser
for CD-ROM Drive(Equivalent to X40 Speed)

Features

- (1) With built-in high speed response OPIC[®] (MIN. 40MHz)
- (2) For CD-ROM drives (equivalent to $\times 40$ speed)
- (3) Built-in RF amp enables high speed reading of low reflective discs (CD-R/RW media).
- (4) Insert frame structure enables easy mounting compared to conventional pin structure.
- (5) Super-thin package (3mm thickness)
- (6) With built-in beam splitter and diffraction grating

[®]OPIC : (Optical IC) is a trademark of SHARP Corporation.

An OPIC consists of a light-detecting element and a signal-processing circuit integrated onto a single chip.

Model No.


- (1) GH7C605B5A.....Dual power supply
- (2) GH7C605B5B.....Single power supply

Applications

- (1) DVD-ROM drives
- (2) CD-ROM drives for notebook PCs

Outline Dimensions

(Unit : mm)

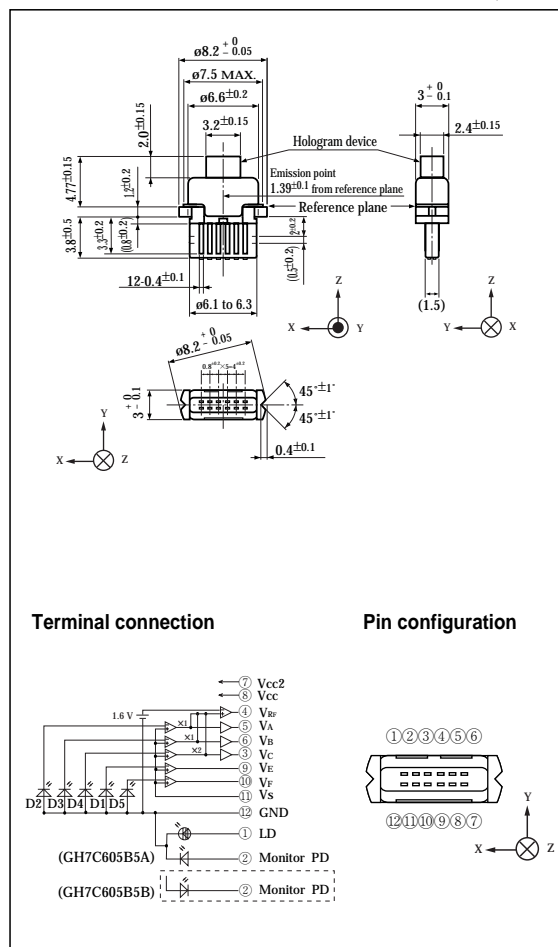

Absolute Maximum Ratings

(T_C=25°C)

Parameter	Symbol	Rating	Unit
① Optical power output	P _H	4.3	mW
Reverse voltage	V _R	2	V
		30	V
OPIC supply voltage	V _{CC}	6	V
② Operating temperature	T _{opr}	-10 to +70	°C
② Storage temperature	T _{stg}	-40 to +85	°C
③ Soldering temperature	T _{sold}	260	°C

① Output power from hologram laser, CW (Continuous Wave) drive

② Case temperature

③ At the position of 1.6mm from the lead base (Within 5s)

SHARP


Electro-optical Characteristics

(V_{CC}=5V, V_S=2.1V, T_C=25°C)


Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
①	Focal offset	DEF	V _{RF} =1.1V	-0.7	-	+0.7	μm
②	Focal error symmetry	B _{FES}	V _{RF} =1.1V	-25	-	+25	%
③	Radial error balance	B _{RES}	P _H =3.0mW	-25	-	+25	%
④	RF output amplitude	V _{RF}	P _H =3.0mW	0.67	1.60	-	V
⑤	FES output amplitude	V _{FES}	V _{RF} =1.1V	0.28	0.43	0.59	V
⑥	RES output amplitude	V _{RES}	V _{RF} =1.1V	0.08	0.15	0.20	V
Threshold current		I _{th}	—	-	25	39	mA
Operating current		I _{op}	P _H =3.0mW	-	36	50	mA
Operating voltage		V _{op}	P _H =3.0mW	-	1.85	2.2	V
Wavelength		λ _p	P _H =3.0mW	770	780	795	nm
Output current	GH7C605B5A	I _m	P _H =3.0mW, V _R =15V	0.06	0.32	0.60	mA
	GH7C605B5B			0.05	0.22	0.60	mA
Differential efficiency		η _d	$\frac{2.0\text{mW}}{I(3.0\text{mW})-I(1.0\text{mW})}$	-	0.27	-	mW/mA

① Distance between FES=0 and jitter minimum point
At the condition of FES sensitivity = 20%/1μm


② (a-b) / (a+b)

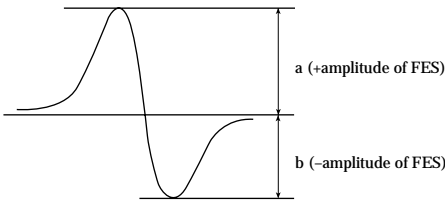

③ $\frac{a-b}{2 \times (a+b)}$

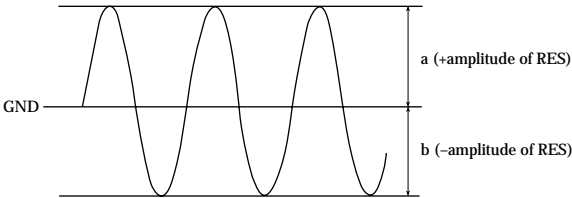

- ④ Amplitude of V_{RF} (focal servo ON, radial servo ON)
- ⑤ V_A-V_B (Focal vibration)
- ⑥ V_E-V_F (focal servo ON, radial servo OFF)

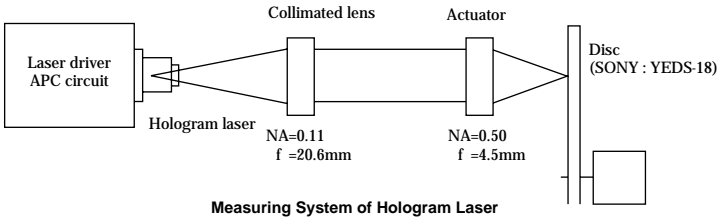


■

Electro-optical Characteristics of Laser Diode (Design Standard*)

(T_C=25°C)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Emission characteristics	※1 Symmetry	Parallel	S//	Po=3mW, Into NA=0.11	-25	-	+25	%	
		Perpendicular	S⊥		-15	-	+15	%	
Misalignment position			Δx	—	-80	-	+80	μm	
			Δy		-80	-	+80	μm	
			Δz		-80	-	+80	μm	
Interference pattern intensity			α	Po=3mW	-	-	0.99	-	

※1 Measuring method of radiation symmetry

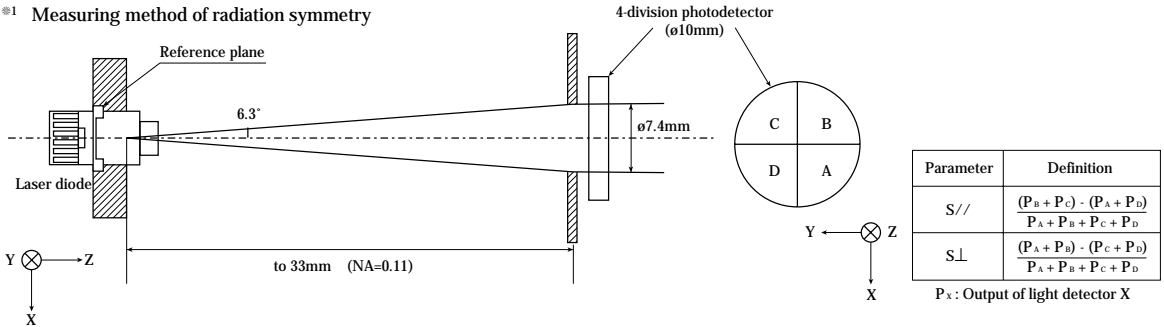

■

Electrical Characteristics of Monitor Photodiode (Design Standard*)

(GH7C605B5A)

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
※2 Sensitivity			S	V _R =15V	-	0.11	-	mA/mW
Dark current			I _D		-	-	150	nA
Terminal capacitance			C _t		-	4.2	-	pF

Parameter			Symbol	Conditions	MIN.	TYP.	MAX.	Unit
※2 Sensitivity			S	V _R =15V	-	0.07	-	mA/mW
Dark current			I _D		-	-	150	nA
Terminal capacitance			C _t		-	7.7	-	pF

※2 For hologram output power

■

Electro-optical Characteristics of OPIC for Signal Detection (Design Standard*)

(V_{CC}=5V, V_S=2.1V±5%, T_C=25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	※3 Segment
Supply voltage	V _{CC}		4.5	5	5.5	V	
Supply current	I _{CC}		7	10	13	mA	
Vs working voltage range	V _S		2.0	2.1	2.2	V	
※4 Output offset voltage	V _{OD}	No light	-25	0	25	mV	V _A , V _B , V _C
Offset voltage difference	ΔV _{OD}		-15	0	15	mV	V _E , V _F
			-25	0	25	mV	V _A -V _B
			-15	0	15	mV	V _E -V _F
Response frequency	f _{CRF}	※5 -3dB R _L =10k, C _L =10pF	40	70	-	MHz	V _{RF}
	f _{CF}		10	20	-	MHz	V _A , V _B , V _C
	f _{CR}		2	4	-	MHz	V _E , V _F
RF reference voltage	V _{RFO}	P _H =0mW No light	1.40	1.60	1.80	V	V _{RF}

※3 Applicable divisions correspond to output terminals.

D1	D4
D2	
D3	
D5	

Segment No.

D 1V _E
D 2V _A
D 3V _B
D 4V _C
D 5V _F

Output

※4 Difference from V_s

※5 Output amplitude=0dB (input signal 100kHz) BW=10kHz

* These parameters are not guaranteed performance, but general specifications of each optical element which makes up a hologram laser.

• Please refer to the chapter "Handling Precautions"

NOTICE

The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.

Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.

Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:

(i) The devices in this publication are designed for use in general electronic equipment designs such as:

- Personal computers
- Office automation equipment
- Telecommunication equipment [terminal]
- Test and measurement equipment
- Industrial control
- Audio visual equipment
- Consumer electronics

(ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:

- Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
- Traffic signals
- Gas leakage sensor breakers
- Alarm equipment
- Various safety devices, etc.

(iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:

- Space applications
- Telecommunication equipment [trunk lines]
- Nuclear power control equipment
- Medical and other life support equipment (e.g., scuba).

Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.

If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.

This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.

Contact and consult with a SHARP representative if there are any questions about the contents of this publication.