


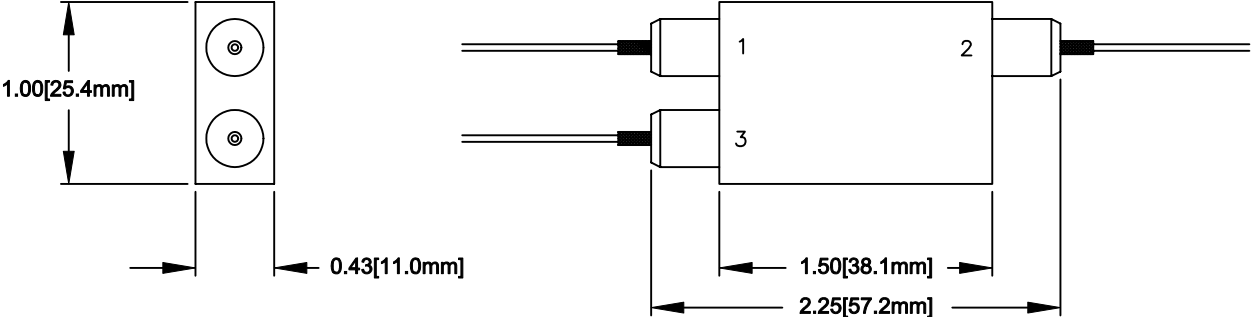

SPECIFICATIONS	
Center Wavelength (nm)	1550
Isolation (Peak dB)	>50
Isolation (Min. dB)	40
Insertion Loss (dB Typ.)	0.7
Insertion Loss (Max. dB)	1.5
Cross Talk (dB)	>60
Return Loss (dB)	>55
Bandwidth (nm)	±20
Polarization Dependent Loss (dB)	<0.15
Polarization Mode Dispersion(ps)	<0.1
Maximum Optical Power (mW)	200
Operating Temperature (°C)	0 to 60
Storage Temperature (°C)	-20 to 70

INFORMATION ONLY, NOT FOR MANUFACTURING

THORLABS

PO BOX 366
NEWTON NJ

TITLE

FIBER OPTIC CIRCULATOR, 1550nm

TOL: X.XXX $\pm$ 0.005 X.XX $\pm$ 0.010 ANGULAR $\pm$ 30'

MATERIAL

VARIOUS

WHERE USED

WEB
MECHANICAL
DRAWING

DRAWN

GM

ENGR.

JT

APPROVED

DATE

01/04/99

REV

A

SIZE

B

SHEET

1 OF 1

DWG NO.

1992-E0W

PART NO.

60-15-3