


ATTENUATORS



SMA, 5 Watts, DC - 6 GHz - 602 Series

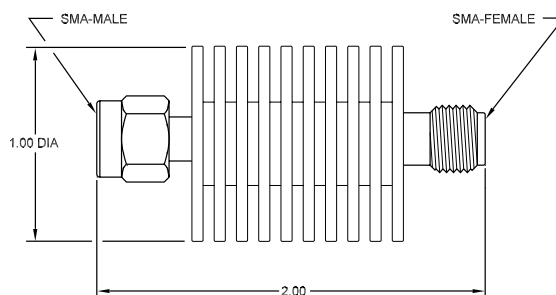

ELECTRICAL SPECIFICATIONS

Frequency:	DC - 6 GHz
VSWR (Max):	DC - 4 GHz : 1.15:1 4 - 6 GHz : 1.20:1
Impedance (Nom):	50 Ohms
Power (Avg):	5 Watts
Power (Peak):	500 Watts
Attenuation Accuracy:	3 - 6 dB: ± 0.30 dB 10 - 20 dB: ± 0.50 dB 30 dB: ± 0.75 dB

MECHANICAL SPECIFICATIONS

Connectors:	Stainless Steel, Passivated
Pin, Female:	BeCu, Gold Plated
Pin, Male:	BeCu, Gold Plated
Housing:	Aluminum, Black Anodized
Insulators:	Teflon, Virgin Elec. Grade
Temperature:	-55°C to +125°C
Weight:	10 Grams

Ordering Information

Typical Catalog Number: 602-XX-1

Available in values of 3, 6, 10, 20 & 30 dB.

To order or specify, insert attenuation value in place of XX. Example: 602-**10**-1 for 10 dB.