

HR1155PAS

InGaAs PIN Preamp

HITACHI

ADE-208-966A (Z)
Preliminary
2nd Edition
Nov. 2000

Description

The HR1155PAS is the single-ended output type receiver for 155 Mb/s 1.3 μm short and medium haul communication systems incorporated with InGaAs PIN photo diode and Si Preamp. Optical signal is launched into the non-hermetic Mini-DIL package through SMF pig tail.


Features

- Single mode fiber attached
- High sensitivity (-39 dBm typ)
- High overload immunity ($+1$ dBm min)
- Non-hermetic Mini-DIL package


Fiber Specifications

- Mode field diameter: 9.5 ± 1.0 μm
- Cutoff wavelength: 1.10 to 1.27 μm
- Outer diameter: 125 μm nominal
- Jacket diameter: 900 μm nominal
- Fiber minimum bend radius: 30 mm

Package Type
• HR1155PAS: PAS

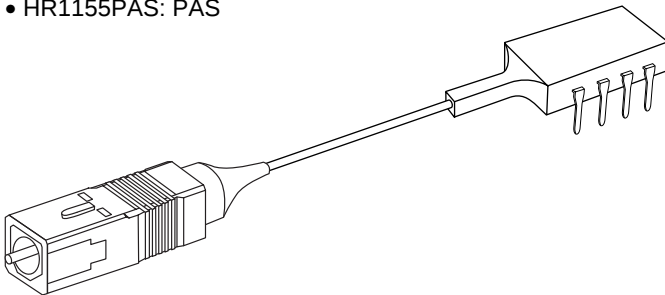

Internal Circuit (Top View)



Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Value	Unit	Condition
Operating temperature	Topr	−40 to +85	°C	
Storage temperature	Tstg	−40 to +85	°C	
Supply voltage	V _{cc}	−0.5 to +7	V	
Input power	P _o max	2	dBm	


Optical and Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Wavelength range	λ	1200	—	1400	nm	
Responsivity	Resp	0.7	0.83	—	A/W	V _{cc} = +5.0 V, V _{pd} = −5.2 V, λ = 1310 ± 5 nm, P _o = 100 μW
Transimpedance	T _z	11	15	20	kΩ	
Bandwidth	BW	93	—	210	MHz	V _{cc} = +5.0 V, V _{pd} = −5.2 V, P _o = −30 dBm, −3 dB, Z _I = 50 Ω, AC coupled
Sensitivity	Pr	−43	−39	−38	dBm	V _{cc} = +5.0 V, V _{pd} = −5.2 V, λ = 1310 ± 5 nm, Z _I = 50 Ω, AC coupled
Overload	Pmax	1	—	—	dBm	V _{cc} = +5.0 V, V _{pd} = −5.2 V, λ = 1310 ± 5 nm, Z _I = 50 Ω, AC coupled
Positive supply current	I _{cc}	10	—	63	mA	V _{cc} = +5.0 V, V _{pd} = −5.2 V, P _o = 0
Positive supply voltage	V _{cc}	4.7	5	5.3	V	Recommended V _{cc} value
Optical return loss	ORL	27	—	—	dB	

Pacage Dimensions

Preliminary

Unit: mm

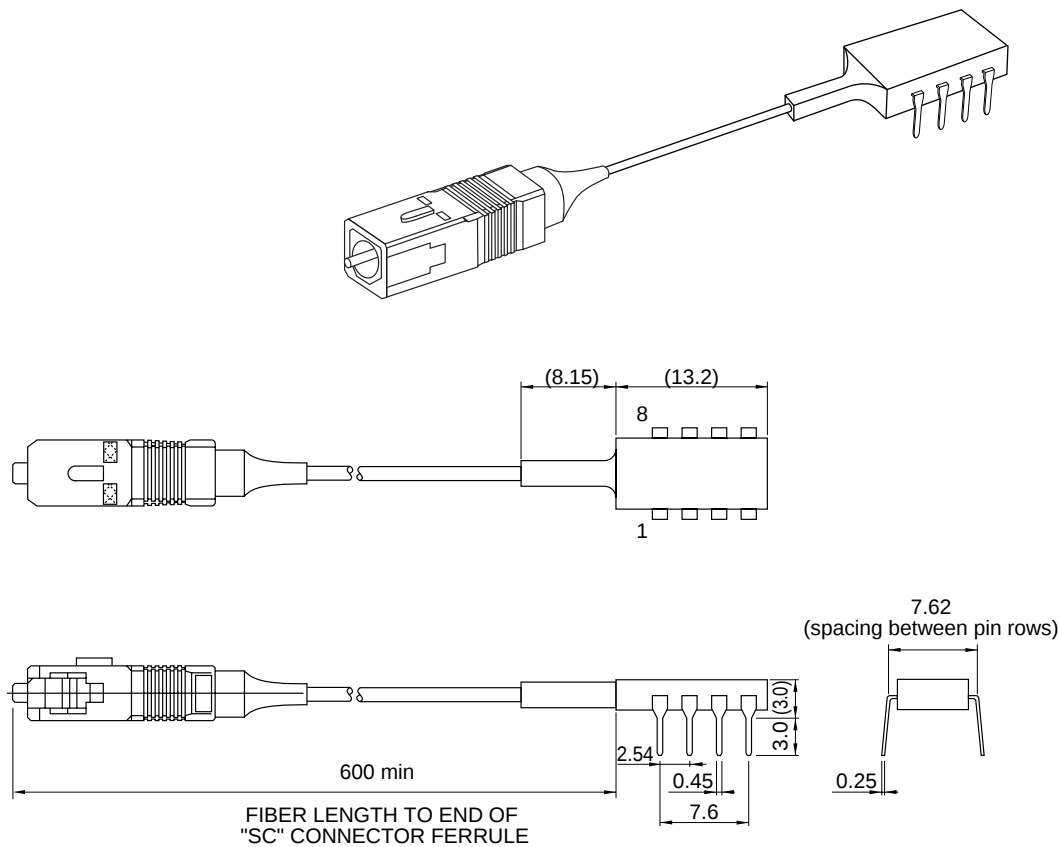

Hitachi Code	LD/PAS
JEDEC	—
EIAJ	—
Mass (reference value)	—

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
 5. This product is not designed to be radiation resistant.
 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
 7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.
1. The laser light is harmful to human body especially to eye no matter what directly or indirectly. The laser beam shall be observed or adjusted through infrared camera or equivalent.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.

Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	:	http://semiconductor.hitachi.com/
	Europe	:	http://www.hitachi-eu.com/hel/ecg
	Asia	:	http://sicapac.hitachi-asia.com
	Japan	:	http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor
(America) Inc.
179 East Tasman Drive,
San Jose, CA 95134
Tel: <1> (408) 433-1990
Fax: <1> (408) 433-0223

Hitachi Europe GmbH
Electronic Components Group
Dornacher Straße 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
Electronic Components Group.
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 585160

Hitachi Asia Ltd.
Hitachi Tower
16 Collyer Quay #20-00,
Singapore 049318
Tel: <65>-538-6533/538-8577
Fax: <65>-538-6933/538-3877
URL: <http://www.hitachi.com.sg>

Hitachi Asia Ltd.
(Taipei Branch Office)
4/F, No. 167, Tun Hwa North Road,
Hung-Kuo Building,
Taipei (105), Taiwan
Tel: <886>-(2)-2718-3666
Fax: <886>-(2)-2718-8180
Telex: 23222 HAS-TP
URL: <http://www.hitachi.com.tw>

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower,
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon,
Hong Kong
Tel: <852>-(2)-735-9218
Fax: <852>-(2)-730-0281
URL: <http://www.hitachi.com.hk>

Copyright © Hitachi, Ltd., 2000. All rights reserved. Printed in Japan.
Colophon 2.0

HITACHI