
HA22033

GaAs MMIC
Low Noise Amplifier for Micro Wave Application

HITACHI


ADE-207-266 (Z)
1st. Edition
October 1998

Features

- Suitable for low noise amplifier of Micro Wave Application(1.5 to 1.9GHz)
- Low voltage and low current operation (2.7V, 1.7mA typ.)
- Low noise (1.4 dB typ. @1.5GHz)
- High power gain (14 dB typ. @1.5GHz)
- Built-in matching circuits (50Ω)
- Small surface mount package (MPAK-5)

Outline

MPAK-5



This document may, wholly or partially, be subject to change without notice.

This Device is sensitive to Electro Static Discharge.
An Adequate handling procedure is requested.

CAUTION

This product uses GaAs. Since dust or fume of GaAs is highly poisonous to human body, please do not treat them mechanically in the manner which might expose to the Air. And it should never be thrown out with general industrial or domestic wastes.

HA22033

Absolute Maximum Ratings (Ta = 25°C)

| Item | Symbol | Ratings | Unit |
|-----------------------|---------|-------------|------|
| Supply voltage | Vdd | 5 | V |
| Maximum current | Idd | 6 | mA |
| Power dissipation | Pd | 100 | mW |
| Channel temperature | Tch | 150 | °C |
| Storage temperature | Tstg | −55 to +125 | °C |
| Operation temperature | Topr | −20 to +70 | °C |
| Maximum input power | Pin max | +15 | dBm |


Electrical Characteristics (Ta = 25°C, Vdd = 2.7V)

| Item | Symbol | Min | Typ | Max | Unit | Test Conditions | Pin |
|-------------------|--------|-----|-----|-----|------|-----------------|-----|
| Quiescent current | Idd | — | 1.7 | 2.5 | mA | No signal | |
| Power gain | PG | 12 | 14 | — | dB | f = 1.5 GHz | |
| Noise figure | NF | — | 1.4 | 2 | dB | f = 1.5 GHz | |

Typical Performance (Ta = 25°C, Vdd = 2.7V)


| Item | Symbol | Typ | Unit | Test Conditions | Pin |
|--------------------------------------|----------|-----|------|----------------------------|-----|
| VSWR (input) | VSWR in | 1.5 | — | f = 1.5 GHz | 4 |
| VSWR (output) | VSWR out | 2.2 | — | f = 1.5 GHz | 1 |
| 3rd order intermodulation distortion | IM3 | 50 | dB | f = 1.5 GHz, Pin = −30 dBm | |

Block Diagram

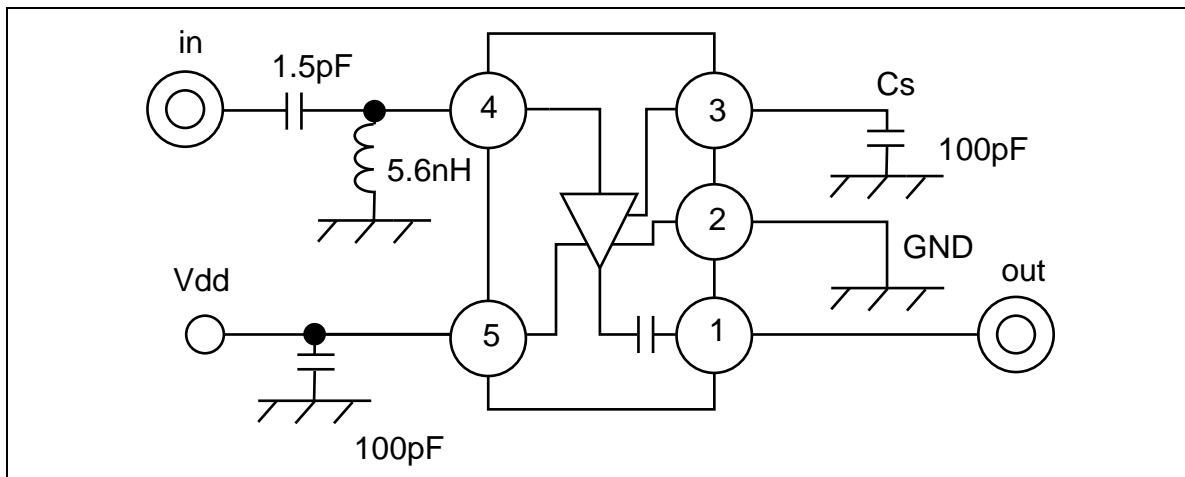


HA22033

Pin Arrangement




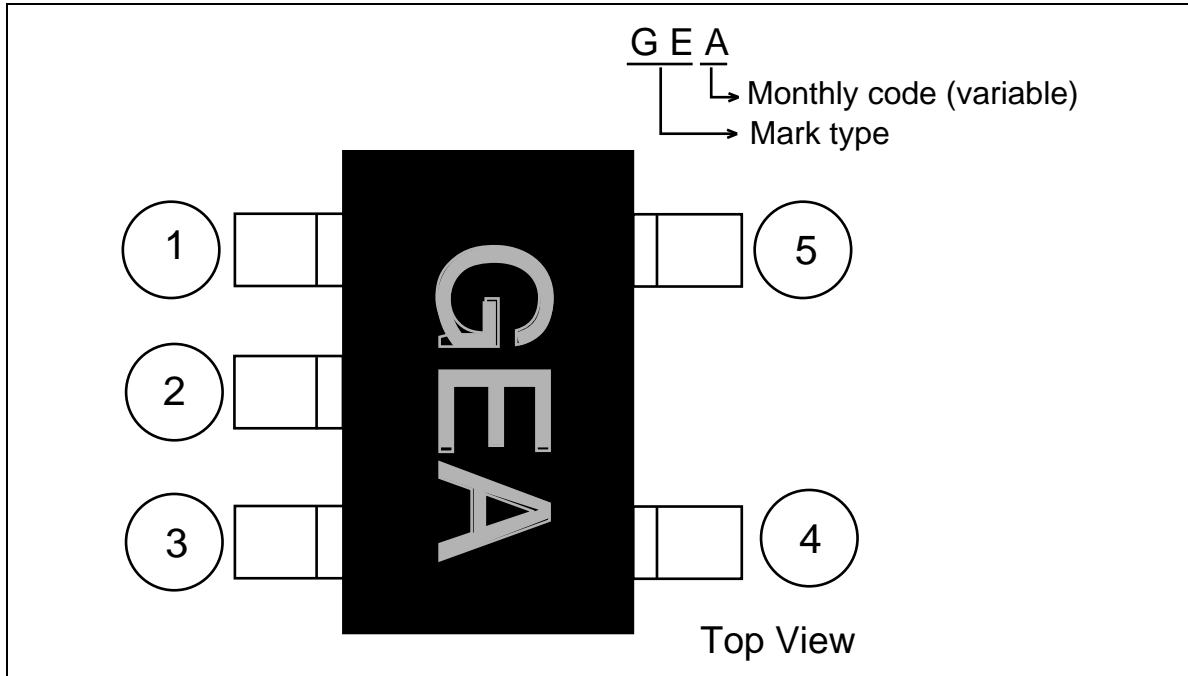






| Pin No. | Pin name | Function |
|---------|----------|----------------------------|
| 1 | RF out | RF output |
| 2 | GND | Ground |
| 3 | Cs | Bypass capacitor (>100 pF) |
| 4 | RF in | RF input |
| 5 | Vdd | Power supply |





Pattern Layout


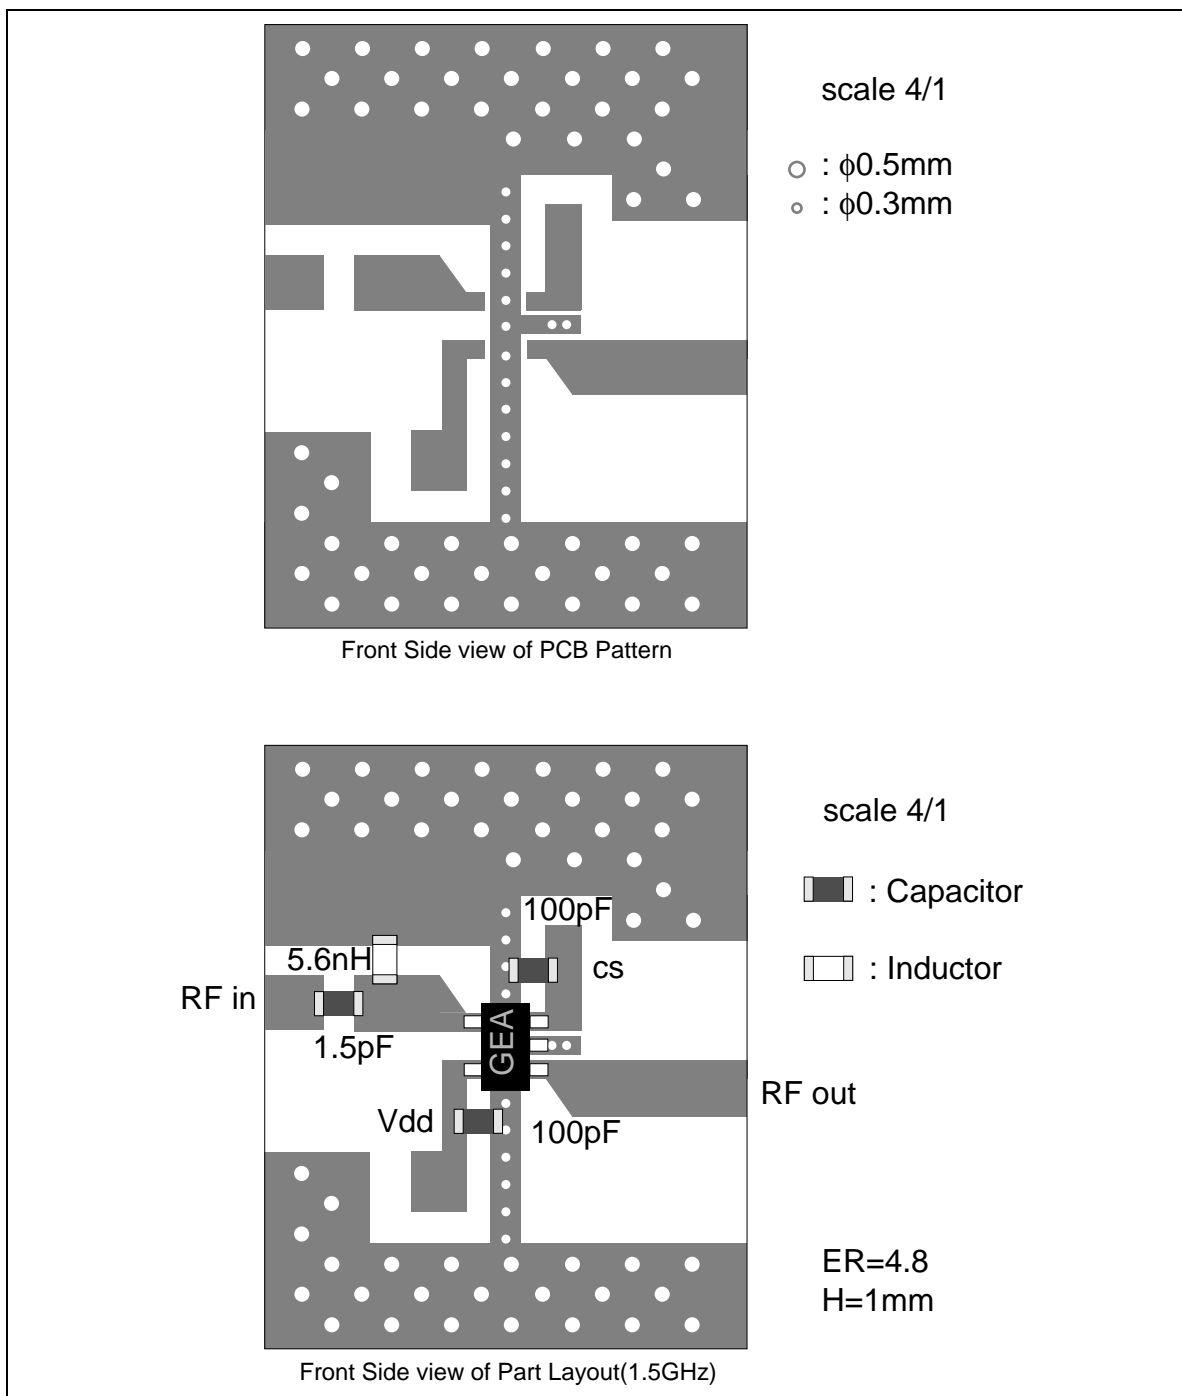


Main Characteristics

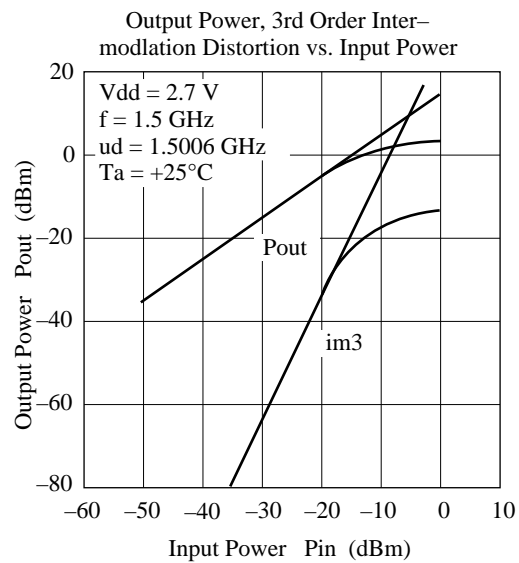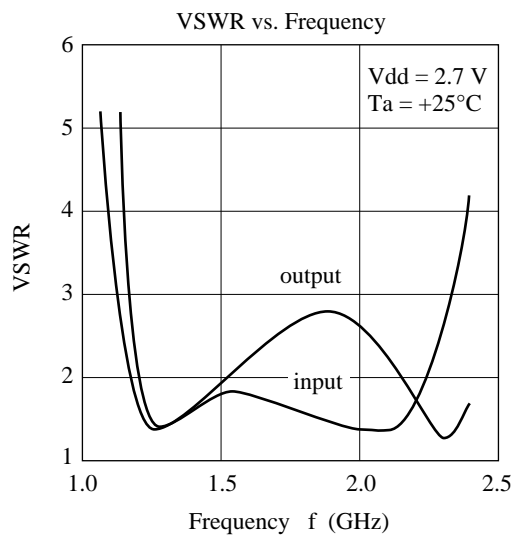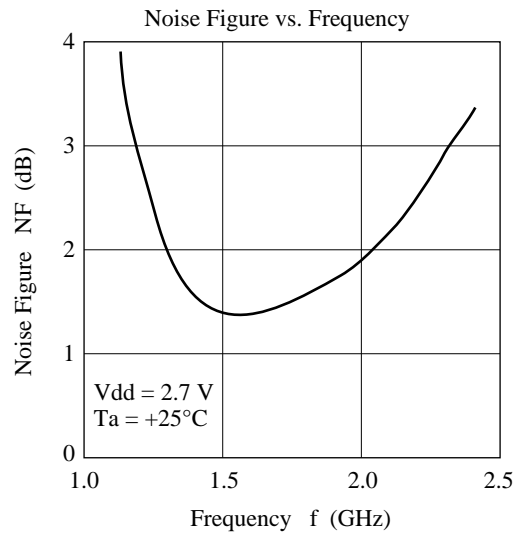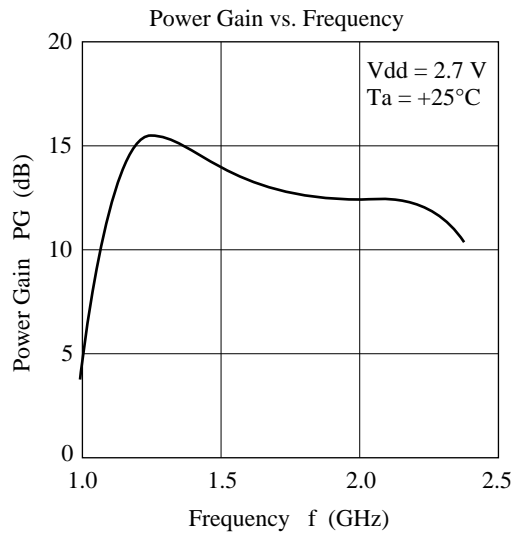

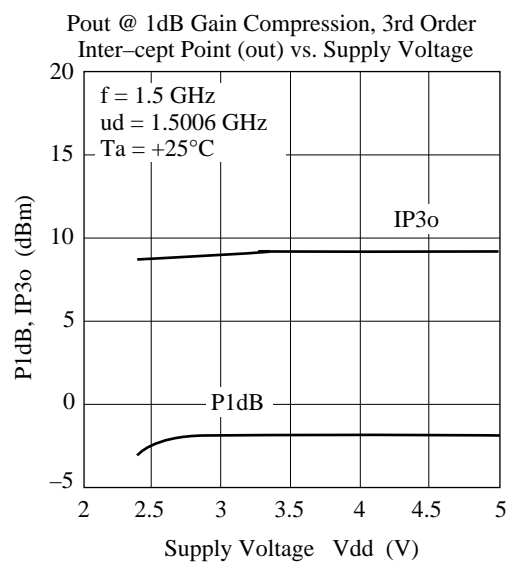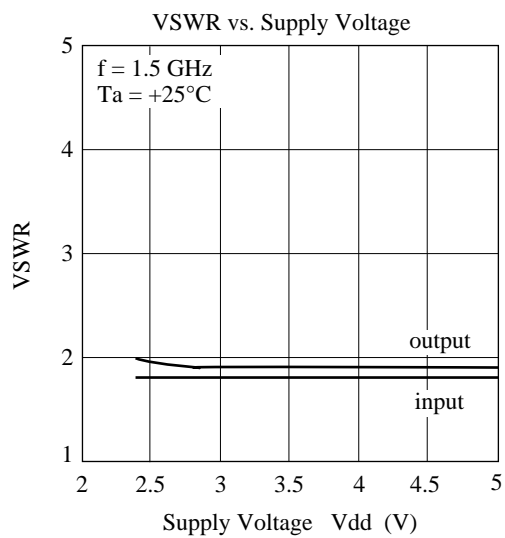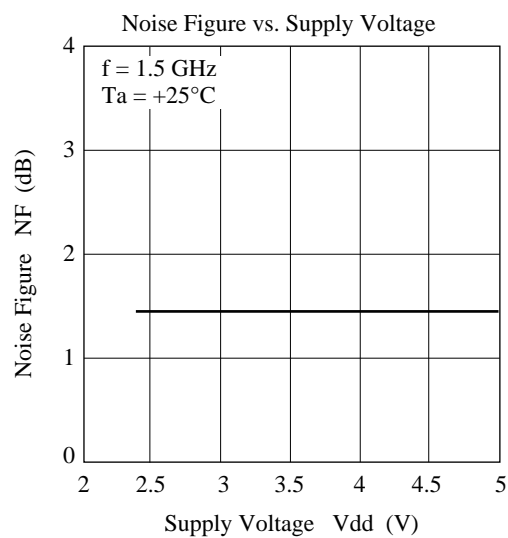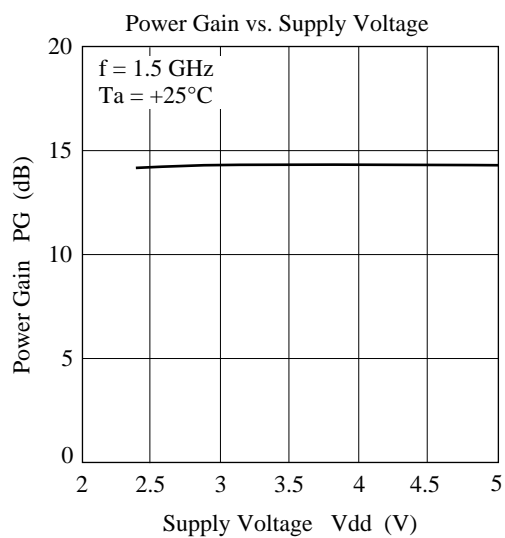

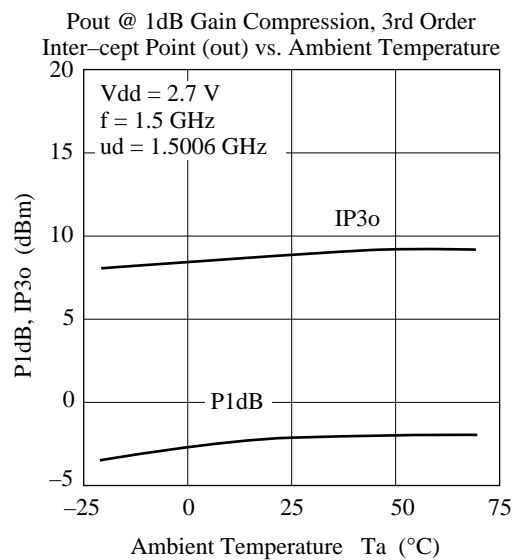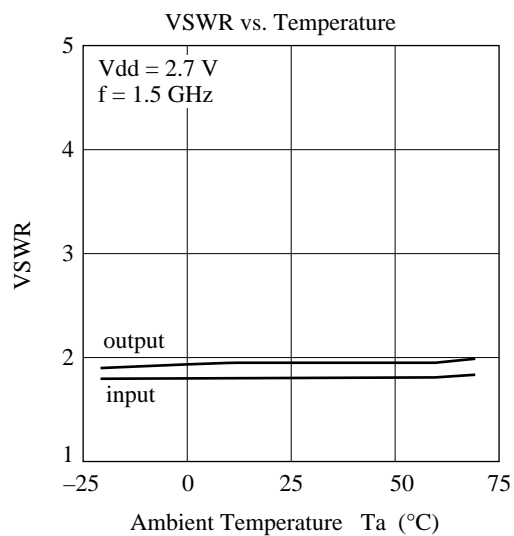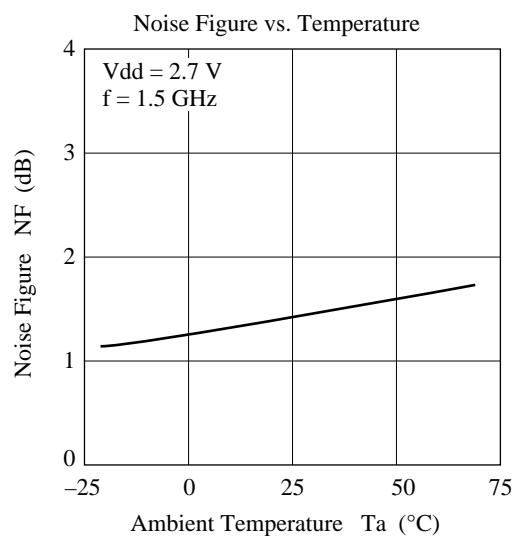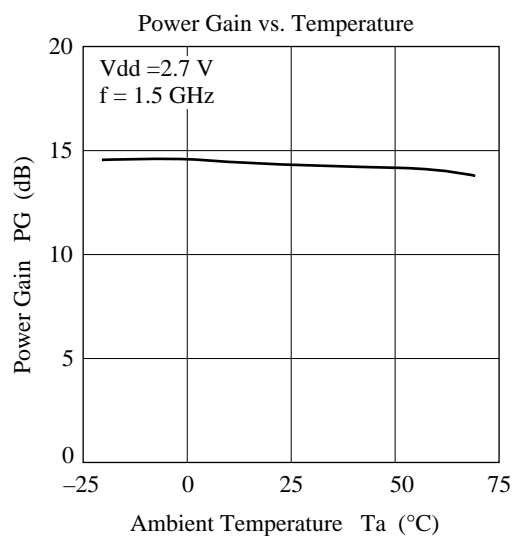


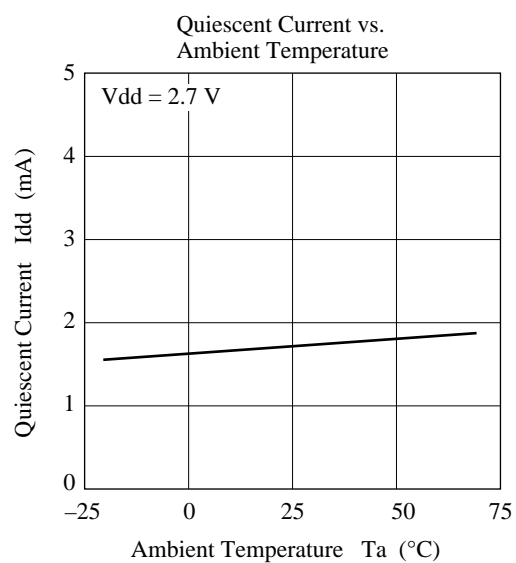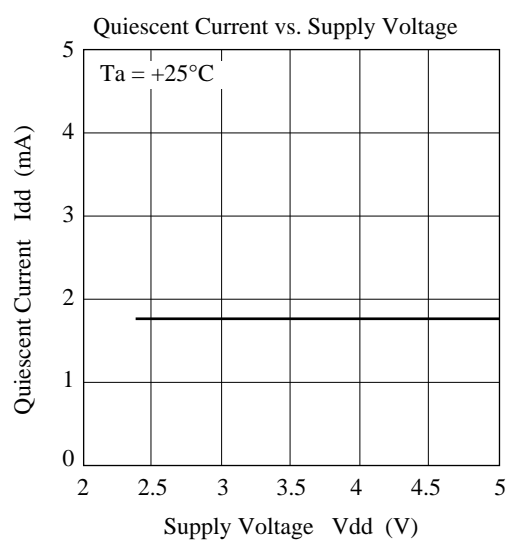

HA22033

Package Dimentions

Unit: mm

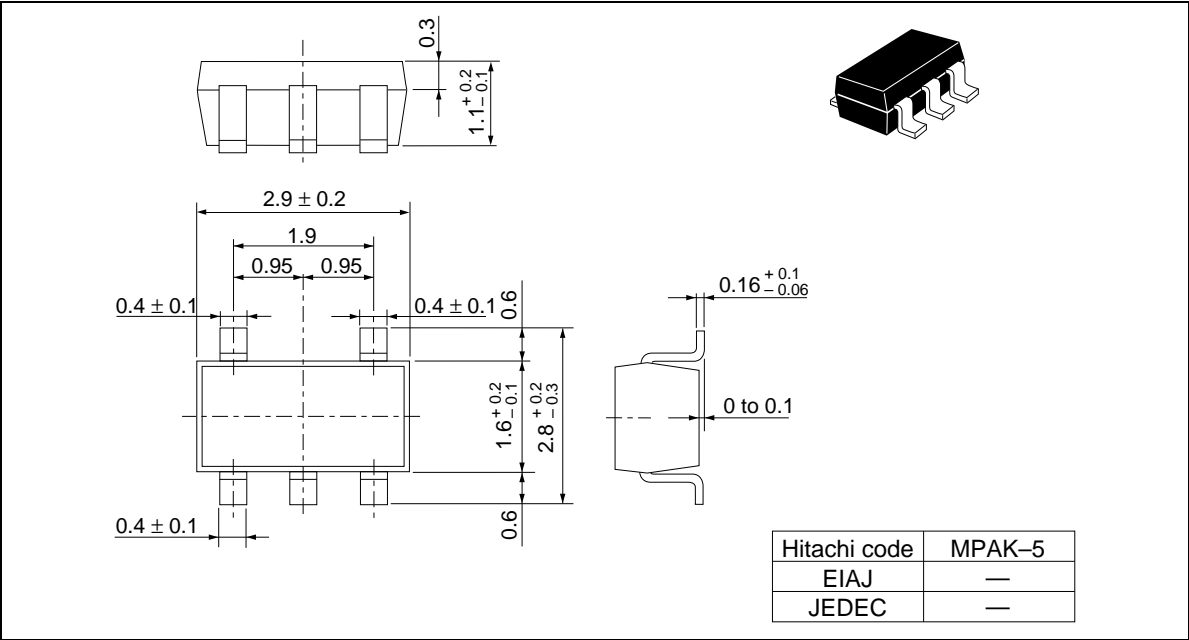

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

1. This product must not be placed in the mouth, as it contains toxic substances that may cause poisoning. If by chance the product is placed in the mouth, take emergency action such as inducing vomiting, then consult a physician without delay.
2. Disposal of this product must be handled, separately from other general refuse, by a specialist processing contractor in the same way as dangerous items.