

Disc Ceramic Capacitors



Professional Ceramic Capacitors - Class I, II and III

MIL-STD-202F

The professional ceramic disc capacitors were specially developed for applications in severe environmental conditions, high humidity, temperature, gas, vapor and solvents.

The capacitors are flame retardant epoxy coated, meeting UL 94-V0 flammability specifications. The capacitors are 100% screened on following electrical parameters:

Capacitance, loss factor, test voltage. After the 100% test, the capacitors are audited on its electrical and mechanical parameters with following AQL:

Electrical parameters: 0.065% level II

Mechanical parameters: 0.65% level II

The capacitors withstand the following reliability essays:

Terminal strength: method 211 – condition A

Resistance to solvents: method 215

Resistance to soldering heat: method 210 – condition B


Solderability: method 208

Thermal shock: method 107 – condition A

Humidity (steady state): method 103 – condition D

Life (at elevated ambient temperature): method 108 – condition D

Operating temperature and storage: -55... +125° C

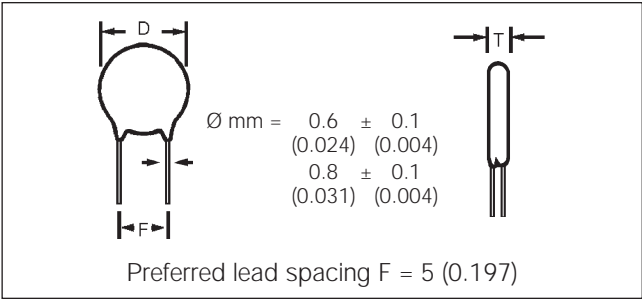

millimeters (inches)

| Lead Spacing | Digit 8 | |
|--------------|---------|---|
| F | | |
| 2.5 (0.100) | D | — |
| 5 (0.200) | A | O |
| 6 (0.250) | E | X |
| 7.5 (0.300) | B | R |
| 10 (0.400) | C | W |

DIMENSIONS

millimeters (inches)

| Digit 9 (ø) | D ± 2 (0.079) | T max. | Available Lead Spacing |
|---------------------------------|---------------|-------------|------------------------|
| A $\frac{NP0}{1pF...2.7pF}$ | 4.0 (0.157) | 3.0 (0.118) | A,B,D,E,O,R |
| A $\frac{N1500}{5.6pF...8.2pF}$ | 4.0 (0.157) | 3.0 (0.118) | A,B,D,E,O,R |
| A Others | 4.0 (0.157) | 3.0 (0.118) | A,B,D,E,O,R |
| B | 5.0 (0.197) | 3.0 (0.118) | A,B,D,E,O,R,X |
| C | 6.0 (0.236) | 3.0 (0.118) | A,B,C,D,E,O,R,X |
| D | 7.0 (0.276) | 3.0 (0.118) | A,B,C,D,E,O,R,X |
| E | 8.0 (0.315) | 3.0 (0.118) | A,B,C,D,E,O,R,X |
| F | 9.0 (0.354) | 3.0 (0.118) | A,B,C,E,O,R,X |
| G | 10.0 (0.394) | 3.0 (0.118) | A,B,C,E,O,R,X |
| H | 11.0 (0.433) | 3.0 (0.118) | A,B,C,E,O,R,W |
| J | 13.0 (0.512) | 3.5 (0.138) | B,C,R,W |
| K | 15.0 (0.591) | 3.5 (0.138) | B,C,R,W |
| M | 19.0 (0.748) | 4.0 (0.157) | B,C |

(E), (X), (W): upon request

Disc Ceramic Capacitors

Dimension Table - Class II

Low and Medium Voltage Professional



DIELECTRIC - CLASS II

These ceramic capacitors have a high dielectric constant, making possible high capacitance values in reduced dimensions, however temperature coefficient and loss factor are greater than Class I.

Typical applications are decoupling and by pass.

100V AND 500V PERFORMANCE CHARACTERISTICS CLASS II

| | | | |
|-----------------------|---|---|--|
| Measured at | 1.0 kHz / 0.3 Vrms / 25°C | Dielectric Strength | $V_R = 100V \rightarrow V_t = 250V$ (DC) $V_R = 500V \rightarrow V_t = 1250V$ (DC) Between leads and body insulation |
| Dissipation Factor | X5E / X5F / X5P $\rightarrow \leq 2.5\%$ X5U / X5V / Z5V $\leq 3.0\%$ | NOTE: Charging current limited to 50 mA | |
| Capacitance Tolerance | X5E / X5F / X5P $\rightarrow \pm 10\%$ X5U / X5V / Z5V $\rightarrow -20 +50\%$ X5E / X5F / X5P / X5U $\rightarrow \pm 20\%$ | Operating Temperature Range (°C) | -55... +125 Epoxy Coated |
| Insulation Resistance | @ $V_R \rightarrow \geq 10 G\Omega$ | Climatic Category | 55 / 085 / 56 |

Note: Damp Heat Steady State: 90... 95% R.H. 40°C / 56 days. No voltage to be applied.

DIMENSION TABLE - CLASS II LOW AND MEDIUM VOLTAGE PROFESSIONAL

100V / 500V CLASS II EPOXY COATED

millimeters (inches)

| Temp. Coefficient | X5E | | X5F | | X5P | | X5U | | X5V | | Z5V |
|-------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|--------------|-------------|
| Digits 1,2,3 of P.N. | 6MK | 6MQ | 6NK | 6NQ | 6OK | 6OQ | 6SK | 6SQ | 6TK | 6TQ | 6UK |
| Rated Voltage (V_R) | 100 VDC | 500 VDC | 100 VDC | 500 VDC | 100 VDC | 500 VDC | 100 VDC | 500 VDC | 100 VDC | 500 VDC | 100 VDC |
| C_R (pF) | | | | | | | | | | | |
| 56 | 4.0 (0.157) | 4.0 (0.157) | Use X5E | Use X5E | Use X5E | Use X5E | Use X5E | Use X5E | Use X5E | Use X5E | Use X5E |
| 68 | | | | | | | | | | | |
| 82 | | | | | | | | | | | |
| 100 | | | | | | | | | | | |
| 120 | | | | | | | | | | | |
| 150 | | | | | | | | | | | |
| 180 | | | | | | | | | | | |
| 220 | | | | | | | | | | | |
| 270 | 5.0 (0.197) | 5.0 (0.197) | 4.0 (0.157) | 4.0 (0.157) | Use X5F | Use X5F | Use X5F | Use X5F | Use X5F | Use X5F | Use X5F |
| 330 | | | | | | | | | | | |
| 390 | | | | | | | | | | | |
| 470 | | | | | | | | | | | |
| 560 | | | | | | | | | | | |
| 680 | | | | | | | | | | | |
| 820 | | | | | | | | | | | |
| 1,000 | | | | | | | | | | | |
| 1,200 | 8.0 (0.315) | 8.0 (0.315) | 6.0 (0.236) | 8.0 (0.315) | 5.0 (0.197) | 6.0 (0.236) | 4.0 (0.157) | 4.0 (0.157) | Use X5U | Use X5U | Use X5U |
| 1,500 | | | | | | | | | | | |
| 1,800 | | | | | | | | | | | |
| 2,200 | | | | | | | | | | | |
| 2,700 | | | | | | | | | | | |
| 3,300 | | | | | | | | | | | |
| 3,900 | | | | | | | | | | | |
| 4,700 | | | | | | | | | | | |
| 5,600 | 9.0 (0.354) | 9.0 (0.354) | 7.0 (0.276) | 9.0 (0.354) | 8.0 (0.315) | 7.0 (0.276) | 5.0 (0.197) | 6.0 (0.236) | 4.0 (0.157) | 4.0 (0.157) | Use X5V |
| 6,800 | | | | | | | | | | | |
| 8,200 | | | | | | | | | | | |
| 10,000 | | | | | | | | | | | |
| 12,000 | | | | | | | | | | | |
| 15,000 | | | | | | | | | | | |
| 22,000 | | | | | | | | | | | |
| | 11.0 (0.433) | 15.0 (0.591) | 8.0 (0.315) | 11.0 (0.433) | 8.0 (0.315) | 9.0 (0.354) | 6.0 (0.236) | 7.0 (0.276) | 5.0 (0.197) | 5.0 (0.197) | 4.0 (0.157) |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | 13.0 (0.512) | 15.0 (0.591) | 11.0 (0.433) | 13.0 (0.512) | 13.0 (0.512) | 15.0 (0.591) | 7.0 (0.276) | 9.0 (0.354) | 6.0 (0.236) | 7.0 (0.276) | 4.0 (0.157) |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | 15.0 (0.591) | 15.0 (0.591) | 13.0 (0.512) | 15.0 (0.591) | 13.0 (0.512) | 15.0 (0.591) | 9.0 (0.354) | 11.0 (0.433) | 8.0 (0.315) | 9.0 (0.354) | 5.0 (0.197) |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | 17.0 (0.669) | 15.0 (0.591) | 15.0 (0.591) | 15.0 (0.591) | 15.0 (0.591) | 15.0 (0.591) | 11.0 (0.433) | 13.0 (0.512) | 9.0 (0.354) | 11.0 (0.433) | 8.0 (0.315) |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |


Diameter (φ) = 9th Part Number Digit

Disc Ceramic Capacitors



Ordering Code

HOW TO ORDER

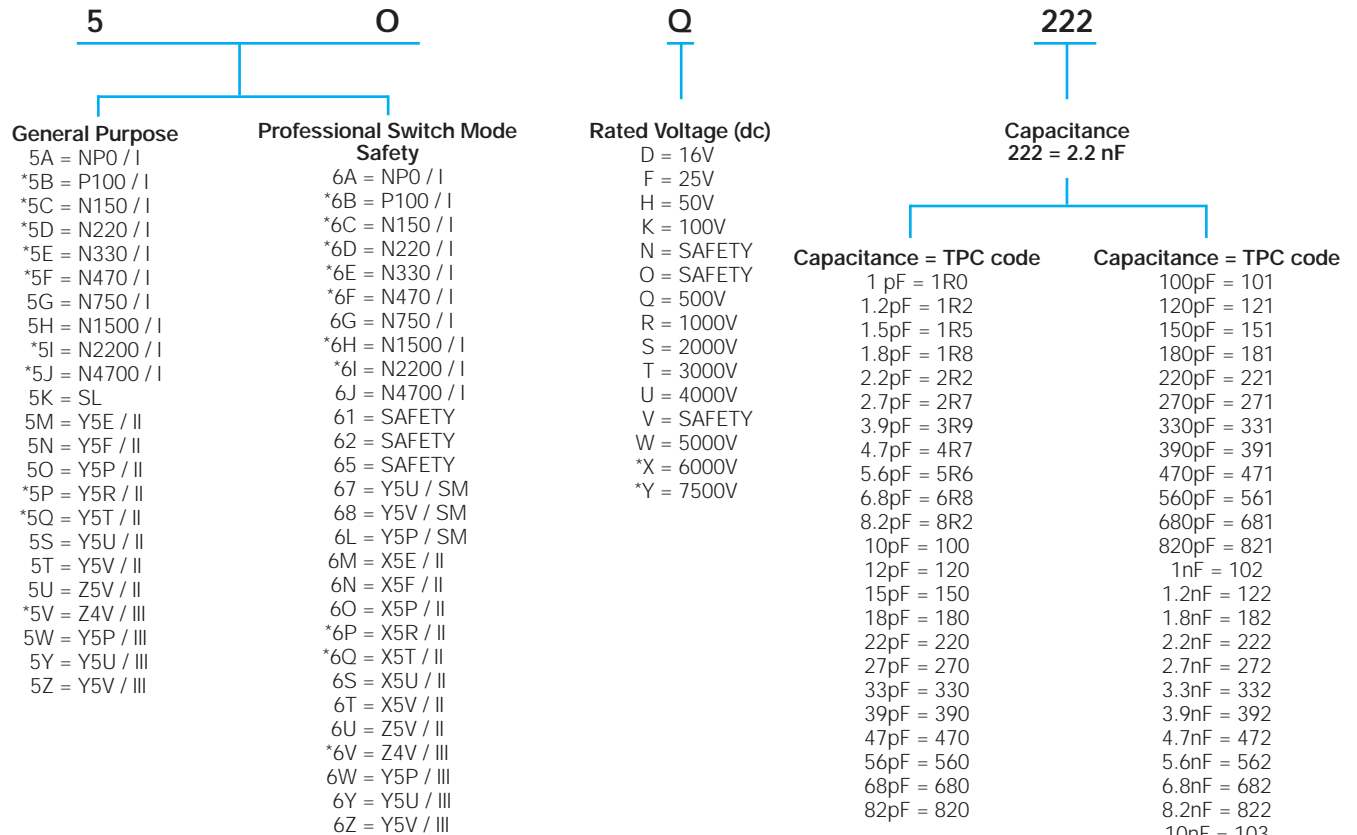

*Upon Request

Disc Ceramic Capacitors

Ordering Code



M

Tolerance
 C = ± 0.25 pF
 D = ± 0.50 pF
 J = $\pm 5\%$
 K = $\pm 10\%$
 M = $\pm 20\%$
 S = -20+50%
 Z = -20+80%
 P = 0+100%

A

**Capacitor Diameter
 ± 2 (0.079)**
 A = 4 (0.157)
 B = 5 (0.197)
 C = 6 (0.236)
 D = 7 (0.276)
 E = 8 (0.315)
 F = 9 (0.354)
 G = 10 (0.394)
 H = 11 (0.433)
 J = 13 (0.512)
 K = 15 (0.591)
 M* = 19 (0.748)


*Wire 0.8 (0.031) recommended

A

A

Packaging

Cardboard Strips



Bulk

E = 5 (0.197) ± 1 (0.039) free wire length
 C = 10 (0.394) ± 1 (0.039) free wire length
 D = 25 (0.984) ± 1 (0.039) free wire length

Taping

Reel



| Avisert | | | Panaset | | |
|---------|---|---|---------|---|---|
| | | | | | |
| H | L | L | J | L | L |




| Avisert | | | Panaset | | |
|---------|---|---|---------|---|---|
| | | | | | |
| I | M | M | K | M | M |

| Lead Forming | | | | |
|---|----------------|---|---|---|
| mm | inches | | | |
| 2.5 ± 0.5 | .1 $\pm .025$ | D | - | - |
| 5 $\begin{smallmatrix} +0.6 \\ -0.2 \end{smallmatrix}$ | .2 $\pm .025$ | A | O | N |
| 6 $\begin{smallmatrix} +0.6 \\ -0.2 \end{smallmatrix}$ | .25 $\pm .025$ | E | X | - |
| 7.5 $\begin{smallmatrix} +1 \\ -0.5 \end{smallmatrix}$ | .3 $\pm .05$ | B | R | Q |
| 10 $\begin{smallmatrix} +0.5 \\ -1.0 \end{smallmatrix}$ | .4 $\pm .05$ | C | W | - |
| 12.5 $\begin{smallmatrix} +1 \\ -0.5 \end{smallmatrix}$ | .5 $\pm .05$ | P | - | - |


Finishing

Diam ≤ 9 (0.354) and
 F = 5.00 (0.197)



Coating does not
 surpass the bend

For every other:




Low Voltage

A = Phenolic (General Purpose) Q = Waxed phenolic

S = Epoxy (Professional) cap. diameter
 ≤ 8 (0.315)

D = Epoxy (Professional) cap. diameter
 > 8 (0.315)

High Voltage



F = Measured
 from the
 center of
 leads

C = Epoxy wire diameter $\begin{smallmatrix} 0.6 \\ (0.024) \end{smallmatrix} \pm \begin{smallmatrix} 0.1 \\ (0.004) \end{smallmatrix}$

I = Epoxy wire diameter $\begin{smallmatrix} 0.8 \\ (0.031) \end{smallmatrix} \pm \begin{smallmatrix} 0.1 \\ (0.004) \end{smallmatrix}$

L = Phenolic wire diameter $\begin{smallmatrix} 0.6 \\ (0.024) \end{smallmatrix} \pm \begin{smallmatrix} 0.1 \\ (0.004) \end{smallmatrix}$

Please note that not all code combinations
 are either possible or available.

Disc Ceramic Capacitors




Marking

| DIG. 2 | | Logo: Only in diam. ≥ 6mm | Capacitance | | EIA |
|-----------------|---------------|---------------------------|-------------|-------------|-------------|
| O | | | | | |
| TC / Class | | | | | |
| General Purpose | Professional | | | | |
| A = NP0 / I | A = NP0 / I | | 1pF = 109 | | 100pF = 101 |
| *B = P100 / I | B = P100 / I | | 1.2pF = 129 | | 120pF = 121 |
| *C = N150 / I | C = N150 / I | | 1.5pF = 159 | | 150pF = 151 |
| *D = N220 / I | D = N220 / I | | 1.8pF = 189 | | 180pF = 181 |
| *E = N330 / I | E = N330 / I | | 2.2pF = 229 | | 220pF = 221 |
| *F = N470 / I | F = N470 / I | | 2.7pF = 279 | | 270pF = 271 |
| G = N750 / I | G = N750 / I | | 3.9pF = 399 | | 390pF = 391 |
| H = N1500 / I | H = N1500 / I | | 4.7pF = 479 | | 470pF = 471 |
| *I = N2200 / I | I = N2200 / I | 5.6pF = 569 | | 560pF = 561 | |
| *J = N4700 / I | J = N4700 / I | 6.8pF = 689 | | 680pF = 681 | |
| | | 8.2pF = 829 | | 820pF = 821 | |
| K = SL | 7 = Y5U / SM | 10pF = 100 | | 1nF = 102 | |
| M = Y5E / II | 8 = Y5V / SM | 12pF = 120 | | 1.2nF = 122 | |
| N = Y5F / II | L = Y5P / SM | 15pF = 150 | | 1.8nF = 182 | |
| O = Y5P / II | M = X5E / II | 18pF = 180 | | 2.2nF = 222 | |
| P = Y5R / II | N = X5F / II | 22pF = 220 | | 2.7nF = 272 | |
| Q = Y5T / II | O = X5P / II | 27pF = 270 | | 3.9nF = 392 | |
| S = Y5U / II | P = X5R / II | 39pF = 390 | | 4.7nF = 472 | |
| T = Y5V / II | Q = X5T / II | 47pF = 470 | | 5.6nF = 562 | |
| U = Z5V / II | R = X5U / II | 56pF = 560 | | 6.8nF = 682 | |
| V = Z4V / III | S = X5V / II | 68pF = 680 | | 8.2nF = 822 | |
| *W = Y5P / II | T = X5V / II | 82pF = 820 | | 10nF = 103 | |
| *X = Y5R / II | U = Z5V / II | | | 15nF = 153 | |
| Y = Y5U / II | V = Z4V / III | | | 22nF = 223 | |
| Z = Y5V / II | W = Y5P / III | | | 33nF = 333 | |
| | X = Y5R / III | | | 47nF = 473 | |
| | Y = Y5U / III | | | 100nF = 104 | |
| | Z = Y5V / III | | | 200nF = 204 | |

*Upon Request

TC – Temperature coefficient.

DIG – for better understanding, check pages 3 and 4.

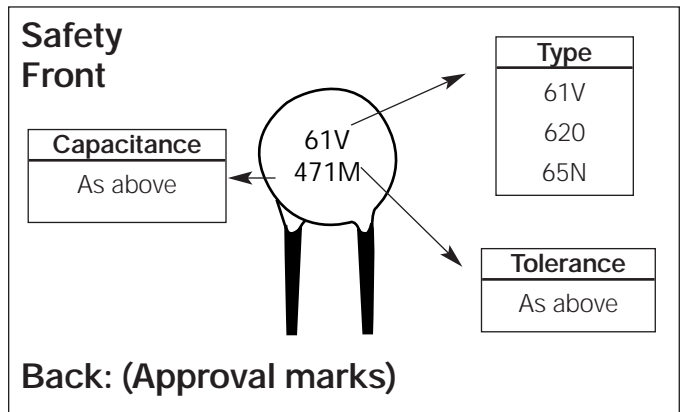


Disc Ceramic Capacitors



Packaging

IDENTIFICATION AND TRACEABILITY

On all TPC ceramic capacitors packages, you will find a bar code label with the following information:

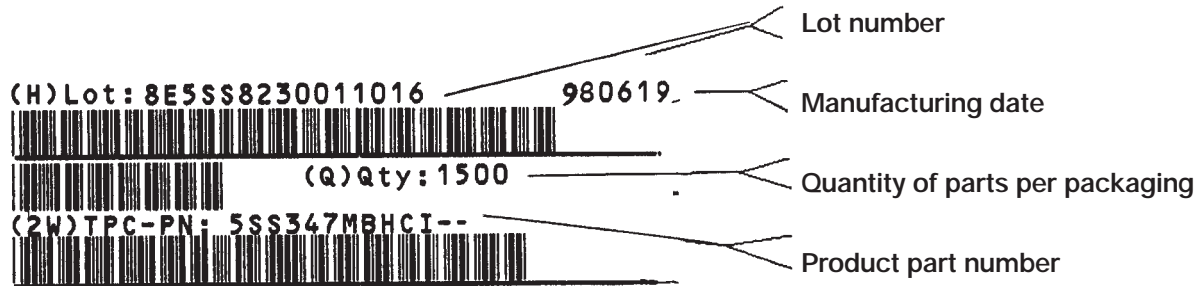

TAPED PARTS QUANTITY TABLE

millimeters (inches)

| Rated Voltage | Diameter | Quantities | |
|-----------------|--------------------|------------|------|
| (Vr) | D | Ammopack | Reel |
| Vr ≤ 500V | D ≤ 7 (0.276) | 2000 | 2500 |
| | 7 < D ≤ 11 (0.433) | 2000 | 2000 |
| 500V < Vr ≤ 2KV | D ≤ 11 (0.433) | 1500 | 2000 |
| 2KV < Vr ≤ 5KV | D ≤ 11 (0.433) | 1000 | 1500 |

CARDBOARD STRIPS QUANTITY TABLE

millimeters (inches)

| Rated Voltage | Diameter | Lead Space | |
|-----------------|-----------------------------|---------------|-------------|
| (Vr) | D | < = 5 (0.197) | > 5 (0.197) |
| Vr ≤ 500V | D ≤ 8 (0.315) | 2500 | 1500 |
| | 8 (0.315) ≤ D ≤ 11 (0.433) | 1500 | - |
| | 8 (0.315) ≤ D ≤ 13 (0.512) | - | 1000 |
| | 11 (0.433) ≤ D ≤ 15 (0.591) | 1000 | - |
| | 13 (0.512) ≤ D ≤ 19 (0.748) | - | 500 |
| | D ≤ 19 (0.748) | 500 | - |
| 500V < Vr ≤ 2KV | D ≤ 9 (0.354) | 1500 | 1000 |
| | 9 (0.354) ≤ D ≤ 11 (0.433) | - | 1000 |
| | 9 (0.354) ≤ D ≤ 13 (0.512) | 1000 | - |
| | 11 (0.433) ≤ D ≤ 19 (0.748) | - | 500 |
| | 13 (0.512) ≤ D ≤ 19 (0.748) | 500 | - |
| 2KV < Vr ≤ 5KV | D ≤ 9 (0.354) | 1500 | - |
| Safety 65N 62O | D ≤ 11 (0.433) | - | 1000 |
| | D ≤ 13 (0.512) | 500 | 500 |
| Safety | D ≤ 6 (0.236) | 1500 | 1500 |
| 61V | 7 (0.275) ≤ D ≤ 9 (0.354) | 1000 | 1000 |
| | 9 (0.354) ≤ D | 500 | 500 |

Quantities for other package alternative, upon request.


Disc Ceramic Capacitors



Tape and Reel Specifications

There are two types of taped disc ceramic capacitors:
Straight or crimped leads.

Both types can be shipped on reels or ammpack.
The standard packaging quantities are shown below:

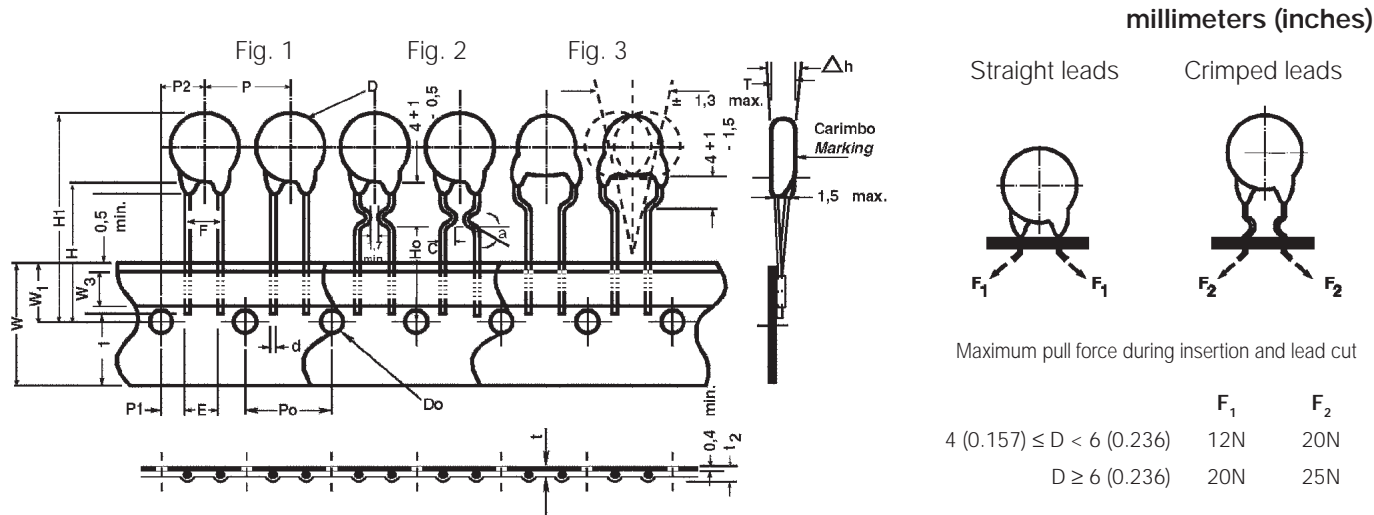

| Digit 11 | Available Tapings | | Digit 9 |
|----------|-------------------|--|---------|
| L | → | Sizes $4 (0.157) \leq D \leq 11 (0.433)$ | A... H |
| M | | | |
| J H | → | Sizes $6 (0.236) \leq D \leq 11 (0.433)$ | C... H |
| K I | | | |

TPC Code Digit 11

| Packaging | Avisert | Panasert |
|-------------|---|---|
| Reel | H FIGURE 1 L FIGURE 2 L FIGURE 3 | J FIGURE 1 L FIGURE 2 L FIGURE 3 |
| Ammpack | I FIGURE 1 M FIGURE 2 M FIGURE 3 | K FIGURE 1 M FIGURE 2 M FIGURE 3 |

Figure 2: Inside Crimp 100V... 1000V

Figure 3: Outside Crimp 1000V

Disc Ceramic Capacitors




Tape and Reel Specifications

millimeters (inches)

| Description of Symbols | | Straight Leads | | Crimped |
|--|------------|----------------------|---|-------------------|
| | | Figure 1 | | Figure 2 & 3 |
| | | A (Avisert) | P (Panaset) | Avisert & Panaset |
| Crimp angle | ∞ | — | — | 20°...45° |
| Crimp length | C | — | — | 1.7 min. |
| Lead diameter | d | 0.60 ± 0.1 | | |
| Disc diameter | D | 11 max. | | |
| Lead hole diameter | Do | 4.0 ± 0.2 | | |
| Disc thickness | T | See Catalog | | |
| Lead spacing | F | 5.0 $^{+0.6}_{-0.2}$ | | |
| Component alignment, front-rear | Δh | 0 ± 1 | | |
| Height of component from tape center | H | 19.5 ± 0.5 | 16.5 ± 0.5 - 0 | — |
| Height from tape center to crimp | Ho | — | — | 16 + 0.5 - 0 |
| Component height | H1 | 32.25 max. | $\begin{matrix} >23.5 \\ <32.25 \end{matrix}$ | 32.25 max. |
| Distance from component leads to tape bottom | ℓ_1 | 12 max. | | |
| Tape width | W | 18 $^{+1}_{-0.5}$ | | |
| Bonding tape width | W_3 | 5.5 min. | | |
| Feed hole position | W_1 | 9.0 ± 0.5 | | |
| Pitch between discs | P | 12.7 ± 1 | | |
| Feed hole pitch | Po | 12.7 ± 0.3 | | |
| Hole center to lead | P1 | 3.85 ± 0.7 | | |
| Feed hole center to component center | P2 | 6.35 ± 1 | | |
| Tape + bonding tape thickness | t | 0.7 ± 0.2 | | |
| Total tape thickness, including lead | t_2 | 1.5 max. | | |

PACKAGING

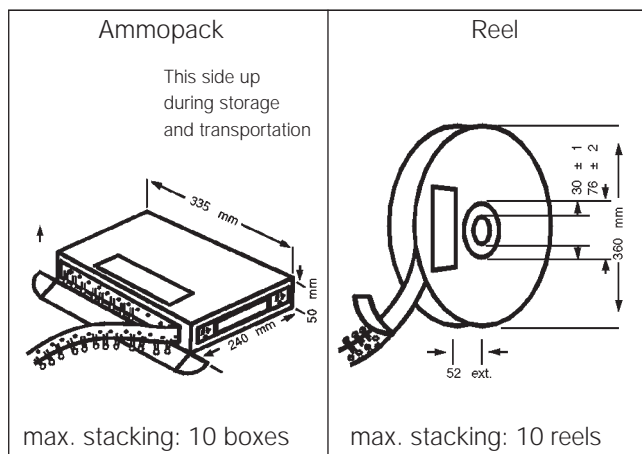

SHIPPING CONTAINER

