



# .150" x .200"

# SERIES 6308

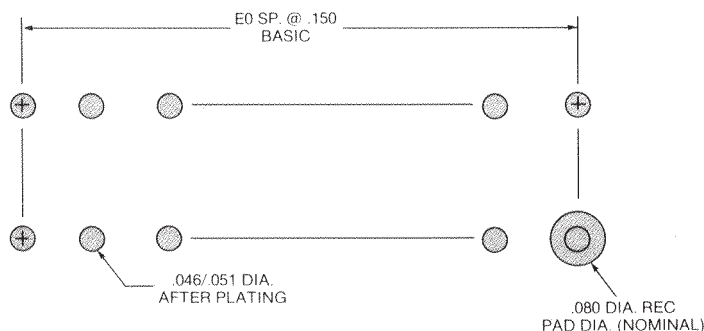

## .031" Square Post Press-Fit Contacts

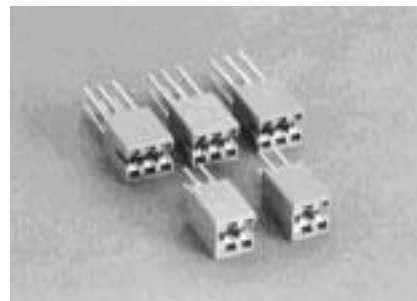

### Ordering Code

Typical Example	00	6308	006	313	001
-----------------	----	------	-----	-----	-----

**SERIES**  
6308

**NUMBER OF CONTACTS**  
6308

DUAL READ-OUT	
4	6

004 End module (one closed end)  
006 Center module (open ends)

**CONTACT CODE**  
313 60-6308-0213 (.372 tail length)  
320 60-6308-0223 (.592 tail length)

**VARIATION CODE**  
6308

#### Plating

Selective	Overall	
808	008	(6 center module)
811	011	(4 end module)

### POLARIZATION

Order polarizing insert separately by part number 60-6064-3317; fits between contacts.

### Features

- ☐ Designed for press-fit mounting in plated-thru holes
- ☐ Available in four and six contact modules
- ☐ Modules can be arranged to custom design press-fit card-edge connectors
- ☐ Lets you update your packaging scheme while maintaining existing contact spacing
- ☐ Press-fit system provides highly reliable gas-tight electrical and mechanical connection
- ☐ Tapered single beam contact offers very low contact resistance
- ☐ .150" x .200" grid pattern
- ☐ U.L. approved

### Specifications

**Current rating:** 5 amperes, maximum  
**Contact resistance:** 6 milliohms, maximum  
**Contact material:** Phosphor bronze

#### Contact plating:\*

**Selective:** 50-150 microinches nickel, 10 microinches min. gold-mating area only, 3-5 microinches gold flash on tail, balance bare nickel

**Overall:** 50-100 microinches nickel and 10 microinches min. gold overall

**Insertion/withdrawal force:** 2 to 12 ounces per contact pair, nominal P.C. card

**Insulator material:** Polyester

**Insulation resistance:** 5000 megohms, minimum, at 500 VDC

**Dielectric withstanding voltage:** 1200 VAC between adjacent contacts, RMS, at sea level

\*For other type platings please consult factory.