



SINGLE POLE, DOUBLE THROW CONNECTORIZED PLUG-IN SWITCHES

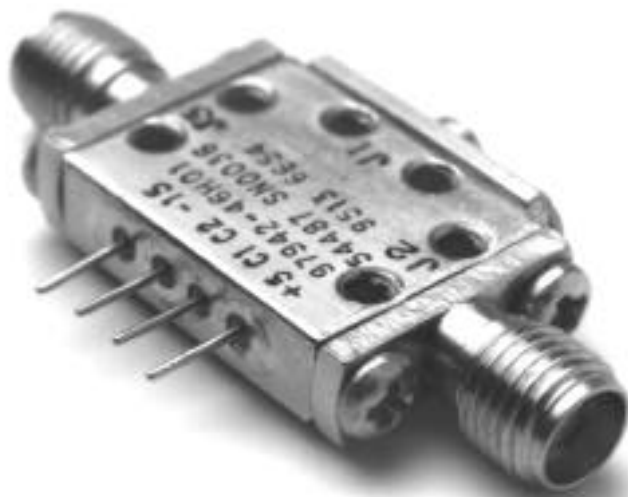

ELECTRICAL CHARACTERISTICS

PART #	TYPE	FREQ RANGE GHz	LOSS dB	ISO dB	VSWR	SWITCH SPEED ns	RF POWER dBm	DC SUPPLY Volts
6029	SP2T N	9-10	1.5	70	1.5:1	100	25	+5,-5
6033	SP2T N	2-18	2.0	60	2.0:1	100	25	+5,-5

PACKAGE OUTLINE

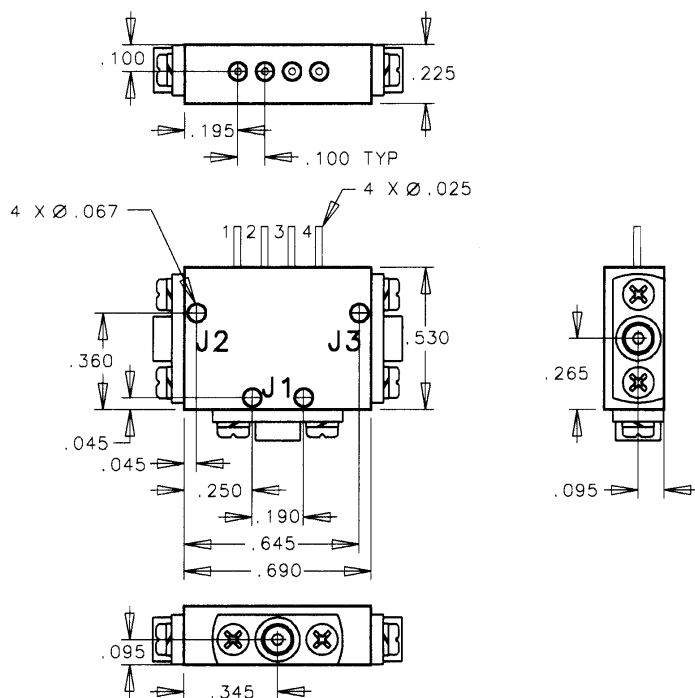

DESCRIPTION

Designed for use in highly integrated systems. The push-on RF and microwave connectors make these switches ideal for ease-of-use in maintenance and automated testing systems. Hermetic, military/industrial design.

ADDITIONAL FEATURES (#6029)

■ Isolation:
Up to 70 dB

CONNECTORS

■ Pin/SMA

OPERATING ENVIRONMENT

■ Operating Temperature:
-55 to +125°C

■ Storage Temperature:
-65 to +150°C

■ Impedance:
50 ohm

■ Control:
Transistor-Transistor Logic
(TTL)

APPLICATIONS

■ Radar Warning Receivers
(RWR)
■ Tracking radar