


SINGLE POLE, THREE THROW DROP-IN MODULES



ELECTRICAL CHARACTERISTICS

PART #	TYPE	FREQ RANGE GHz	LOSS dB	ISO dB	VSWR	SWITCH SPEED ns	RF POWER dBm	DC SUPPLY Volts
6053	SP3T R	1.5-1.9	1.0	50	1.5:1	400	20	+5,-5
6054	SP3T R	1-10	1.6	50	1.8:1	400	20	+5,-5

PACKAGE OUTLINE

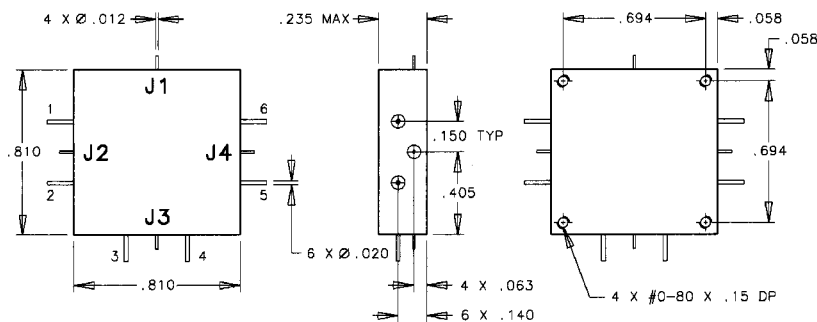

DESCRIPTION

General purpose switches designed for integration into microstrip sub-assemblies at frequencies up to 14 GHz. These switches are extremely compact, making them ideal for a wide range of applications where space is at a premium. Hermetic, military/industrial design.

CONNECTORS

- Pin

OPERATING ENVIRONMENT

- Operating Temperature:
-55 to +125°C
- Storage Temperature:
-65 to +150°C
- Impedance:
50 ohm
- Control:
Transistor-Transistor Logic
(TTL)

APPLICATIONS

- Radar Warning Receivers (RWR)
- Tracking radar