


SINGLE POLE, SINGLE THROW DROP-IN/CONNECTORIZED SWITCH MODULES



ELECTRICAL CHARACTERISTICS

PART #	TYPE	FREQ RANGE GHz	LOSS dB	ISO dB	VSWR	SWITCH SPEED ns	RF POWER dBm	DC SUPPLY Volts
6011	SPST N	2-14	2.5	60	2.0:1	200	25	+5,-5
6012	SPST N	.01-1	2.0	60	2.0:1	25	25	+5
6014	SPST N	9-10.1	2.0	80	1.5:1	12	30	+5,-5

PACKAGE OUTLINE

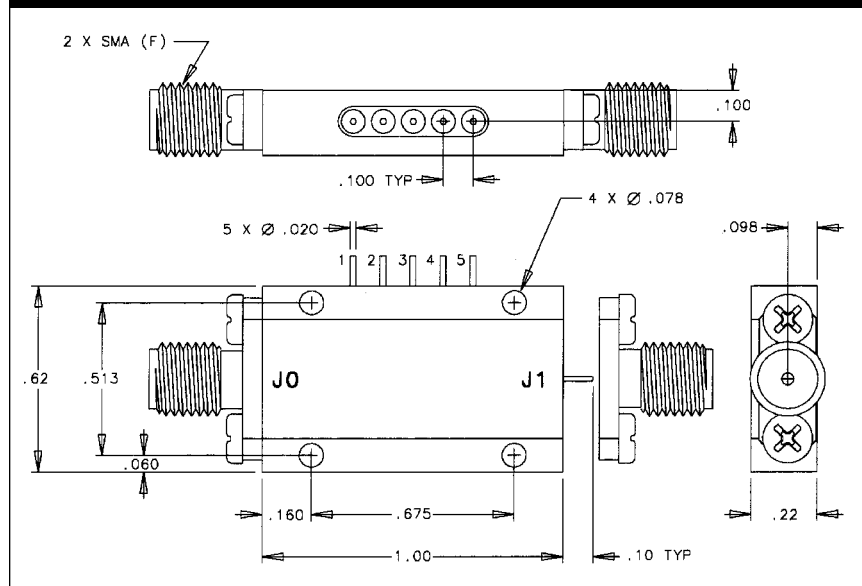

DESCRIPTION

Designed to deliver the fast switching speed and/or high isolation required in many of today's sophisticated radar systems. These modules are ideal for use in a wide range of both microstrip and connectorized environments, especially those where space is at a premium. Hermetic, military/industrial design.

ADDITIONAL FEATURES (#6014)

■ Isolation:
Up to 80 dB

CONNECTORS

■ Pin/SMA

OPERATING ENVIRONMENT

■ Operating Temperature:
-55 to +125°C

■ Storage Temperature:
-65 to +150°C

■ Impedance:
50 ohm

■ Control:
Transistor-Transistor Logic
(TTL)

APPLICATIONS

■ Tracking radar
■ Weather radar
■ Airborne surveillance
systems