



Integrated  
Circuit  
Systems, Inc.

**PRELIMINARY**

# ICS8547

## Hex, Low Skew, 1-to-2 DIFFERENTIAL-TO-LVDS CLOCK BUFFERS

### GENERAL DESCRIPTION




The ICS8547 is a Hex low skew, high performance 1-to-2 Differential-to-LVDS Clock Buffer and a member of the HiPerClockS™ family of High Performance Clock Solutions from ICS. Utilizing Low Voltage Differential Signaling (LVDS) the ICS8547 provides a low power, low noise, point-to-point solution for distributing clock signals over controlled impedances of 100Ω. The ICS8547 has six selectable clock inputs. The CLKx, nCLKx pairs can accept any differential input levels and translates them to 3.3V or 2.5V LVDS output levels.

Guaranteed output and part-to-part skew specifications make the ICS8547 ideal for those applications demanding well defined performance and repeatability.


### FEATURES

- 12 LVDS outputs
- Selectable CLKx, nCLKx inputs
- CLKx, nCLKx pair can accept the following differential input levels: LVDS, LVPECL, LVHSTL, SSTL, HCSL
- Maximum output frequency up to 900MHz
- Translates any differential input signal (LVPECL, LVHSTL, SSTL, DCM) to LVDS levels without external bias networks
- Translates any single-ended input signal to LVDS with resistor bias on nCLKx input
- Output skew: TBD
- Part-to-part skew: TBD
- Propagation delay: 1.4ns (typical)
- Designed to meet or exceed the requirements of ANSI TIA/EIA-644
- 3.3V or 2.5V operating supply
- 0°C to 70°C ambient operating temperature
- Industrial temperature information available upon request

### BLOCK DIAGRAM

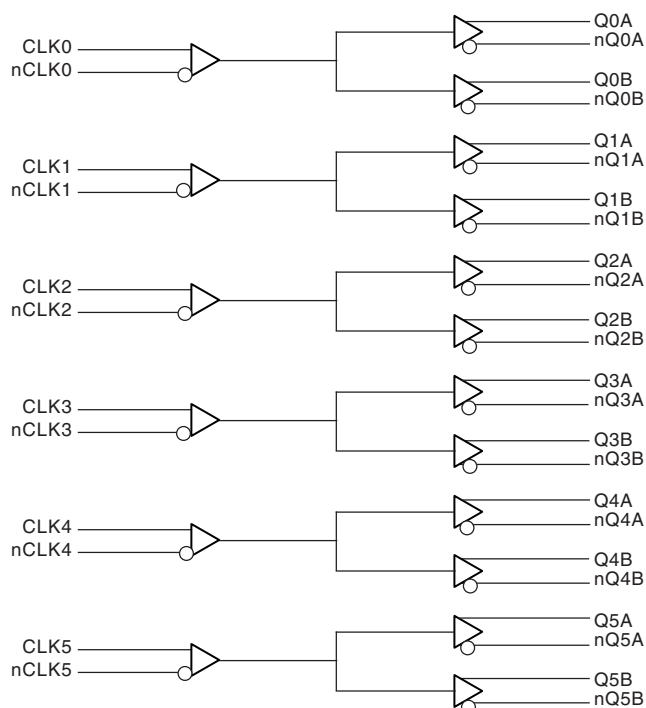

### PIN ASSIGNMENT

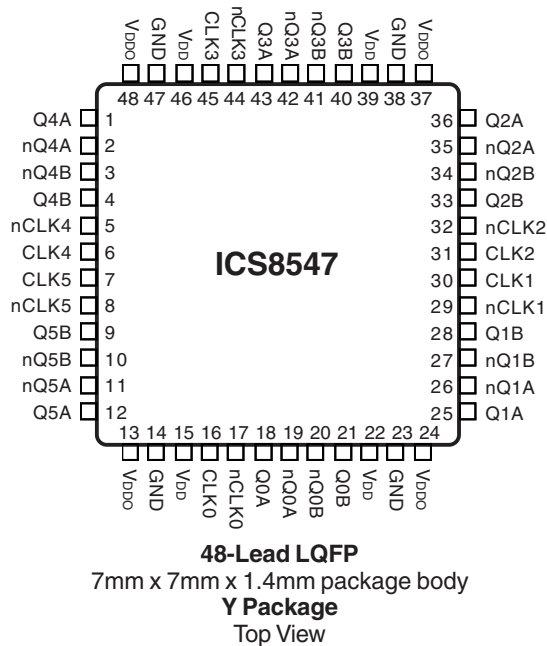

The Preliminary Information presented herein represents a product in prototyping or pre-production. The noted characteristics are based on initial product characterization. Integrated Circuit Systems, Incorporated (ICS) reserves the right to change any circuitry or specifications without notice.



Integrated  
Circuit  
Systems, Inc.

# PRELIMINARY

## ICS8547

### Hex, Low SKEW, 1-TO-2 DIFFERENTIAL-TO-LVDS CLOCK BUFFERS

**TABLE 1. PIN DESCRIPTIONS**

Number	Name	Type		Description
1, 2	Q4A, nQ4A	Output		Differential output pair. LVDS interface levels.
3, 4	nQ4B, Q4B	Output		Differential output pair. LVDS interface levels.
5	nCLK4	Input	Pullup	Inverting differential clock input.
6	CLK4	Input	Pulldown	Non-inverting differential clock input.
7	CLK5	Input	Pulldown	Non-inverting differential clock input.
8	nCLK5	Input	Pullup	Inverting differential clock input.
9, 10	Q5B, nQ5B	Output		Differential output pair. LVDS interface levels.
11, 12	nQ5A, Q5A	Output		Differential output pair. LVDS interface levels.
13, 24, 37, 48	V <sub>DDO</sub>	Power		Output supply pins. Connect to 3.3V or 2.5V.
14, 23, 38, 47	GND	Power		Power supply ground. Connect to ground.
15, 22, 39, 46	V <sub>DD</sub>	Power		Positive supply pins. Connect to 3.3V or 2.5V.
16	CLK0	Input	Pulldown	Non-inverting differential clock input.
17	nCLK0	Input	Pullup	Inverting differential clock input.
18, 19	Q0A, nQ0A	Output		Differential output pair. LVDS interface levels.
20, 21	nQ0B, Q0B	Output		Differential output pair. LVDS interface levels.
25, 26	Q1A, nQ1A	Output		Differential output pair. LVDS interface levels.
27, 28	nQ1B, Q1B	Output		Differential output pair. LVDS interface levels.
29	nCLK1	Input	Pullup	Inverting differential clock input.
30	CLK1	Input	Pulldown	Non-inverting differential clock input.
31	CLK2	Input	Pulldown	Non-inverting differential clock input.
32	nCLK2	Input	Pullup	Inverting differential clock input.
33, 34	Q2B, nQ2B	Output		Differential output pair. LVDS interface levels.
35, 36	nQ2A, Q2A	Output		Differential output pair. LVDS interface levels.
40, 41	Q3B, nQ3B	Output		Differential output pair. LVDS interface levels.
42, 43	nQ3A, Q3A	Output		Differential output pair. LVDS interface levels.
44	nCLK3	Input	Pullup	Inverting differential clock input.
45	CLK3	Input	Pulldown	Non-inverting differential clock input.

NOTE: *Pullup* and *Pulldown* refers to internal input resistors. See Table 2, Pin Characteristics, for typical values.



TABLE 2. PIN CHARACTERISTICS

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$C_{IN}$	Input Capacitance				4	pF
$R_{PULLUP}$	Input Pullup Resistor			51		K $\Omega$
$R_{PULLDOWN}$	Input Pulldown Resistor			51		K $\Omega$
$C_{OUT}$	Output Capacitance					pF

TABLE 3. CLOCK INPUT FUNCTION TABLE

Inputs		Outputs		Input to Output Mode	Polarity
CLKx	nCLKx	Q0A thru Q5A, Q0B thru Q5B	nQ0A thru nQ5A, nQ5B thru nQ5B		
0	1	LOW	HIGH	Differential to Differential	Non Inverting
1	0	HIGH	LOW	Differential to Differential	Non Inverting
0	Biased; NOTE 1	LOW	HIGH	Single Ended to Differential	Non Inverting
1	Biased; NOTE 1	HIGH	LOW	Single Ended to Differential	Non Inverting
Biased; NOTE 1	0	HIGH	LOW	Single Ended to Differential	Inverting
Biased; NOTE 1	1	LOW	HIGH	Single Ended to Differential	Inverting

NOTE 1: Please refer to the Application Information section on page 10, Figure 8, which discusses wiring the differential input to accept single ended levels.



Integrated  
Circuit  
Systems, Inc.

**PRELIMINARY**

# ICS8547

## Hex, Low SKEW, 1-TO-2 DIFFERENTIAL-TO-LVDS CLOCK BUFFERS

### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, $V_{DDx}$	4.6V
Inputs, $V_{DDI}$	-0.5V to $V_{DD} + 0.5V$
Outputs, $V_{DDO}$	-0.5V to $V_{DDO} + 0.5V$
Package Thermal Impedance, $\theta_{JA}$	47.9°C/W (0 lfpm)
Storage Temperature, $T_{STG}$	-65°C to 150°C

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in the *DC Characteristics* or *AC Characteristics* is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

**TABLE 4A. POWER SUPPLY DC CHARACTERISTICS,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$V_{DD}$	Positive Supply Voltage		3.135	3.3	3.465	V
$V_{DDO}$	Output Supply Voltage		3.135	3.3	3.465	V
$I_{DD}$	Positive Supply Current				50	mA
$I_{DDO}$	Output Supply Current					mA

**TABLE 4B. DIFFERENTIAL DC CHARACTERISTICS,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$I_{IH}$	Input High Current	CLKx $V_{IN} = *V_{DD} = 3.465V$			150	$\mu A$
		nCLKx $V_{IN} = *V_{DD} = 3.465V$			5	$\mu A$
$I_{IL}$	Input Low Current	CLKx $*V_{DD} = 3.465V, V_{IN} = 0V$	-5			$\mu A$
		nCLKx $*V_{DD} = 3.465V, V_{IN} = 0V$	-150			$\mu A$
$V_{TH}$	Differential Input High Threshold Voltage				100	mV
$V_{TL}$	Differential Input Low Threshold Voltage		-100			mV
$V_{PP}$	Peak-to-Peak Voltage		0.15		1.3	V
$V_{CMR}$	Common Mode Voltage Range		0.5		$V_{DD} - 0.85$	V

\*NOTE:  $V_{DD}$  denotes  $V_{DD}$  and  $V_{DDO}$ .

**TABLE 4C. LVDS DC CHARACTERISTICS,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$V_{OD}$	Differential Output Voltage			350		mV
$\Delta V_{OD}$	$V_{OD}$ Magnitude Change			0		mV
$V_{OS}$	Offset Voltage			1.25		V
$\Delta V_{OS}$	$V_{OS}$ Magnitude Change			5		mV
$I_{OZ}$	High Impedance Leakage Current			$\pm 1$		$\mu A$
$V_{OX}$	Output Crossover Voltage			TBD		V



Integrated  
Circuit  
Systems, Inc.

**PRELIMINARY**

**ICS8547**  
Hex, Low Skew, 1-TO-2  
DIFFERENTIAL-TO-LVDS CLOCK BUFFERS

**TABLE 4D. POWER SUPPLY DC CHARACTERISTICS,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$V_{DD}$	Positive Supply Voltage		2.375	2.5	2.625	V
$V_{DDO}$	Output Supply Voltage		2.375	2.5	2.625	V
$I_{DD}$	Positive Supply Current				50	mA
$I_{DDO}$	Output Supply Current					mA

**TABLE 4E. DIFFERENTIAL DC CHARACTERISTICS,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$I_{IH}$	Input High Current	CLKx $V_{IN} = V_{DD} = 3.465V$			150	$\mu A$
		nCLKx $V_{IN} = V_{DD} = 3.465V$			5	$\mu A$
$I_{IL}$	Input Low Current	CLKx $V_{DD} = 3.465V, V_{IN} = 0V$	-5			$\mu A$
		nCLKx $V_{DD} = 3.465V, V_{IN} = 0V$	-150			$\mu A$
$V_{TH}$	Differential Input High Threshold Voltage				100	mV
$V_{TL}$	Differential Input Low Threshold Voltage		-100			mV
$V_{PP}$	Peak-to-Peak Voltage		0.15		1.3	V
$V_{CMR}$	Common Mode Voltage Range		0.5		$V_{DD} - 0.85$	V

**TABLE 4F. LVDS DC CHARACTERISTICS,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$V_{OD}$	Differential Output Voltage			350		mV
$\Delta V_{OD}$	$V_{OD}$ Magnitude Change			0		mV
$V_{OS}$	Offset Voltage			1.25		V
$\Delta V_{OS}$	$V_{OS}$ Magnitude Change			5		mV
$I_{OZ}$	High Impedance Leakage Current			$\pm 1$		$\mu A$
$V_{OX}$	Output Crossover Voltage			TBD		V



Integrated  
Circuit  
Systems, Inc.

**PRELIMINARY**

**ICS8547**  
Hex, Low Skew, 1-to-2  
DIFFERENTIAL-TO-LVDS CLOCK BUFFERS

**TABLE 5A. AC CHARACTERISTICS,  $V_{DD} = V_{DDO} = 3.3V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$f_{MAX}$	Output Frequency				900	MHz
$t_{PD}$	Propagation Delay; NOTE 1	$f \leq 900MHz$		1.4		ns
$tsk(o)$	Output Skew; NOTE 2, 4				TBD	ps
$tsk(pp)$	Part-to-Part Skew; NOTE 3, 4				TBD	ps
$t_R$	Output Rise Time	30% TO 70% at 50MHz	300		700	ps
$t_F$	Output Fall Time	30% TO 70% at 50MHz	300		700	ps
odc	Output Duty Cycle		48	50	52	%

All parameters measured at  $f_{MAX}$  unless noted otherwise.

NOTE 1: Measured from the differential input crossing point to the differential output crossing point.

NOTE 2: Defined as skew between outputs at the same supply voltages and with equal load conditions.

Measured from at the output differential cross points.

NOTE 3: Defined as between outputs on different devices operating at the same supply voltages and with equal load conditions. Using the same type of inputs on each device, the outputs are measured at the differential cross points.

NOTE 4: This parameter is defined in accordance with JEDEC Standard 65.

**TABLE 5B. AC CHARACTERISTICS,  $V_{DD} = V_{DDO} = 2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  TO  $70^\circ C$**

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
$f_{MAX}$	Output Frequency				900	MHz
$t_{PD}$	Propagation Delay; NOTE 1	$f \leq 900MHz$		1.4		ns
$tsk(o)$	Output Skew; NOTE 2, 4				TBD	ps
$tsk(pp)$	Part-to-Part Skew; NOTE 3, 4				TBD	ps
$t_R$	Output Rise Time	30% TO 70% at 50MHz	300		700	ps
$t_F$	Output Fall Time	30% TO 70% at 50MHz	300		700	ps
odc	Output Duty Cycle		48	50	52	%

All parameters measured at  $f_{MAX}$  unless noted otherwise.

NOTE 1: Measured from the differential input crossing point to the differential output crossing point.

NOTE 2: Defined as skew between outputs at the same supply voltages and with equal load conditions.



Measured from at the output differential cross points.

NOTE 3: Defined as between outputs on different devices operating at the same supply voltages and with equal load conditions. Using the same type of inputs on each device, the outputs are measured at the differential cross points.

NOTE 4: This parameter is defined in accordance with JEDEC Standard 65.



## PARAMETER MEASUREMENT INFORMATION


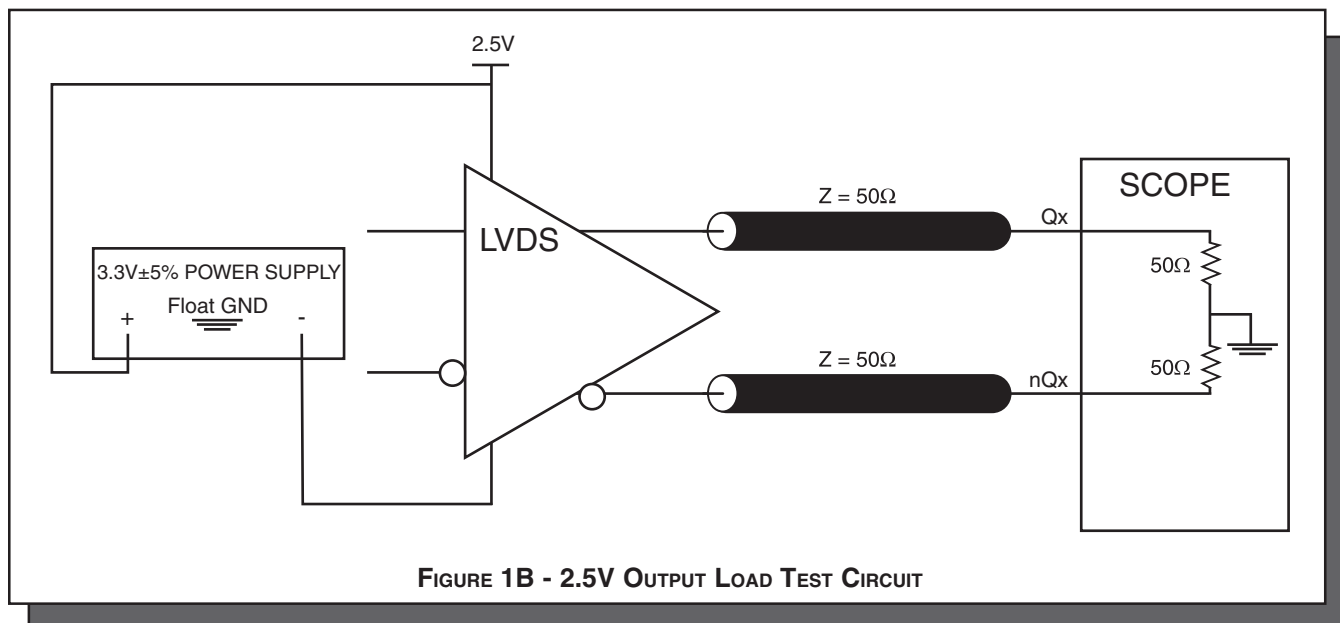
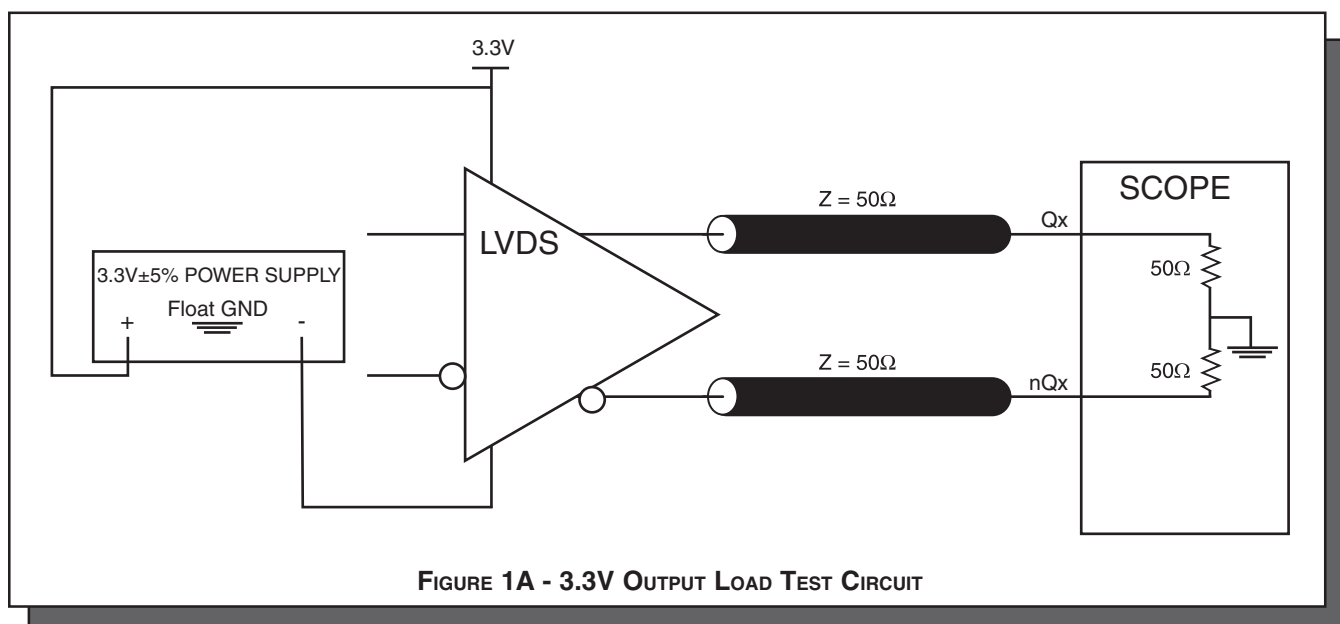




Integrated  
Circuit  
Systems, Inc.

**PRELIMINARY**

**ICS8547**  
Hex, Low SKEW, 1-TO-2  
DIFFERENTIAL-TO-LVDS CLOCK BUFFERS

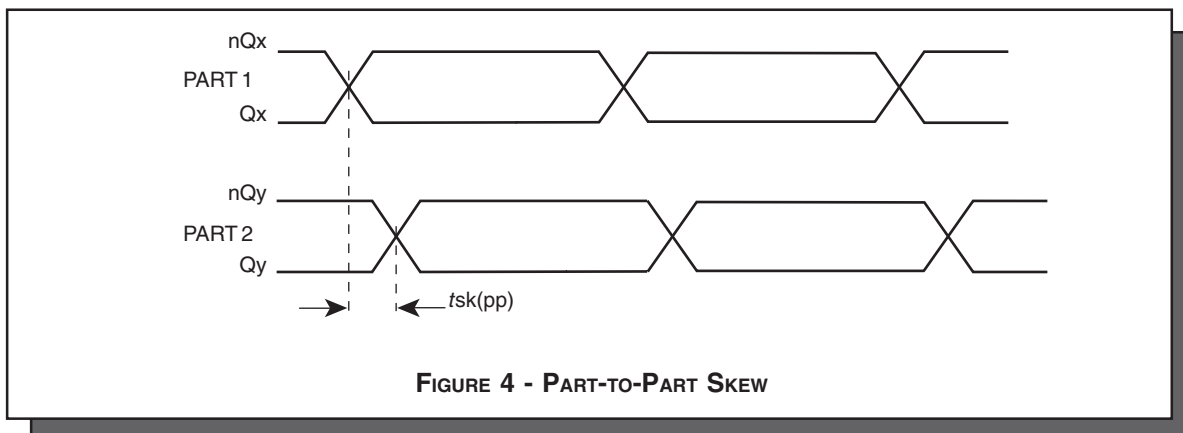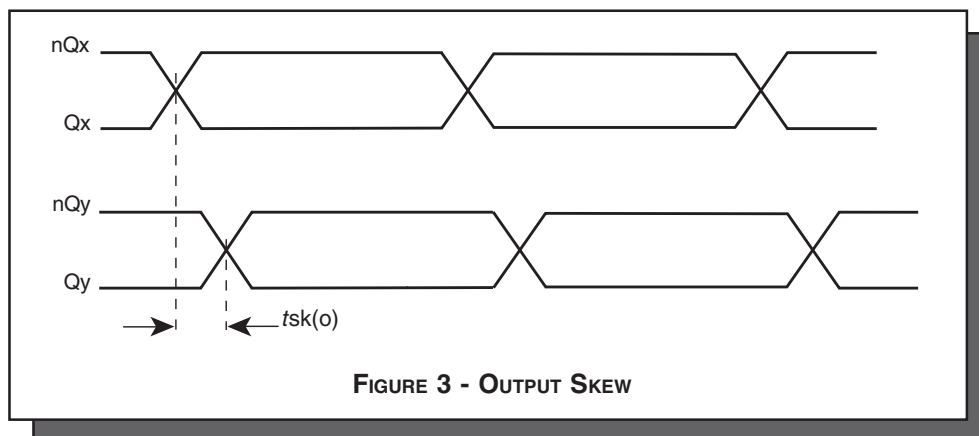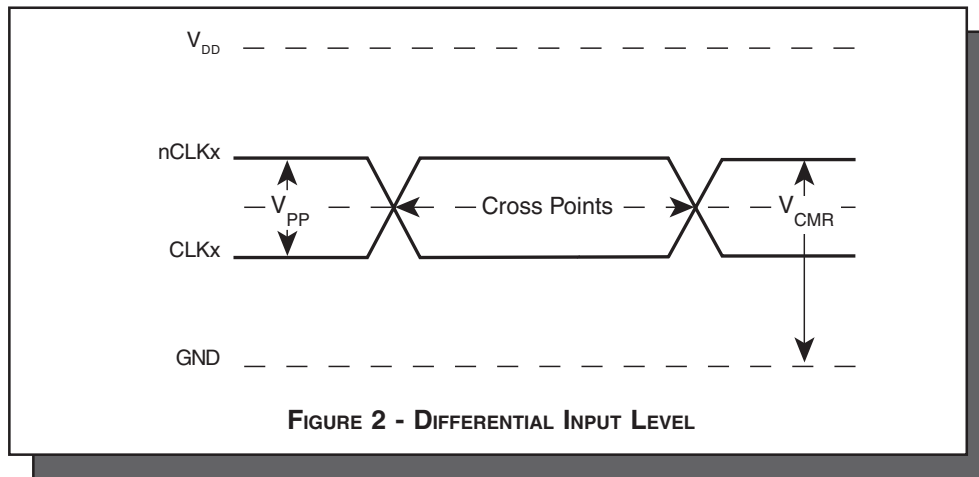



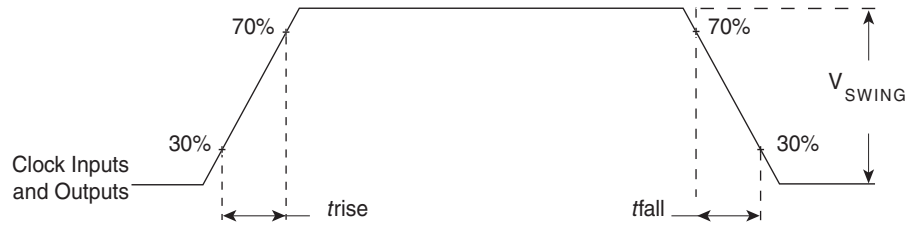


FIGURE 5 - INPUT AND OUTPUT RISE AND FALL TIME

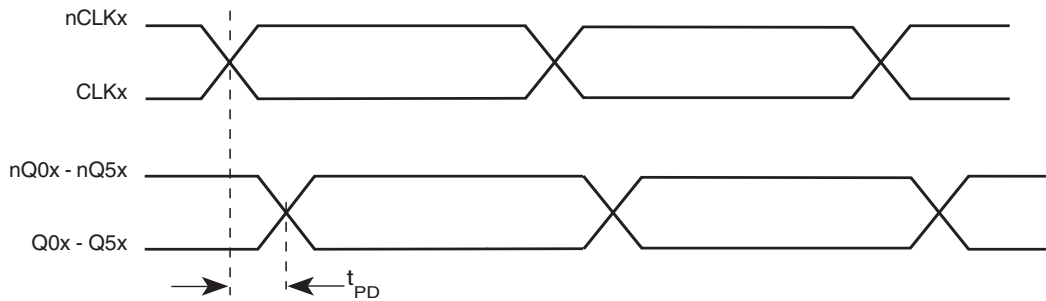


FIGURE 6 - PROPAGATION DELAY

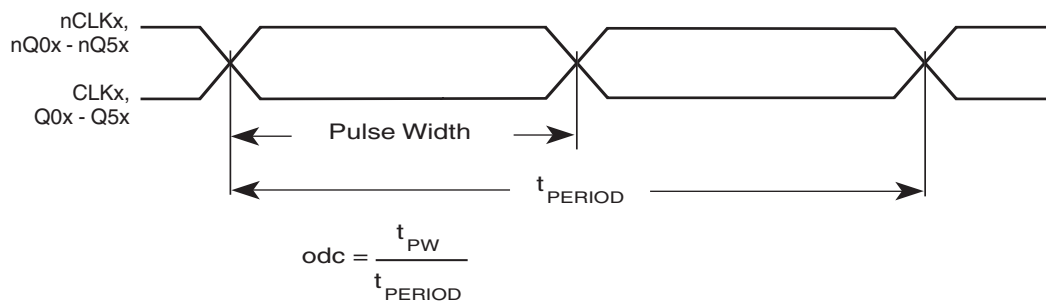


FIGURE 7 - odc &  $t_{PERIOD}$



## APPLICATION INFORMATION

### WIRING THE DIFFERENTIAL INPUT TO ACCEPT SINGLE ENDED LEVELS

Figure 8 shows how the differential input can be wired to accept single ended levels. The reference voltage  $V_{REF} \approx V_{DD}/2$  is generated by the bias resistors R1, R2 and C1. This bias circuit should be located as close as possible to the input pin. The ratio of R1 and R2 might need to be adjusted to position the  $V_{REF}$  in the center of the input voltage swing. For example, if the input clock swing is only 2.5V and  $V_{DD} = 3.3V$ ,  $V_{REF}$  should be 1.25V and  $R2/R1 = 0.609$ .

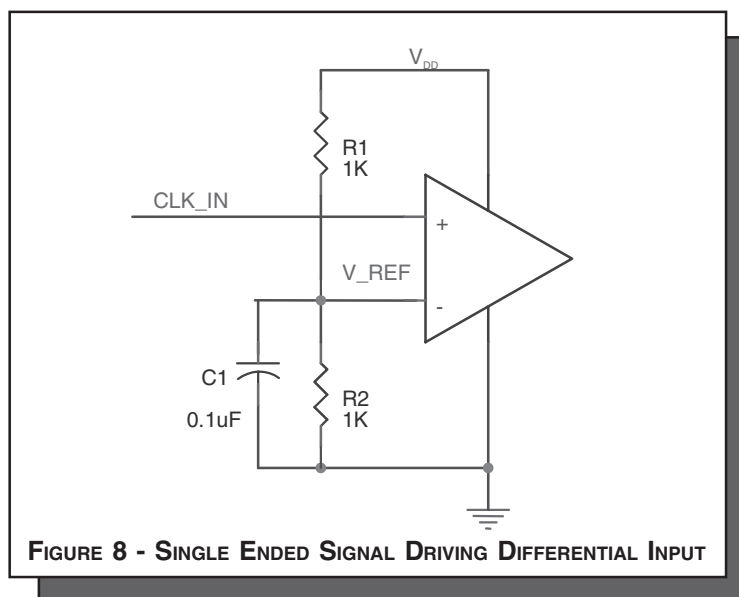




TABLE 6.  $\theta_{JA}$  vs. AIR FLOW TABLE

$\theta_{JA}$ by Velocity (Linear Feet per Minute)			
	0	200	500
Single-Layer PCB, JEDEC Standard Test Boards	67.8°C/W	55.9°C/W	50.1°C/W
Multi-Layer PCB, JEDEC Standard Test Boards	47.9°C/W	42.1°C/W	39.4°C/W
<b>NOTE:</b> Most modern PCB designs use multi-layered boards. The data in the second row pertains to most designs.			

#### TRANSISTOR COUNT

The transistor count for ICS8547 is: 1117




Integrated  
Circuit  
Systems, Inc.

**PRELIMINARY**

# ICS8547

## Hex, Low SKEW, 1-TO-2 DIFFERENTIAL-TO-LVDS CLOCK BUFFERS

**PACKAGE OUTLINE - Y SUFFIX**

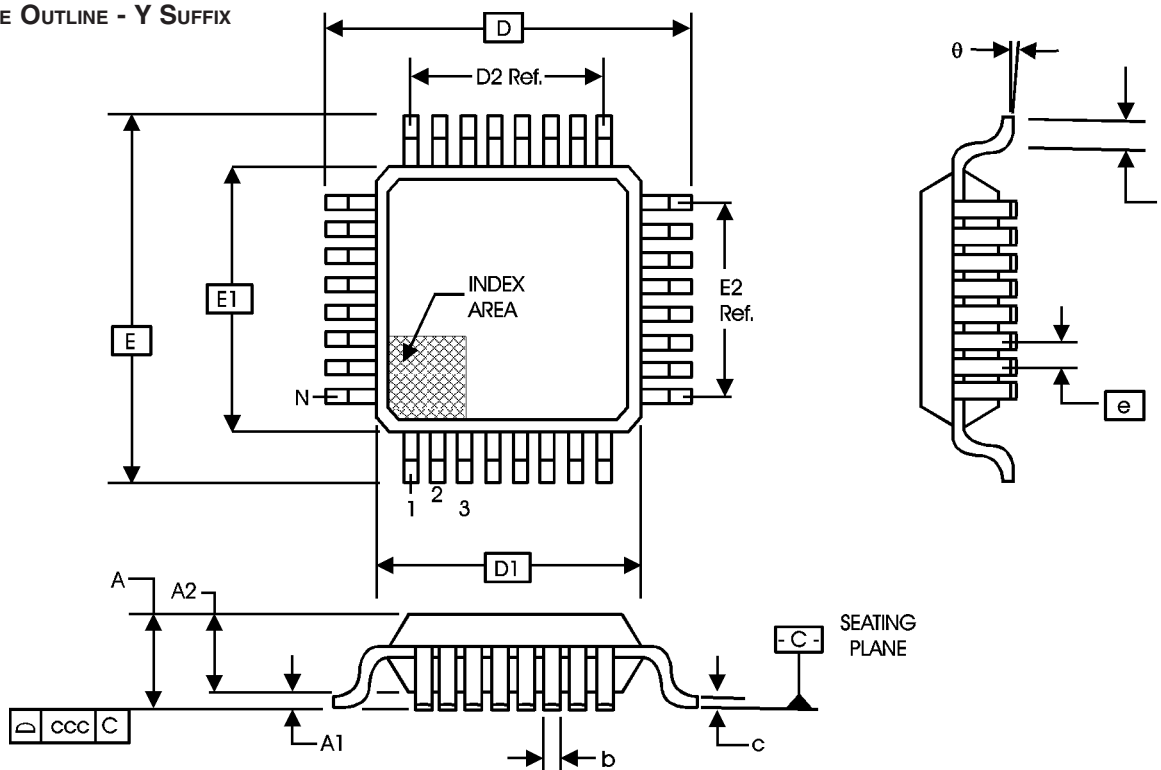

**TABLE 6. PACKAGE DIMENSIONS**

JEDEC VARIATION ALL DIMENSIONS IN MILLIMETERS			
SYMBOL	BBC		
	MINIMUM	NOMINAL	MAXIMUM
N	48		
A	--	--	1.60
A1	0.05	--	0.15
A2	1.35	1.40	1.45
b	0.17	0.22	0.27
c	0.09	--	0.20
D	9.00 BASIC		
D1	7.00 BASIC		
D2	5.50 Ref.		
E	9.00 BASIC		
E1	7.00 BASIC		
E2	5.50 Ref.		
e	0.50 BASIC		
L	0.45	0.60	0.75
theta	0°	--	7°
ccc	--	--	0.08

Reference Document: JEDEC Publication 95, MS-026



TABLE 7. ORDERING INFORMATION

Part/Order Number	Marking	Package	Count	Temperature
ICS8547AY	ICS8547AY	48 Lead LQFP	250 per tray	0°C to 70°C
ICS8547AYT	ICS8547AY	48 Lead LQFP on Tape and Reel	1000	0°C to 70°C

While the information presented herein has been checked for both accuracy and reliability, Integrated Circuit Systems, Incorporated (ICS) assumes no responsibility for either its use or for infringement of any patents or other rights of third parties, which would result from its use. No other circuits, patents, or licenses are implied. This product is intended for use in normal commercial applications. Any other applications such as those requiring extended temperature range, high reliability, or other extraordinary environmental requirements are not recommended without additional processing by ICS. ICS reserves the right to change any circuitry or specifications without notice. ICS does not authorize or warrant any ICS product for use in life support devices or critical medical instruments.