



Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016

LOW SKEW, 1-TO-16

DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

GENERAL DESCRIPTION



The ICS87016 is a low skew 1:16 clock generator and is a member of the HiPerClockS family of High Performance Clock Solutions. The device has 4 banks of 4 outputs and each bank can be independently selected for $\div 1$ or $\div 2$ frequency operation. Each bank also has its own power supply pins so that the banks can operate at the following different voltage levels: 3.3V, 2.5V, and 1.8V. The low impedance LVCMOS outputs are designed to drive 50 Ω series or parallel terminated transmission lines.


The divide select inputs, DIV_SEL A:DIV_SEL D, control the output frequency of each bank. The output banks can be independently selected for $\div 1$ or $\div 2$ operation. The bank enable inputs, CLK_ENA:CLK_END, support enabling and disabling each bank of outputs individually. The CLK_ENA:CLK_END circuitry has a synchronizer to prevent runt pulses when enabling or disabling the clock outputs. The master reset input, nMR/OE, resets the $\div 1/\div 2$ flip flops and also controls the active and high impedance states of all outputs. This pin has an internal pull-up resistor and is normally used only for test purposes or in systems which use low power modes.

The ICS87016 is characterized to operate with the core at 3.3V and the banks at 3.3V, 2.5V, or 1.8V. Guaranteed bank, output, and part-to-part skew characteristics make the 87016 ideal for those clock applications demanding well-defined performance and repeatability.


FEATURES

- 16 LVCMOS outputs (4 banks of 4 outputs)
- Selectable differential CLK1, nCLK1 or LVCMOS clock input
- CLK1, nCLK1 pair can accept the following differential input levels: LVDS, LVPECL, LVHSTL, SSTL, HCSL
- CLK0 supports the following input types: LVCMOS, LVTTTL
- Maximum output frequency: 250MHz
- Independent bank control for $\div 1$ or $\div 2$ operation
- Independent bank voltage settings for 3.3V, 2.5V, or 1.8V operation
- Asynchronous clock enable/disable
- Output skew: 144ps (typical)
- Bank skew: 32ps (typical)
- Part-to-part skew: TBD
- 3.3V core, 3.3V, 2.5V, or 1.8V output operating supply
- 0°C to 70°C ambient operating temperature
- Industrial temperature information available upon request

BLOCK DIAGRAM

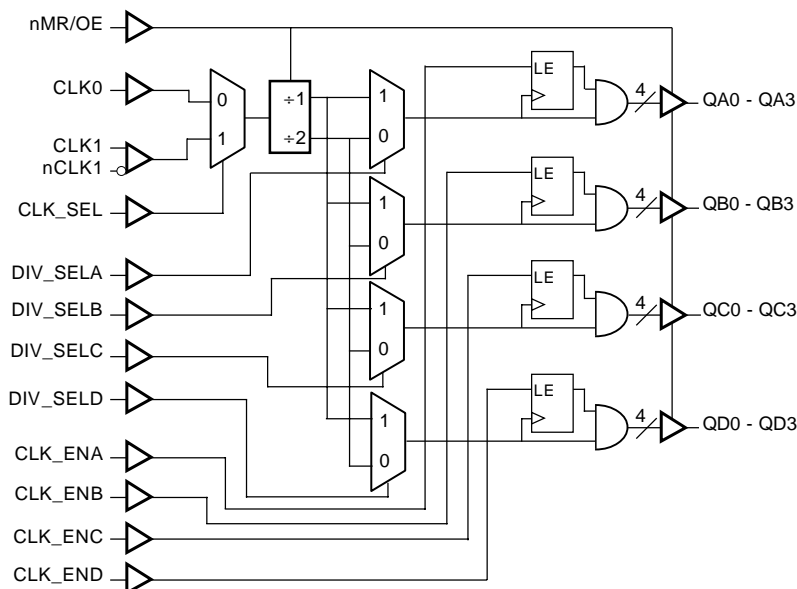

PIN ASSIGNMENT

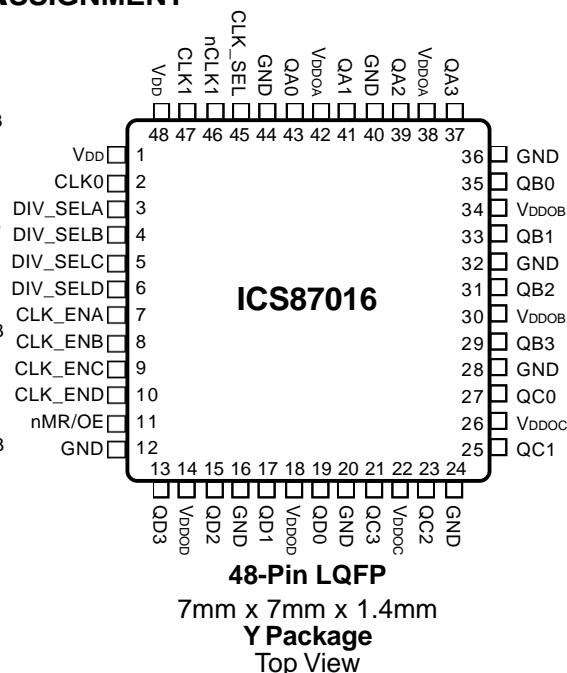

The Preliminary Information presented herein represents a product in prototyping or pre-production. The noted characteristics are based on initial product characterization. Integrated Circuit Systems, Incorporated (ICS) reserves the right to change any circuitry or specifications without notice.



Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016
Low SKEW, 1-to-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

TABLE 1. PIN DESCRIPTIONS

Number	Name	Type		Description
1, 48	V _{DD}	Power		Positive supply pins. Connect to 3.3V.
2	CLK0	Input	Pulldown	LVCMOS / LVTTL clock input.
3	DIV_SELA	Input	Pullup	Controls frequency division for Bank A outputs. LVCMOS / LVTTL interface levels.
4	DIV_SELB	Input	Pullup	Controls frequency division for Bank B outputs. LVCMOS / LVTTL interface levels..
5	DIV_SELC	Input	Pullup	Controls frequency division for Bank C outputs. LVCMOS / LVTTL interface levels.
6	DIV_SELD	Input	Pullup	Controls frequency division for Bank D outputs. LVCMOS / LVTTL interface levels.
7	CLK_ENA	Input	Pullup	Output enable for Bank A outputs. Active HIGH. If pin is LOW, outputs drive low.
8	CLK_ENB	Input	Pullup	Output enable for Bank B outputs. Active HIGH. If pin is LOW, outputs drive low.
9	CLK_ENC	Input	Pullup	Output enable for Bank C outputs. Active HIGH. If pin is LOW, outputs drive low.
10	CLK_END	Input	Pullup	Output enable for Bank D outputs. Active HIGH. If pin is LOW, outputs drive low.
11	nMR/OE	Input	Pullup	Master reset. When LOW, resets the ÷1/÷2 flip flops and sets the outputs to high impedance. LVCMOS / LVTTL interface levels.
12, 16, 20, 24, 28, 32, 36, 40, 44	GND	Power		Ground.
13, 15, 17, 19	QD3, QD2, QD1, QD0	Output		Bank D outputs. LVCMOS / LVTTL interface levels.
14, 18	V _{DDOD}	Power		Output Bank D supply pins. Connect to 3.3V, 2.5V or 1.8V.
21, 23, 25, 27	QC3, QC2, QC1, QC0	Output		Bank C outputs. LVCMOS / LVTTL interface levels.
22, 26	V _{DDOC}	Power		Output Bank C supply pins. Connect to 3.3V, 2.5V or 1.8V.
29, 31, 33, 35	QB3, QB2, QB1, QB0	Output		Bank B outputs. LVCMOS / LVTTL interface levels.
30, 34	V _{DDOB}	Power		Output Bank B supply pins. Connect to 3.3V, 2.5V or 1.8V.
37, 39, 41, 43	QA3, QA2, QA1, QA0	Output		Bank A outputs. LVCMOS / LVTTL interface levels.
38, 42	V _{DDOA}	Power		Output Bank A supply pins. Connect to 3.3V, 2.5V or 1.8V.
45	CLK_SEL	Input	Pulldown	Clock select input. When HIGH, selects CLK1, nCLK1 inputs. When LOW, selects CLK0 input. LVCMOS / LVTTL interface levels.
46	nCLK1	Input	Pullup	Inverting differential clock input.
47	CLK1	Input	Pulldown	Non-inverting differential clock input.

NOTE: *Pullup* and *Pulldown* refer to internal input resistors. See Table 2, Pin Characteristics, for typical values.



Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016
Low SKEW, 1-TO-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

TABLE 2. PIN CHARACTERISTICS

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
C_{IN}	Input Capacitance				4	pF
R_{PULLUP}	Input Pullup Resistor			51		K Ω
C_{PD}	Power Dissipation Capacitance (per output)	$V_{DD}, V_{DDOX} = 3.465V$; NOTE 1			TBD	pF
		$V_{DD} = 3.465, V_{DDOX} = 2.625V$; NOTE 1			TBD	pF
		$V_{DD} = 3.465, V_{DDOX} = 1.89V$; NOTE 1			TBD	pF
R_{OUT}	Output Impedance			7		Ω

NOTE 1: V_{DDOX} denotes $V_{DDOA}, V_{DDOB}, V_{DDOC}$, and V_{DDOD} .

TABLE 3. FUNCTION TABLE

Inputs			Outputs	
nMR/OE	CLK_ENx	DIV_SELx	Bank X	Qx frequency
0	X	X	Hi Z	N/A
1	1	0	Active	f _{IN} /2
1	1	1	Active	f _{IN}
1	0	X	Low	N/A



ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{DDx}	4.6V
Inputs, V_I	-0.5V to $V_{DD} + 0.5V$
Outputs, V_O	-0.5V to $V_{DDO} + 0.5V$
Package Thermal Impedance, θ_{JA}	47.9°C/W (0 lfpm)
Storage Temperature, T_{STG}	-65°C to 150°C

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in the *DC Characteristics* or *AC Characteristics* is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

TABLE 4A. DC CHARACTERISTICS, $V_{DD} = 3.3V \pm 5\%$, $T_A = 0^\circ C$ TO $70^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
V_{DD}	Positive Supply Voltage		3.135	3.3	3.465	V
V_{DDOx}	Output Supply Voltage; NOTE 1		3.135	3.3	3.465	V
			2.375	2.5	2.625	V
			1.71	1.8	1.89	V
I_{DD}	Power Supply Current			100		mA
I_{DDOx}	Output Supply Current; NOTE 2			20		mA

NOTE 1: V_{DDOx} denotes V_{DDOA} , V_{DDOB} , V_{DDOC} , and V_{DDOD} .

NOTE 2: I_{DDOx} denotes I_{DDOA} , I_{DDOB} , I_{DDOC} , and I_{DDOD} .

TABLE 4B. LVCMOS DC CHARACTERISTICS, $V_{DD} = 3.3V \pm 5\%$, $T_A = 0^\circ C$ TO $70^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
V_{IH}	Input High Voltage	DIV_SELA:DIV_SEL, CLK_ENA:CLK_END, nMR/OE, CLK_SEL	2		$V_{DD} + 0.3$	V
		CLK0	2		$V_{DD} + 0.3$	V
V_{IL}	Input Low Voltage	DIV_SELA:DIV_SEL, CLK_ENA:CLK_END, nMR/OE, CLK_SEL	-0.3		0.8	V
		CLK0	-0.3		1.3	V
I_{IH}	Input High Current	CLK_ENA:CLK_END, DIV_SELA:DIV_SEL, nMR/OE	$V_{DD} = V_{IN} = 3.465V$		5	μA
		CLK0, CLK_SEL	$V_{DD} = V_{IN} = 3.465V$		150	μA
I_{IL}	Input Low Current	CLK_ENA:CLK_END, DIV_SELA:DIV_SEL, nMR/OE	$V_{DD} = 3.465V, V_{IN} = 0V$	-150		μA
		CLK0, CLK_SEL	$V_{DD} = 3.465V, V_{IN} = 0V$	-5		μA
V_{OH}	Output High Voltage; NOTE 1	$V_{DDOx} = 3.465V$; NOTE 2	2.6			V
		$V_{DDOx} = 2.625V$; NOTE 2	1.8			V
		$V_{DDOx} = 1.89V$; NOTE 2	TBD			V
V_{OL}	Output Low Voltage; NOTE 1				0.5	V
I_{OZL}	Output Tristate Current Low				TBD	μA
I_{OZH}	Output Tristate Current High				TBD	μA

NOTE 1: Outputs terminated with 50Ω to $V_{DDOx}/2$. See Parameter Measurement Information, Output Load Test Circuit.

NOTE 2: V_{DDOx} denotes V_{DDOA} , V_{DDOB} , V_{DDOC} and V_{DDOD} .



Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016

LOW SKEW, 1-TO-16

DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

TABLE 4C. DIFFERENTIAL DC CHARACTERISTICS, $V_{DD} = 3.3V \pm 5\%$, $T_A = 0^\circ C$ TO $70^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
I_{IH}	Input High Current	nCLK1 $V_{IN} = V_{DD} = 3.465V$			5	μA
		CLK1 $V_{IN} = V_{DD} = 3.465V$			150	μA
I_{IL}	Input Low Current	nCLK1 $V_{IN} = 0V, V_{DD} = 3.465V$	-150			μA
		CLK1 $V_{IN} = 0V, V_{DD} = 3.465V$	-5			μA
V_{PP}	Peak-to-Peak Input Voltage		0.15		1.3	V
V_{CMR}	Common Mode Input Voltage; NOTE 1, 2		GND + 0.5		$V_{DD} - 0.85$	V

NOTE 1: For single ended applications, the maximum input voltage for CLK1, nCLK1 is $V_{DD} + 0.3V$.

NOTE 2: Common mode voltage is defined as V_{IH} .

TABLE 5A. AC CHARACTERISTICS, $V_{DD} = V_{DDOX} = 3.3V \pm 5\%$, $T_A = 0^\circ C$ TO $70^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
f_{MAX}	Output Frequency				250	MHz
tp_{LH}	Propagation Delay, Low to High	CLK0; NOTE 1A		3.8		ns
		CLK1, nCLK1; NOTE 1B		3.8		ns
$tsk(b)$	Bank Skew; NOTE 2, 7	Measured on the Rising Edge		44		ps
$tsk(o)$	Output Skew; NOTE 3, 7	Measured on the Rising Edge		124		ps
$tsk(w)$	Multiple Frequency Skew; NOTE 4, 7			TBD		ps
$tsk(pp)$	Part-to-Part Skew; NOTE 5, 7			TBD		ps
t_R	Output Rise Time; NOTE 6	30% to 70% @ 50MHz	300		800	ps
t_F	Output Fall Time; NOTE 6	30% to 70% @ 50MHz	300		800	ps
odc	Output Duty Cycle			50		%
t_{EN}	Output Enable Time; NOTE 6			TBD		ns
t_{DIS}	Output Disable Time; NOTE 6			TBD		ns

All parameters measured at 133.3MHz unless noted otherwise.

NOTE 1A: Measured from the $V_{DD}/2$ of the input to $V_{DDOX}/2$ of the output.

NOTE 1B: Measured from the differential input crossing point to $V_{DDOX}/2$ of the output.

NOTE 2: Defined as skew within a bank with equal load conditions.

NOTE 3: Defined as skew between outputs at the same supply voltage and with equal load conditions.

Measured at $V_{DDOX}/2$.

NOTE 4: Defined as skew across banks of outputs switching in the same direction operating at different frequencies with the same supply voltages and equal load conditions. Measured at $V_{DDOX}/2$.

NOTE 5: Defined as skew between outputs on different devices operating at the same supply voltages and with equal load conditions. Using the same type of input on each device, the output is measured at $V_{DDOX}/2$.

NOTE 6: These parameters are guaranteed by characterization. Not tested in production.

NOTE 7: This parameter is defined in accordance with JEDEC Standard 65.



Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016
Low SKEW, 1-to-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

TABLE 5B. AC CHARACTERISTICS, $V_{DD} = 3.3V \pm 5\%$, $V_{DDOX} = 2.5V \pm 5\%$, $T_A = 0^\circ C$ TO $70^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
f_{MAX}	Output Frequency				250	MHz
tp_{LH}	Propagation Delay, Low to High	CLK0; NOTE 1A		3.8		ns
		CLK1, nCLK1; NOTE 1B		3.8		ns
$tsk(b)$	Bank Skew; NOTE 2, 7	Measured on the Rising Edge		40		ps
$tsk(o)$	Output Skew; NOTE 3, 7	Measured on the Rising Edge		114		ps
$tsk(w)$	Multiple Frequency Skew; NOTE 4, 7			TBD		ps
$tsk(pp)$	Part-to-Part Skew; NOTE 5, 7			TBD		ps
t_R	Output Rise Time; NOTE 6	30% to 70% @ 50MHz	300		800	ps
t_F	Output Fall Time; NOTE 6	30% to 70% @ 50MHz	300		800	ps
odc	Output Duty Cycle			50		%
t_{EN}	Output Enable Time; NOTE 6			TBD		ns
t_{DIS}	Output Disable Time; NOTE 6			TBD		ns

All parameters measured at 133.3MHz unless noted otherwise.

NOTE 1A: Measured from the $V_{DD}/2$ of the input to $V_{DDOX}/2$ of the output.

NOTE 1B: Measured from the differential input crossing point to $V_{DDOX}/2$ of the output.

NOTE 2: Defined as skew within a bank with equal load conditions.

NOTE 3: Defined as skew between outputs at the same supply voltage and with equal load conditions.

Measured at $V_{DDOX}/2$.

NOTE 4: Defined as skew across banks of outputs switching in the same direction operating at different frequencies with the same supply voltages and equal load conditions. Measured at $V_{DDOX}/2$.

NOTE 5: Defined as skew between outputs on different devices operating at the same supply voltages and with equal load conditions. Using the same type of input on each device, the output is measured at $V_{DDOX}/2$.

NOTE 6: These parameters are guaranteed by characterization. Not tested in production.

NOTE 7: This parameter is defined in accordance with JEDEC Standard 65.



Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016
LOW SKEW, 1-TO-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

TABLE 5C. AC CHARACTERISTICS, $V_{DD} = 3.3V \pm 5\%$, $V_{DDOX} = 1.8V \pm 5\%$, $T_A = 0^\circ C$ TO $70^\circ C$

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
f_{MAX}	Output Frequency				250	MHz
tp_{LH}	Propagation Delay, Low to High	CLK0; NOTE 1A		3.8		ns
		CLK1, nCLK1; NOTE 1B		3.8		ns
$tsk(b)$	Bank Skew; NOTE 2, 7	Measured on the Rising Edge		32		ps
$tsk(o)$	Output Skew; NOTE 3, 7	Measured on the Rising Edge		144		ps
$tsk(w)$	Multiple Frequency Skew; NOTE 4, 7			TBD		ps
$tsk(pp)$	Part-to-Part Skew; NOTE 5, 7			TBD		ps
t_R	Output Rise Time; NOTE 6	30% to 70% @ 50MHz	300		800	ps
t_F	Output Fall Time; NOTE 6	30% to 70% @ 50MHz	300		800	ps
odc	Output Duty Cycle			50		%
t_{EN}	Output Enable Time; NOTE 6			TBD		ns
t_{DIS}	Output Disable Time; NOTE 6			TBD		ns

All parameters measured at 133.3MHz unless noted otherwise.

NOTE 1A: Measured from the $V_{DD}/2$ of the input to $V_{DDOX}/2$ of the output.

NOTE 1B: Measured from the differential input crossing point to $V_{DDOX}/2$ of the output.

NOTE 2: Defined as skew within a bank with equal load conditions.

NOTE 3: Defined as skew between outputs at the same supply voltage and with equal load conditions.

Measured at $V_{DDOX}/2$.

NOTE 4: Defined as skew across banks of outputs switching in the same direction operating at different frequencies with the same supply voltages and equal load conditions. Measured at $V_{DDOX}/2$.



NOTE 5: Defined as skew between outputs on different devices operating at the same supply voltages and with equal load conditions. Using the same type of input on each device, the output is measured at $V_{DDOX}/2$.

NOTE 6: These parameters are guaranteed by characterization. Not tested in production.

NOTE 7: This parameter is defined in accordance with JEDEC Standard 65.



PARAMETER MEASUREMENT INFORMATION

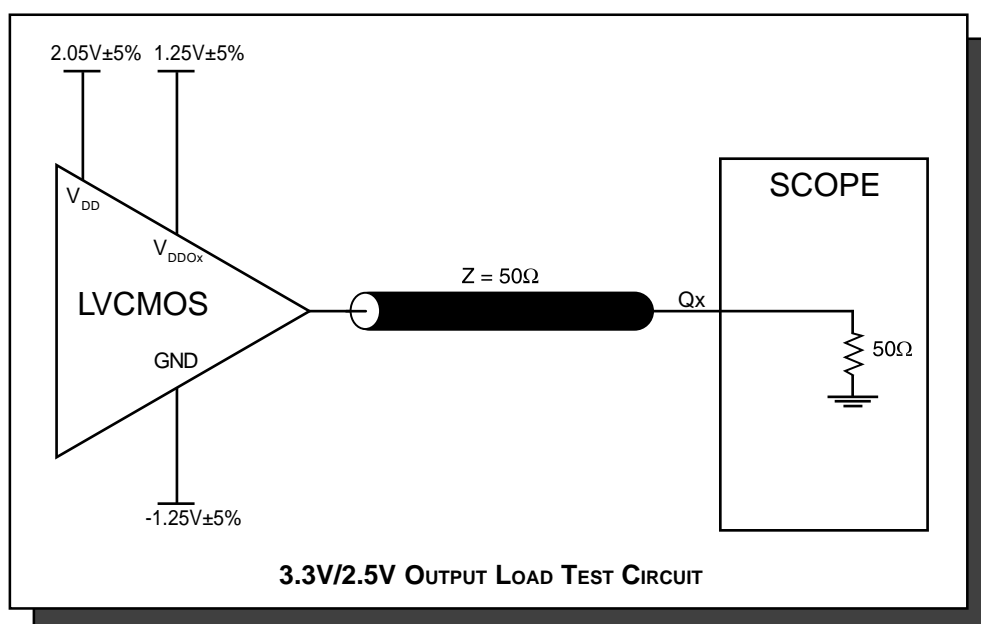
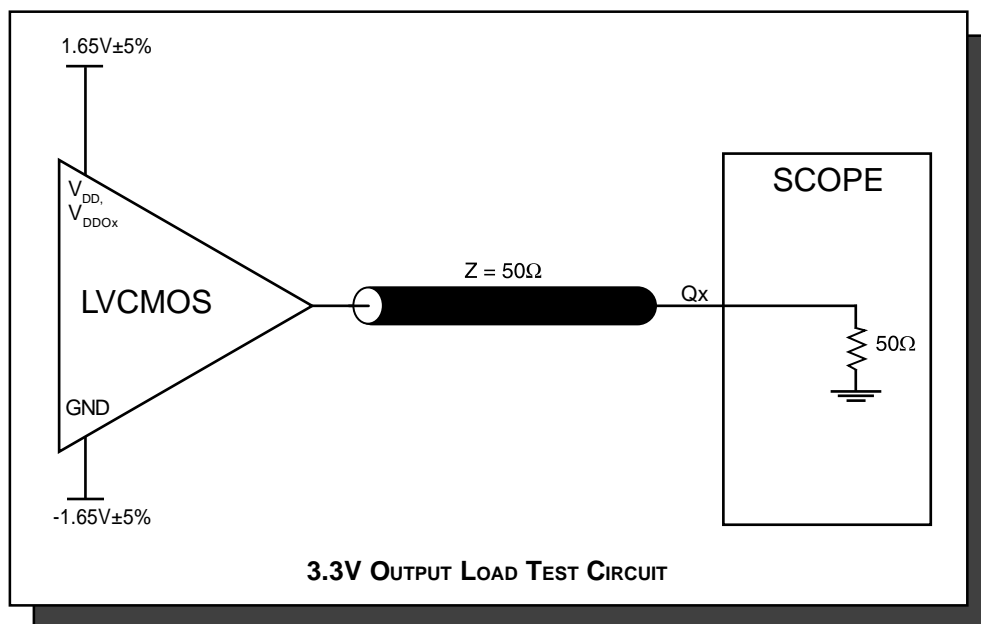




Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016
LOW SKEW, 1-TO-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR


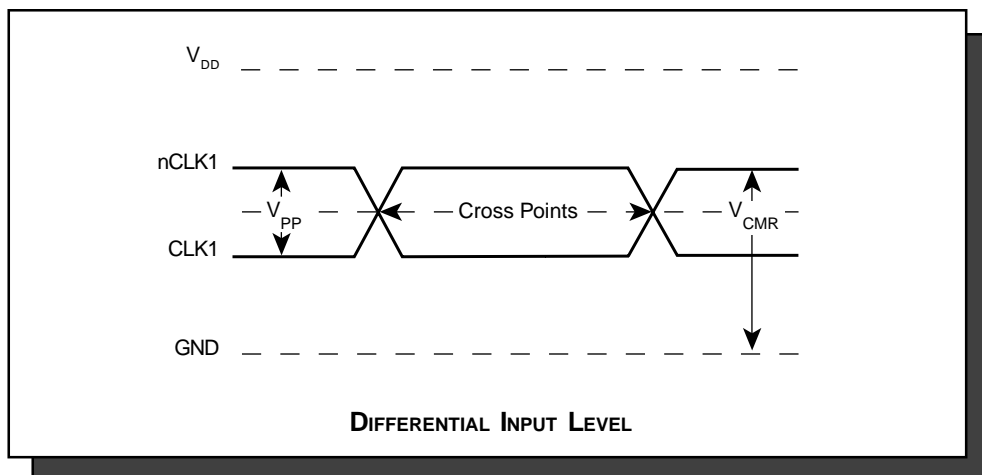
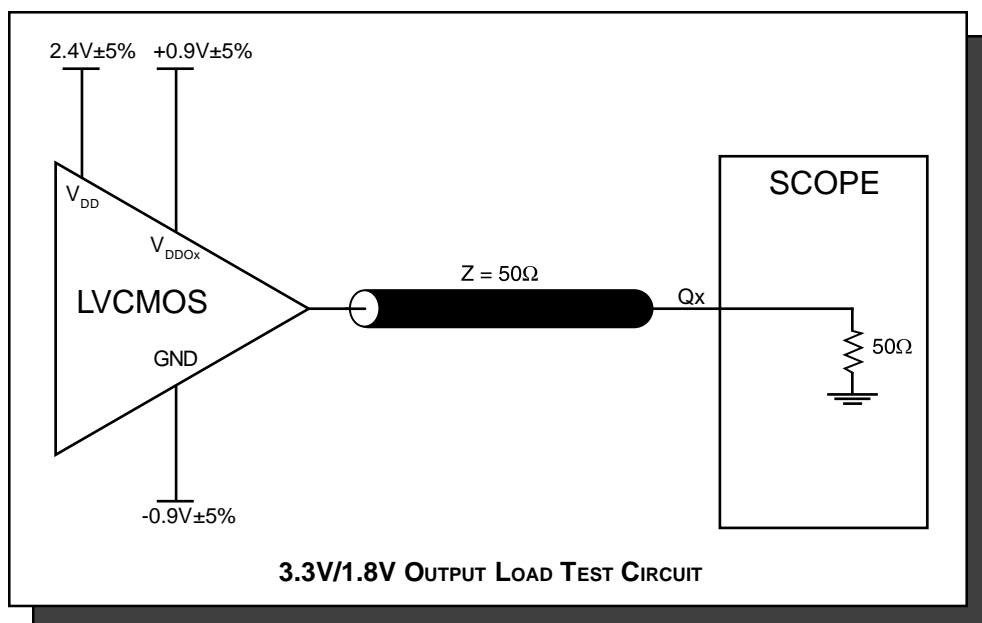




Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016
Low SKEW, 1-TO-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

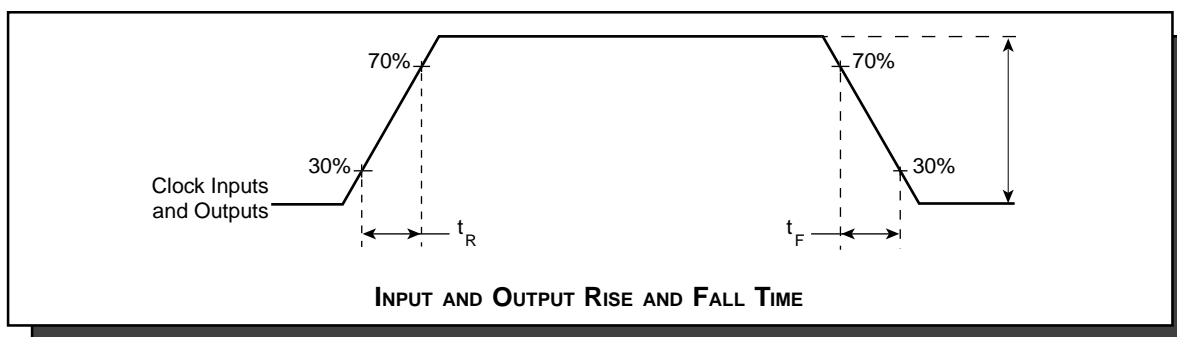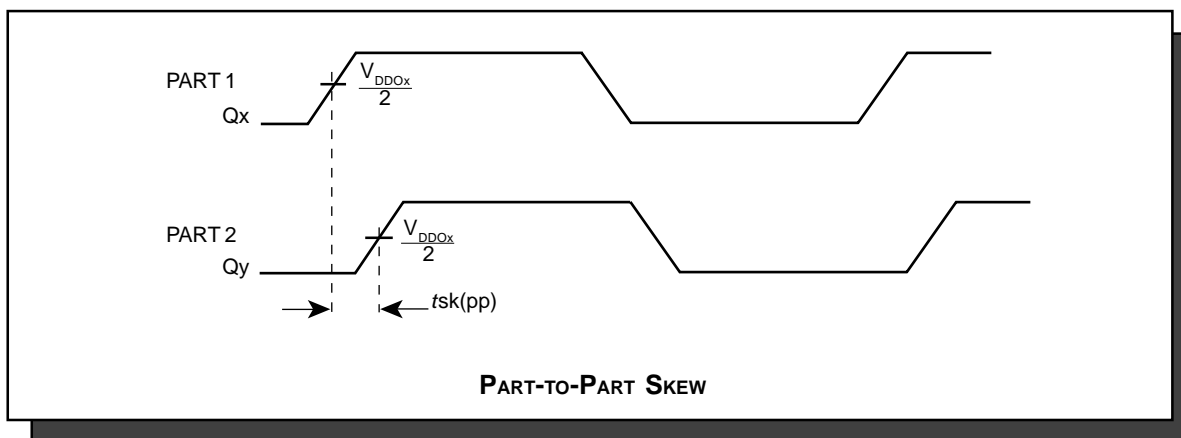
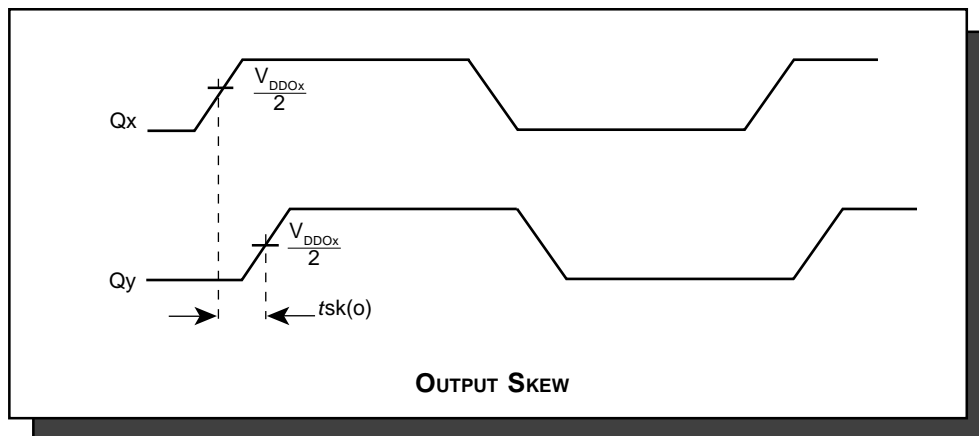




Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016
LOW SKEW, 1-TO-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

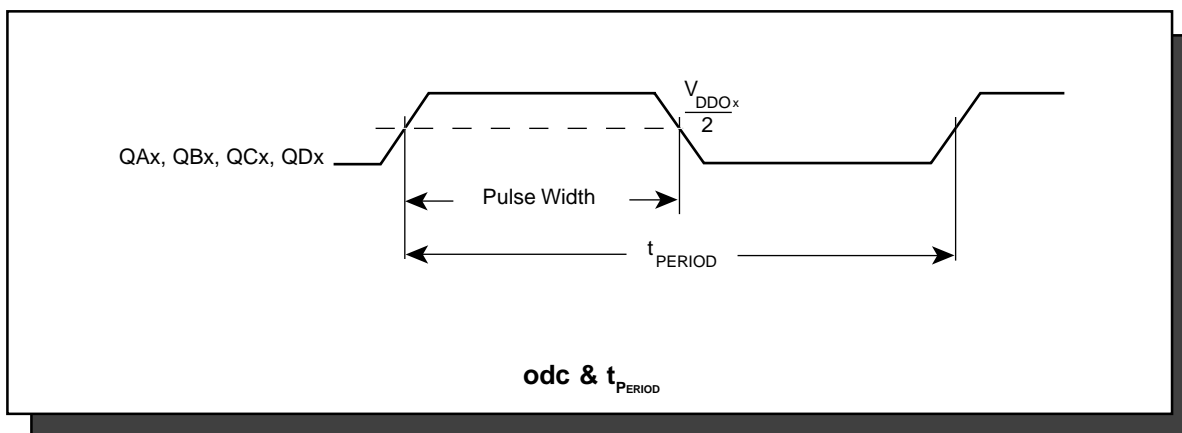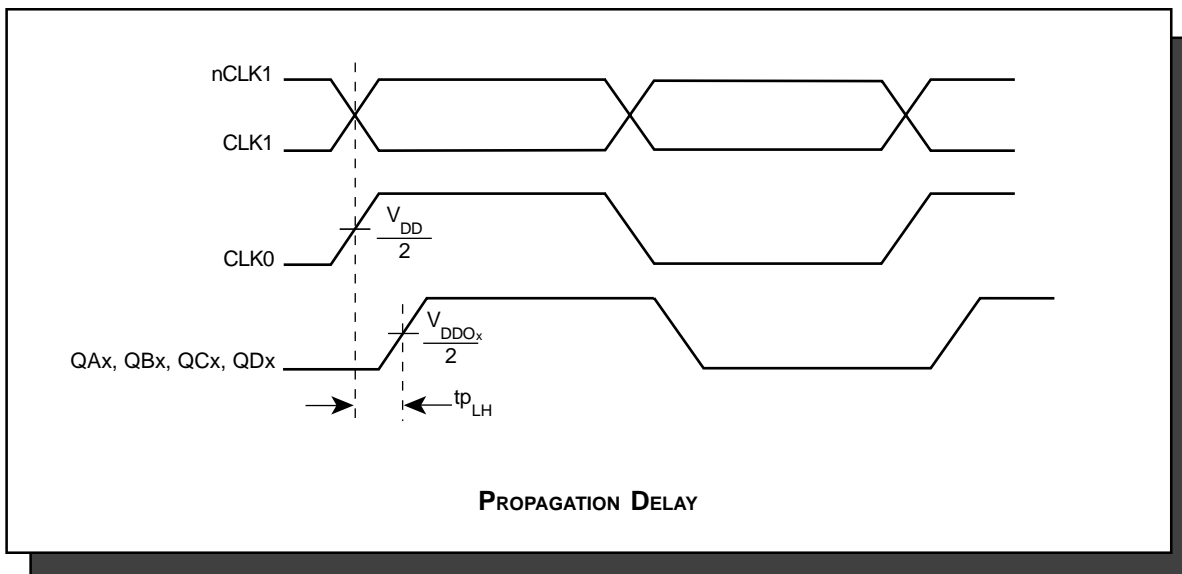




APPLICATION INFORMATION

WIRING THE DIFFERENTIAL INPUT TO ACCEPT SINGLE ENDED LEVELS

Figure 1 shows how the differential input can be wired to accept single ended levels. The reference voltage $V_{REF} = V_{DD}/2$ is generated by the bias resistors R1, R2 and C1. This bias circuit should be located as close as possible to the input pin. The ratio of R1 and R2 might need to be adjusted to position the V_{REF} in the center of the input voltage swing. For example, if the input clock swing is only 2.5V and $V_{DD} = 3.3V$, V_{REF} should be 1.25V and $R2/R1 = 0.609$.

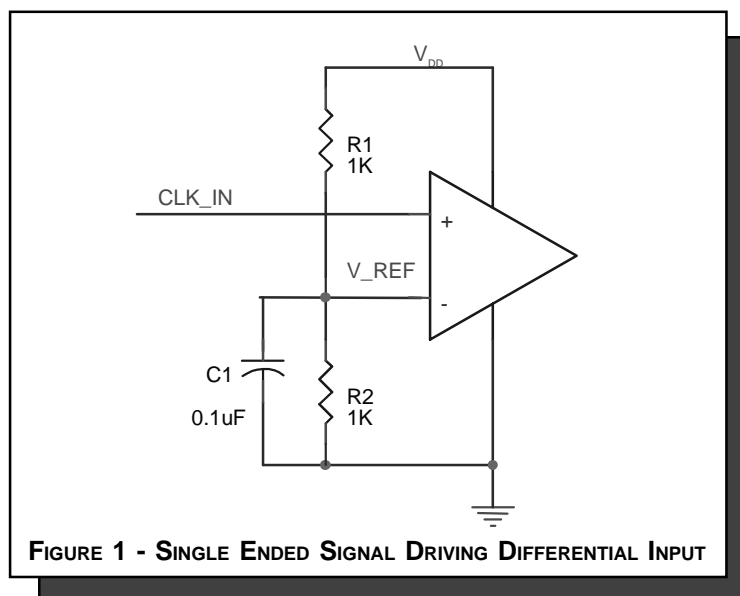



RELIABILITY INFORMATION

TABLE 6. θ_{JA} VS. AIR FLOW TABLE

θ_{JA} by Velocity (Linear Feet per Minute)			
	0	200	500
Single-Layer PCB, JEDEC Standard Test Boards	67.8°C/W	55.9°C/W	50.1°C/W
Multi-Layer PCB, JEDEC Standard Test Boards	47.9°C/W	42.1°C/W	39.4°C/W
NOTE: Most modern PCB designs use multi-layered boards. The data in the second row pertains to most designs.			

TRANSISTOR COUNT

The transistor count for ICS87016 is: 2034



Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016

LOW SKEW, 1-TO-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

PACKAGE OUTLINE - Y SUFFIX

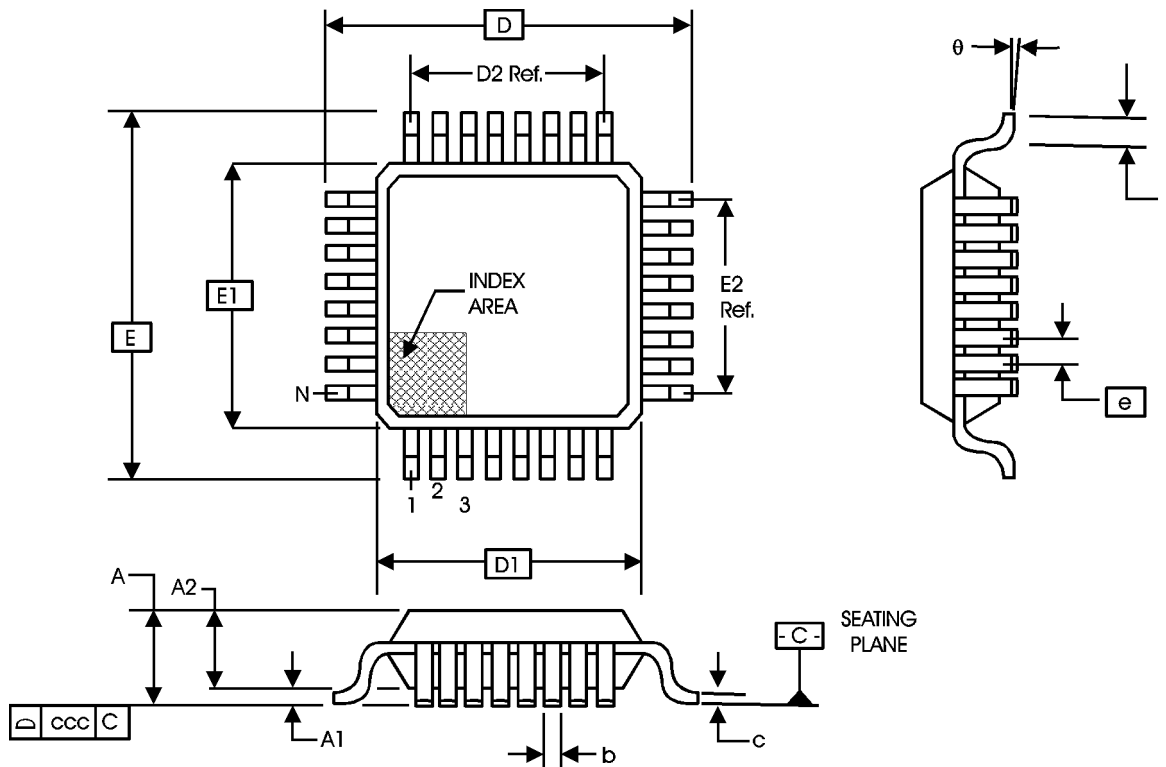


TABLE 7. PACKAGE DIMENSIONS

JEDEC VARIATION ALL DIMENSIONS IN MILLIMETERS			
SYMBOL	BBC		
	MINIMUM	NOMINAL	MAXIMUM
N	48		
A	--	--	1.60
A1	0.05	--	0.15
A2	1.35	1.40	1.45
b	0.17	0.22	0.27
c	0.09	--	0.20
D	9.00 BASIC		
D1	7.00 BASIC		
D2	5.50 Ref.		
E	9.00 BASIC		
E1	7.00 BASIC		
E2	5.50 Ref.		
e	0.50 BASIC		
L	0.45	0.60	0.75
θ	0°	--	7°
ccc	--	--	0.08

Reference Document: JEDEC Publication 95, MS-026



Integrated
Circuit
Systems, Inc.

PRELIMINARY

ICS87016
LOW SKEW, 1-TO-16
DIFFERENTIAL-TO-LVCMOS CLOCK GENERATOR

TABLE 8. ORDERING INFORMATION

Part/Order Number	Marking	Package	Count	Temperature
ICS87016AY	ICS87016AY	48 Lead LQFP	250 per tray	0°C to 70°C
ICS87016AYT	ICS87016AY	48 Lead LQFP on Tape and Reel	1000	0°C to 70°C

While the information presented herein has been checked for both accuracy and reliability, Integrated Circuit Systems, Incorporated (ICS) assumes no responsibility for either its use or for infringement of any patents or other rights of third parties, which would result from its use. No other circuits, patents, or licenses are implied. This product is intended for use in normal commercial applications. Any other applications such as those requiring extended temperature range, high reliability, or other extraordinary environmental requirements are not recommended without additional processing by ICS. ICS reserves the right to change any circuitry or specifications without notice. ICS does not authorize or warrant any ICS product for use in life support devices or critical medical instruments.