
HM6216255H Series

262114-word $\times$ 16-bit High Speed CMOS Static RAM

HITACHI

ADE-203-763(Z)

Preliminary

Rev. 0.0

Mar. 27, 1997

Description

The HM6216255H Series is an asynchronous high speed static RAM organized as 256-k word $\times$ 16-bit. It has realized high speed access time by employing CMOS process and high speed circuit designing technology. It is most appropriate for the application which requires high speed, high density memory and wide bit width configuration, such as cache and buffer memory in system. It is packaged in 400-mil 44-pin plastic SOJ.

Features


- Single 5.0 Vsupply : 5.0 V $\pm$ 10 %
- Access time: 10 ns/12 ns/15 ns (max)
- Completely static memory
 - No clock or timing strobe required
- Equal access and cycle times
- Directly TTL compatible
 - All inputs and outputs
- Center V_{CC} and V_{SS} type pinout

Ordering Information

Type No.	Access time	Package
HM6216255HJP-10	10 ns	400-mil 44-pin plastic SOJ (CP-44D)
HM6216255HJP-12	12 ns	
HM6216255HJP-15	15 ns	
HM6216255HLJP-10	10 ns	
HM6216255HLJP-12	12 ns	
HM6216255HLJP-15	15 ns	

Preliminary: The specifications of this device are subject to change without notice. Please contact to your nearest Hitachi's sales Dept. regarding specifications.


Pin Arrangement

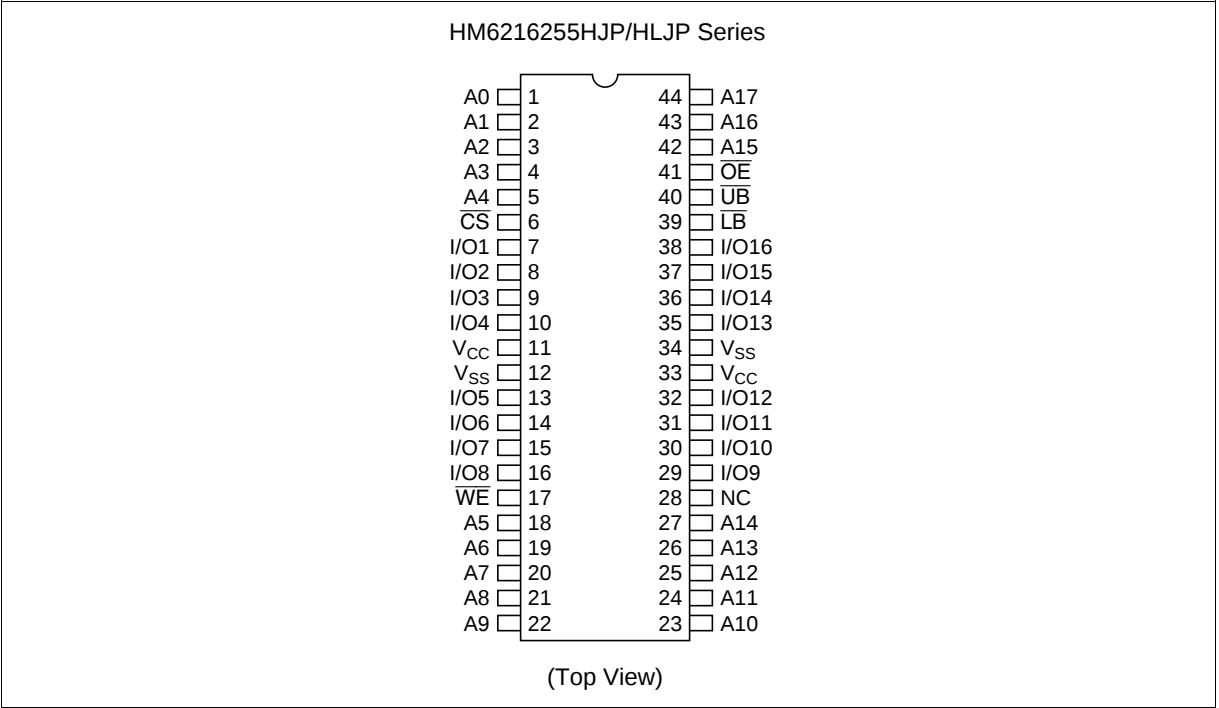

Pin Description

Pin name	Function
A0 – A17	Address input
I/O1 – I/O16	Data input/output
$\overline{CS}$	Chip select
$\overline{OE}$	Output enable
$\overline{WE}$	Write enable
$\overline{UB}$	Upper byte select
$\overline{LB}$	Lower byte select
V_{CC}	Power supply
V_{SS}	Ground
NC	No connection

Block Diagram

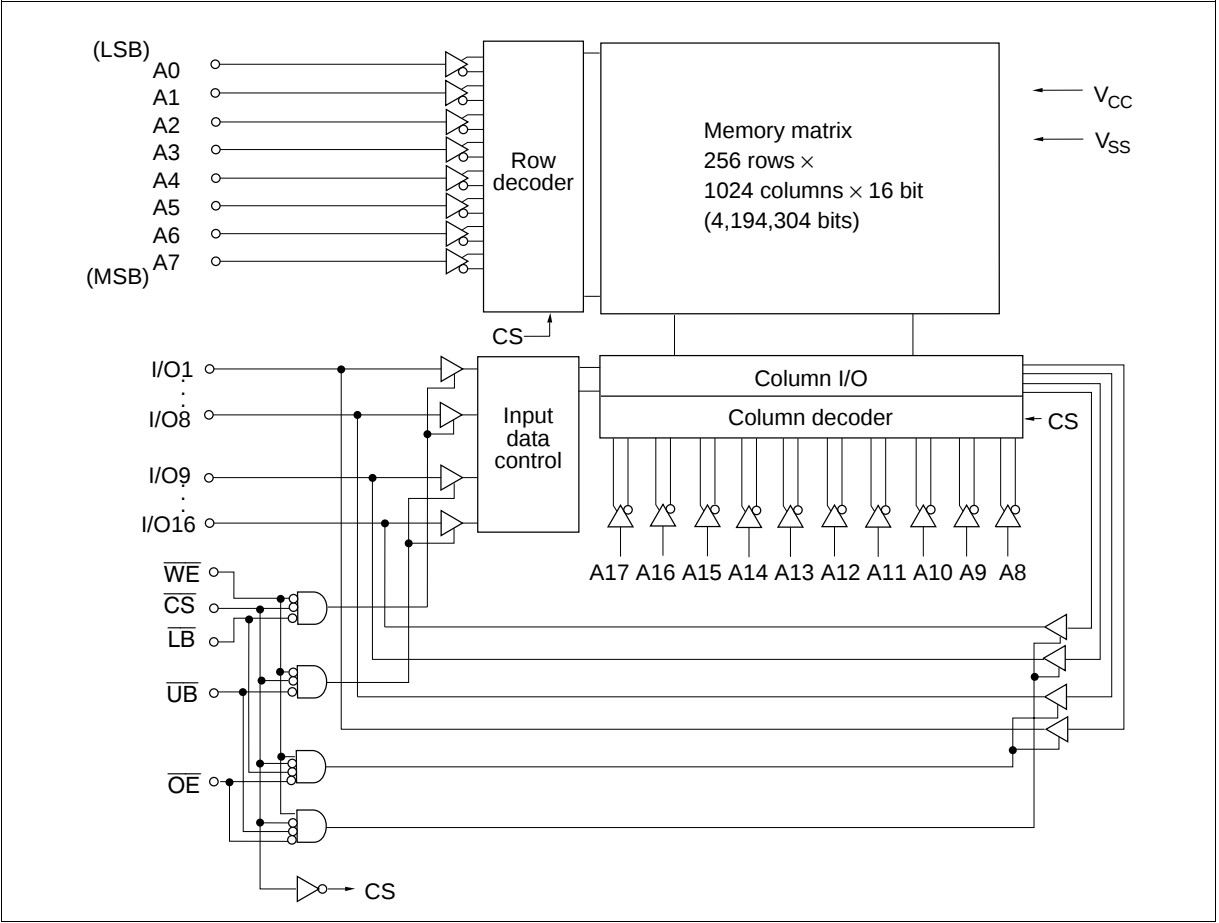

Function Table

$\overline{CS}$	$\overline{OE}$	$\overline{WE}$	$\overline{LB}$	$\overline{UB}$	Mode	V_{CC} current	I/O1–I/O8	I/O9–I/O16	Ref. cycle
H	x	x	x	x	Standby	I_{SB}, I_{SB1}	High-Z	High-Z	—
L	H	H	x	x	Output disable	I_{CC}	High-Z	High-Z	—
L	L	H	L	L	Read	I_{CC}	Output	Output	Read cycle
L	L	H	L	H	Lower byte read	I_{CC}	Output	High-Z	Read cycle
L	L	H	H	L	Upper byte read	I_{CC}	High-Z	Output	Read cycle
L	L	H	H	H	—	I_{CC}	High-Z	High-Z	—
L	x	L	L	L	Write	I_{CC}	Input	Input	Write cycle
L	x	L	L	H	Lower byte write	I_{CC}	Input	High-Z	Write cycle
L	x	L	H	L	Upper byte write	I_{CC}	High-Z	Input	Write cycle
L	x	L	H	H	—	I_{CC}	High-Z	High-Z	—

Note: x: H or L

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply voltage relative to V _{SS}	V _{CC}	−0.5 to +7.0	V
Voltage on any pin relative to V _{SS}	V _T	−0.5* ¹ to V _{CC} + 0.5	V
Power dissipation	P _T	1.0* ² / 1.5* ³	W
Operating temperature	Topr	0 to +70	°C
Storage temperature	Tstg	−55 to +125	°C
Storage temperature under bias	Tbias	−10 to +85	°C

Notes: 1. V_T (min) = −2.5 V for pulse width (under shoot) ≤ 10 ns
2. At still air condition
3. At air flow ≥ 1.0 m/s

Recommended DC Operating Conditions (Ta = 0 to +70°C)

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	V _{CC} * ²	4.5	5.0	5.5	V
	V _{SS} * ³	0	0	0	V
Input voltage	V _{IH}	2.2	—	V _{CC} + 0.5	V
	V _{IL}	−0.5* ¹	—	0.8	V

Notes: 1. −2.0 V for pulse width (under shoot) ≤ 10 ns
2. The supply voltage with all V_{CC} pins must be on the same level.
3. The supply voltage with all V_{SS} pins must be on the same level.

DC Characteristics (Ta = 0 to +70°C, VCC = 5.0 V ± 10 %, VSS = 0 V)

Parameter		Symbol	Min	Typ*1	Max	Unit	Test conditions
Input leakage current		$ I_{LI} $	—	—	2	μA	Vin = VSS to VCC
Output leakage current*1		$ I_{LO} $	—	—	2	μA	Vin = VSS to VCC
Operating power supply current	10 ns cycle	I_{CC}	—	—	300	mA	$\overline{CS} = V_{IL}$, Iout = 0 mA Other inputs = VIH/VIL
	12 ns cycle	I_{CC}	—	—	270		
	15 ns cycle	I_{CC}	—	—	250		
Standby power supply current	10 ns cycle	I_{SB}	—	—	100	mA	$\overline{CS} = V_{IH}$, Other inputs = VIH/VIL
	12 ns cycle	I_{SB}	—	—	100		
	15 ns cycle	I_{SB}	—	—	100		
		I_{SB1}	—	—	10	mA	$V_{CC} \geq \overline{CS} \geq V_{CC} - 0.2\text{ V}$, (1) $0\text{ V} \leq V_{in} \leq 0.2\text{ V}$ or (2) $V_{CC} \geq V_{in} \geq V_{CC} - 0.2\text{ V}$
			—*2	—*2	1.0 *2		
Output voltage		V_{OL}	—	—	0.4	V	IOL = 8 mA
		V_{OH}	2.4	—	—	V	I OH = −4 mA

Note: 1. Typical values are at VCC = 5.0 V, Ta = +25°C and not guaranteed.
2. This characteristics is guaranteed only for L-version.

Capacitance (Ta = 25°C, f = 1.0 MHz)



Parameter		Symbol	Min	Typ	Max	Unit	Test conditions
Input capacitance*1		Cin	—	—	6	pF	Vin = 0 V
Input/output capacitance*1		C _{I/O}	—	—	8	pF	V _{I/O} = 0 V

Note: 1. This parameter is sampled and not 100% tested.

AC Characteristics (Ta = 0 to +70°C, VCC = 5.0 V ± 10 %, unless otherwise noted.)

Test Conditions

- Input pulse levels: 3.0 V/0.0 V
- Input rise and fall time: 3 ns
- Input and output timing reference levels: 1.5 V
- Output load: See figures (Including scope and jig)

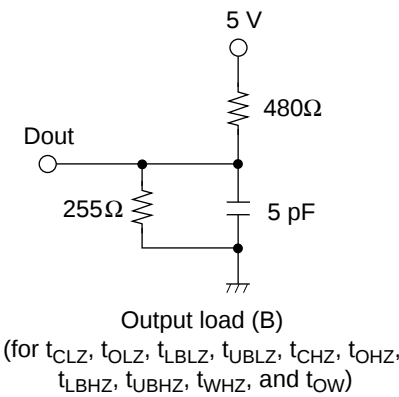

Read Cycle

		HM6216255H							
		-10		-12		-15			
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Unit	Notes
Read cycle time	t _{RC}	10	—	12	—	15	—	ns	
Address access time	t _{AA}	—	10	—	12	—	15	ns	
Chip select access time	t _{ACS}	—	10	—	12	—	15	ns	
Output enable to output valid	t _{OE}	—	5	—	6	—	8	ns	
Byte select to output valid	t _{LB} , t _{UB}	—	5	—	6	—	8	ns	
Output hold from address change	t _{OH}	3	—	3	—	3	—	ns	
Chip select to output in low-Z	t _{CLZ}	3	—	3	—	3	—	ns	1
Output enable to output in low-Z	t _{OLZ}	0	—	0	—	0	—	ns	1
Byte select to output in low-Z	t _{LBLZ} , t _{UBLZ}	0	—	0	—	0	—	ns	1
Chip deselect to output in high-Z	t _{CHZ}	—	5	—	6	—	8	ns	1
Output disable to output in high-Z	t _{OHZ}	—	5	—	6	—	8	ns	1
Byte deselect to output in high-Z	t _{LBHZ} , t _{UBHZ}	—	5	—	6	—	8	ns	1


Write Cycle

		HM6216255H							
		-10		-12		-15			
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Unit	Notes
Write cycle time	t _{WC}	10	—	12	—	15	—	ns	
Address valid to end of write	t _{AW}	6	—	8	—	10	—	ns	
Chip select to end of write	t _{CW}	6	—	8	—	10	—	ns	8
Write pulse width	t _{WP}	6	—	8	—	10	—	ns	7
Byte select to end of write	t _{LBW} , t _{UBW}	6	—	8	—	10	—	ns	9, 10
Address setup time	t _{AS}	0	—	0	—	0	—	ns	5
Write recovery time	t _{WR}	0	—	0	—	0	—	ns	6
Data to write time overlap	t _{DW}	5	—	6	—	8	—	ns	
Data hold from write time	t _{DH}	0	—	0	—	0	—	ns	
Write disable to output in low-Z	t _{OW}	3	—	3	—	3	—	ns	1
Output disable to output in high-Z	t _{OHZ}	—	5	—	6	—	8	ns	1
Write enable to output in high-Z	t _{WHZ}	—	5	—	6	—	8	ns	1


- Notes: 1. Transition is measured ± 200 mV from steady voltage with Load (B). This parameter is sampled and not 100% tested.
2. If the $\overline{CS}$ or $\overline{LB}$ or $\overline{UB}$ low transition occurs simultaneously with the $\overline{WE}$ low transition or after the $\overline{WE}$ transition, output remains a high impedance state.
3. $\overline{WE}$ and/or $\overline{CS}$ must be high during address transition time.
4. If $\overline{CS}$, $\overline{OE}$, $\overline{LB}$ and $\overline{UB}$ are low during this period, I/O pins are in the output state. Then the data input signals of opposite phase to the outputs must not be applied to them.
5. t_{AS} is measured from the latest address transition to the latest of $\overline{CS}$, $\overline{WE}$, $\overline{LB}$ or $\overline{UB}$ going low.
6. t_{WR} is measured from the earliest of $\overline{CS}$, $\overline{WE}$, $\overline{LB}$ or $\overline{UB}$ going high to the first address transition.
7. A write occurs during the overlap of low $\overline{CS}$, low $\overline{WE}$ and low $\overline{LB}$ or low $\overline{UB}$.
8. t_{CW} is measured from the later of $\overline{CS}$ going low to the end of write.
9. t_{LBW} is measured from the later of $\overline{LB}$ going low to the end of write.
10. t_{UBW} is measured from the later of $\overline{UB}$ going low to the end of write.

Timing Waveforms


Read Timing Waveform (1) ($\overline{WE} = V_{IH}$)

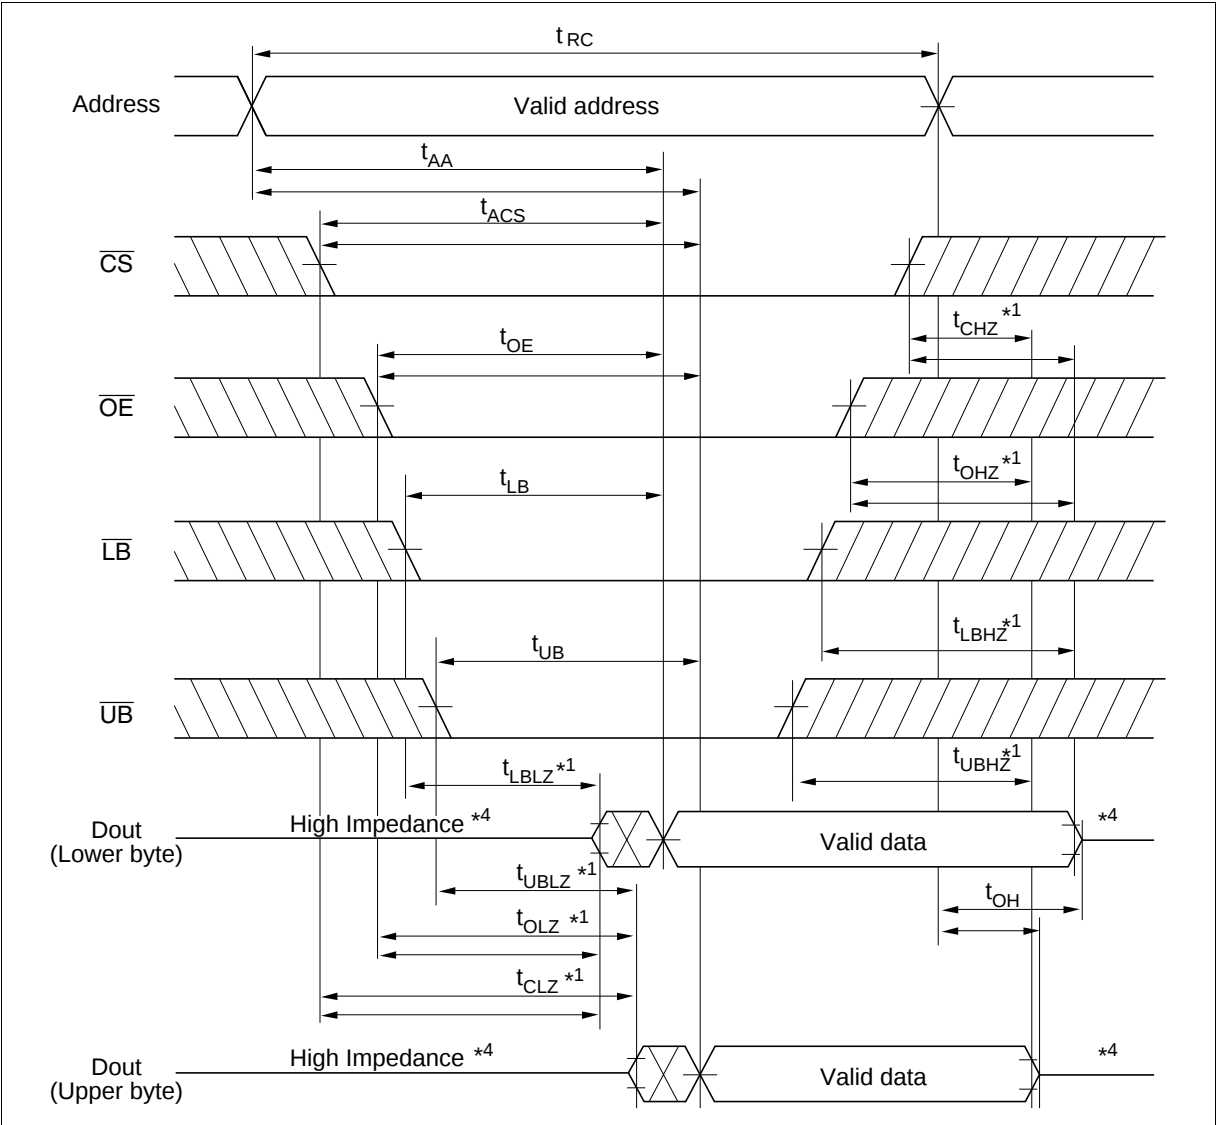


Read Timing Waveform (2) ($\overline{\text{WE}} = V_{\text{IH}}$, $\overline{\text{LB}} = V_{\text{IL}}$, $\overline{\text{UB}} = V_{\text{IL}}$)

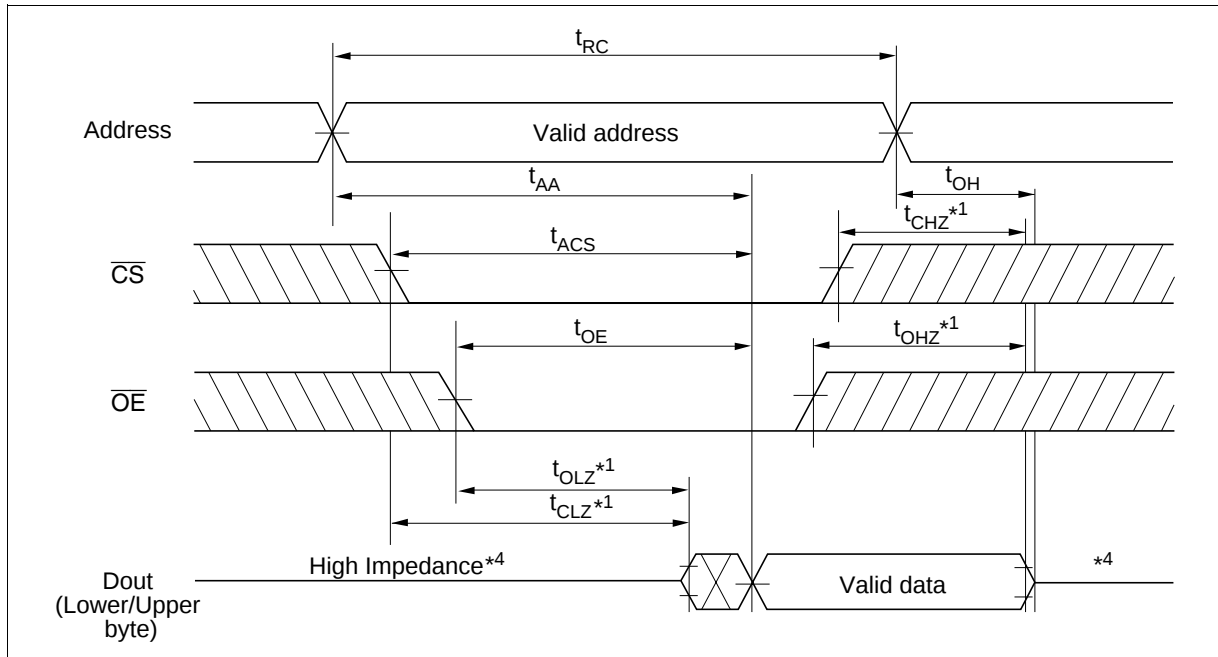


Write Timing Waveform (1) ($\overline{\text{LB}}$, $\overline{\text{UB}}$ Controlled)

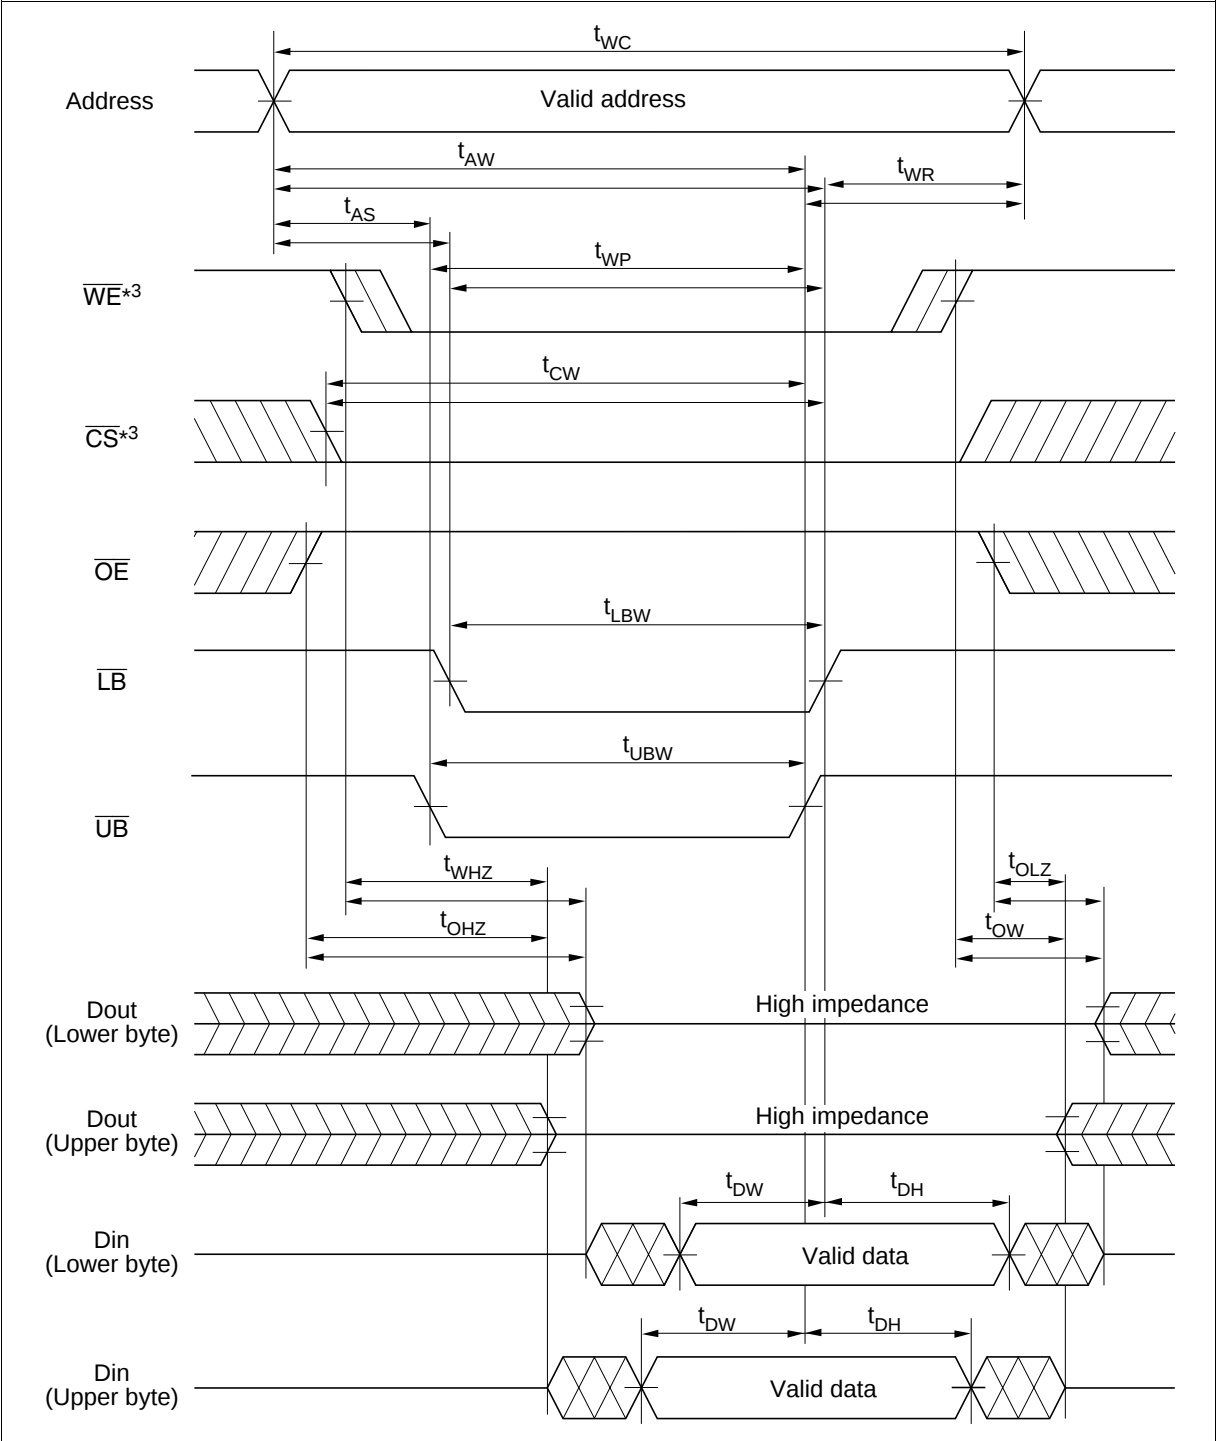

Write Timing Waveform (2) ($\overline{WE}$ Controlled)

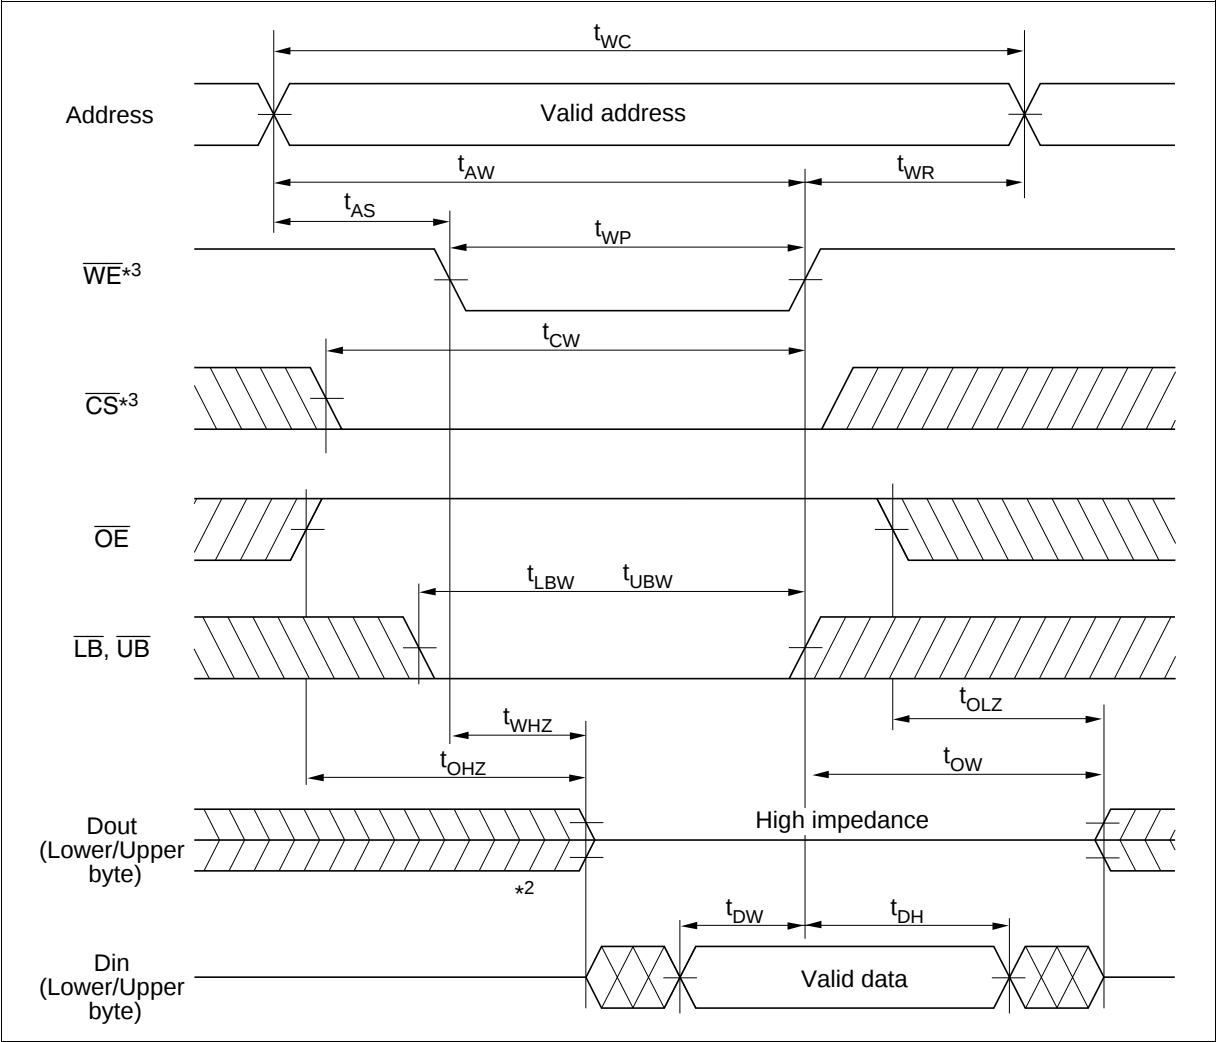

Write Timing Waveform (3) ($\overline{\text{CS}}$ Controlled)

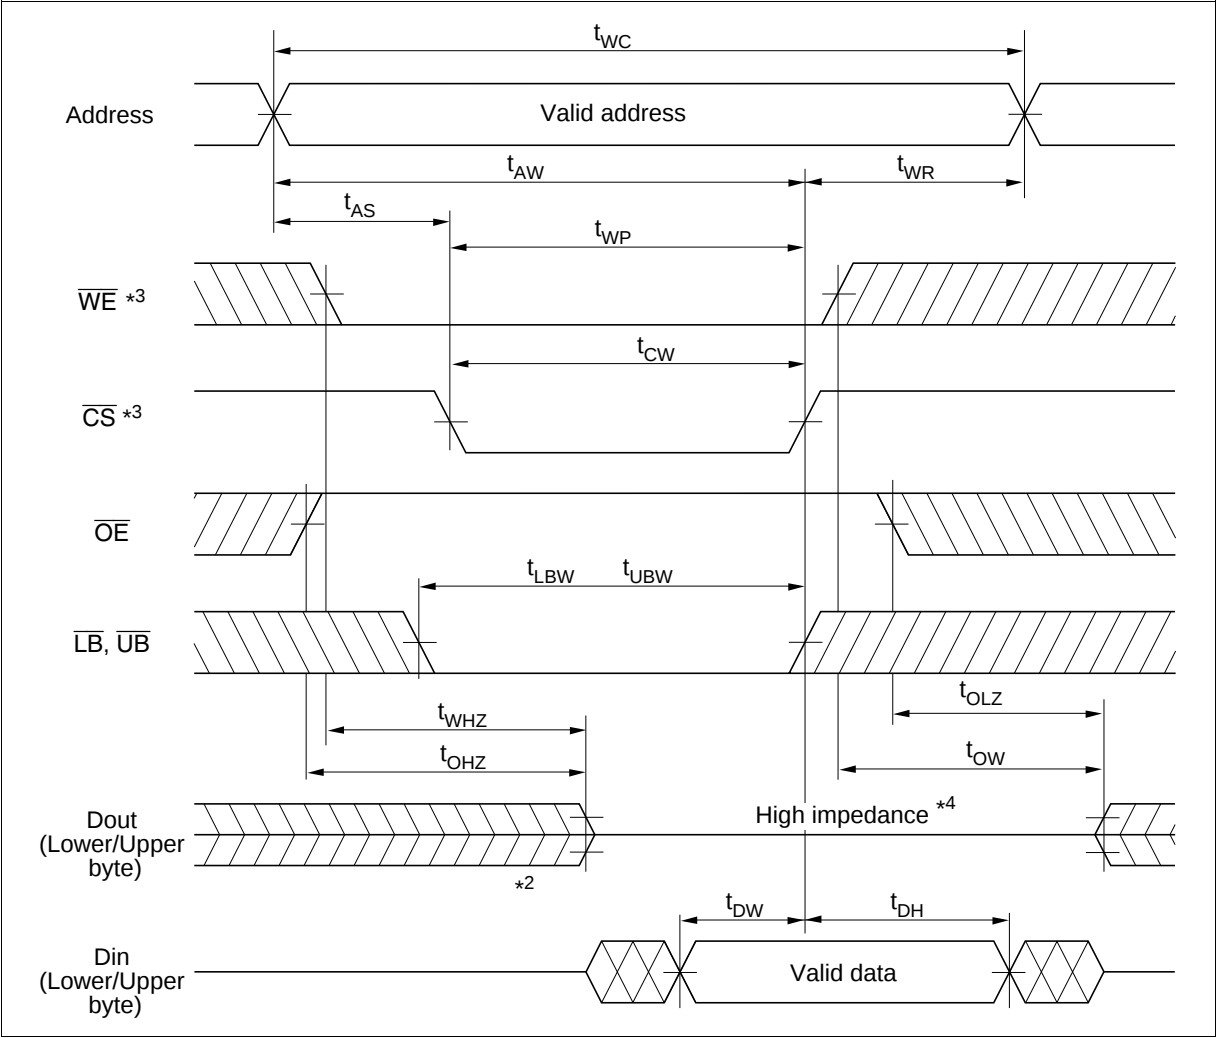


Low V_{CC} Data Retention Characteristics (Ta = 0 to +70°C)

This characteristics is guaranteed only for L-version.

Parameter	Symbol	Min	Typ*1	Max	Unit	Test conditions
V _{CC} for data retention	V _{DR}	2.0	—	—	V	V _{CC} ≥ $\overline{CS}$ ≥ V _{CC} − 0.2 V, (1) 0 V ≤ Vin ≤ 0.2 V or (2) V _{CC} ≥ Vin ≥ V _{CC} − 0.2 V
Data retention current	I _{CCDR}	—	2	300	μA	V _{CC} = 3 V V _{CC} ≥ $\overline{CS}$ ≥ V _{CC} − 0.2 V, (1) 0 V ≤ Vin ≤ 0.2 V or (2) V _{CC} ≥ Vin ≥ V _{CC} − 0.2 V
Chip deselect to data retention time	t _{CDR}	0	—	—	ns	See retention waveform
Operation recovery time	t _r	5	—	—	ms	

Note: 1. Typical values are at V_{CC} = 3.0 V, Ta = 25°C, and not guaranteed.

Low V_{CC} Data Retention Timing Waveform

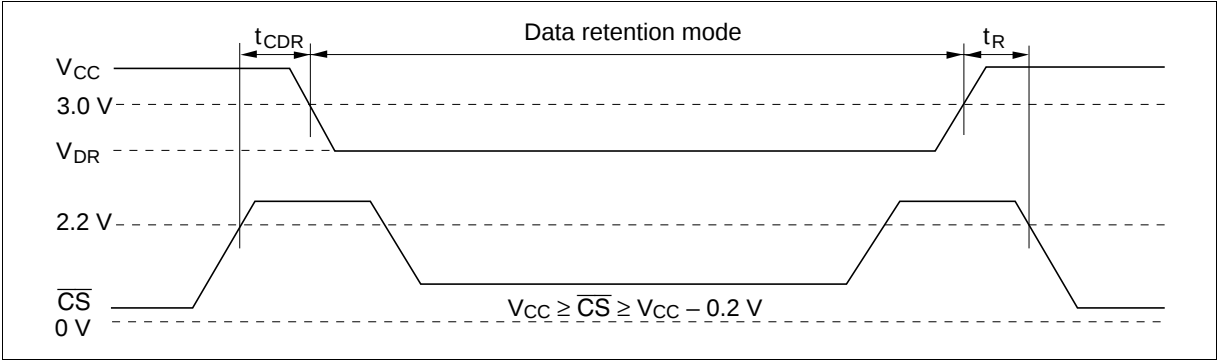


HM6216255H Series

Package Dimensions

HM6216255HJP/HLJP Series (CP-44D)

Unit: mm

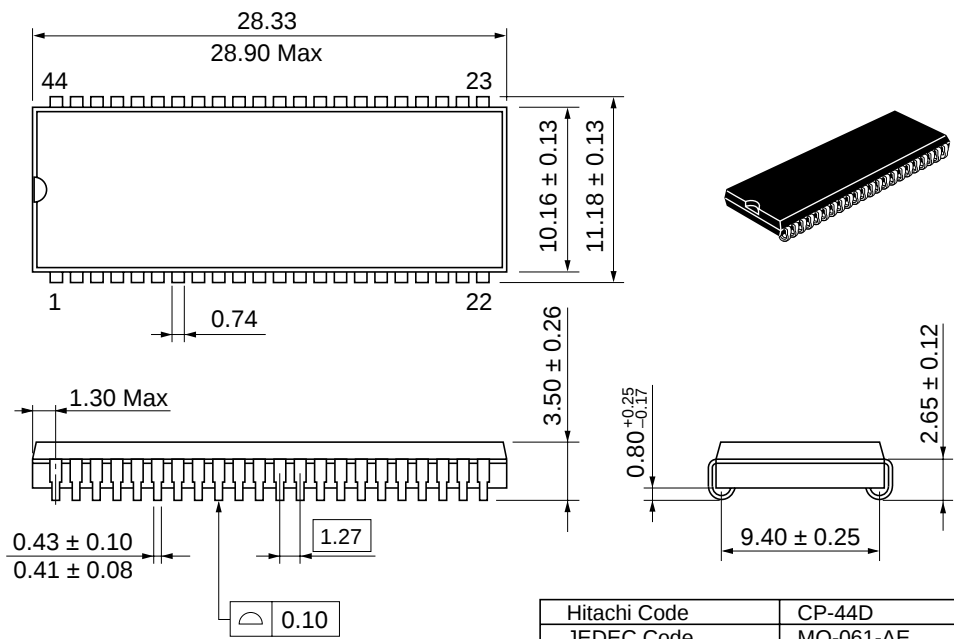

Hitachi Code	CP-44D
JEDEC Code	MO-061-AE
EIAJ Code	—
Weight	1.8 g

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

HITACHI

Hitachi, Ltd.

Semiconductor & IC Div.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100, Japan
Tel: Tokyo (03) 3270-2111
Fax: (03) 3270-5109

For further information write to:

Hitachi America, Ltd.
Semiconductor & IC Div.
2000 Sierra Point Parkway
Brisbane, CA. 94005-1835
U S A
Tel: 415-589-8300
Fax: 415-583-4207

Hitachi Europe GmbH
Electronic Components Group
Continental Europe
Dornacher Straße 3
D-85622 Feldkirchen
München
Tel: 089-9 91 80-0
Fax: 089-9 29 30 00

Hitachi Europe Ltd.
Electronic Components Div.
Northern Europe Headquarters
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA
United Kingdom
Tel: 0628-585000
Fax: 0628-778322

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 0104
Tel: 535-2100
Fax: 535-1533

Hitachi Asia (Hong Kong) Ltd.
Unit 706, North Tower,
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon
Hong Kong
Tel: 27359218
Fax: 27306071

HM6216255H Series

Revision Record

Rev.	Date	Contents of Modification	Drawn by	Approved by
0.0	Mar. 27, 1997	Initial issue		
