

Ceramic Monoblock Bandpass Filter



Model KFF6352A Technical Data

Features:

- Small Size
- High Performance
- SMD

Description and Applications:

This 3 pole monoblock filter is primarily designed for ISM applications at 915 MHz.



Electrical Specifications


Parameters	Frequency	Specifications @ 25° C
Insertion Loss	902 MHz to 928 MHz	3.0 dB max.
Forward Return Loss		10.0 dB min.
Attenuation	885 MHz	24.0 dB min.
Power Rating		1 W
Impedance		50 Ω

NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification	Typical Allowance
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

Rev. 1


Typical Response Curve

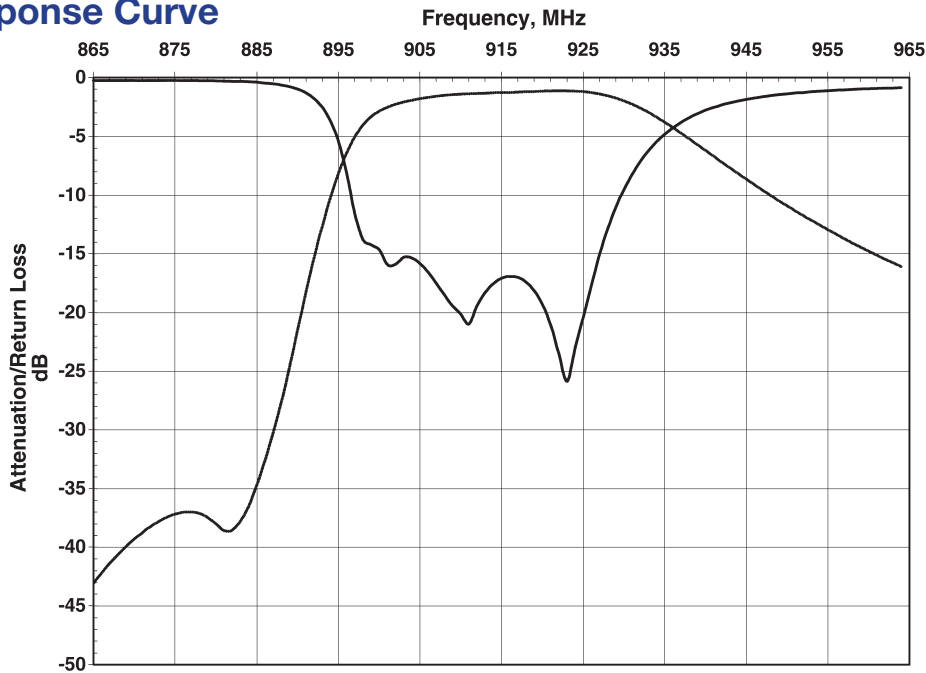

Mechanical Dimensions

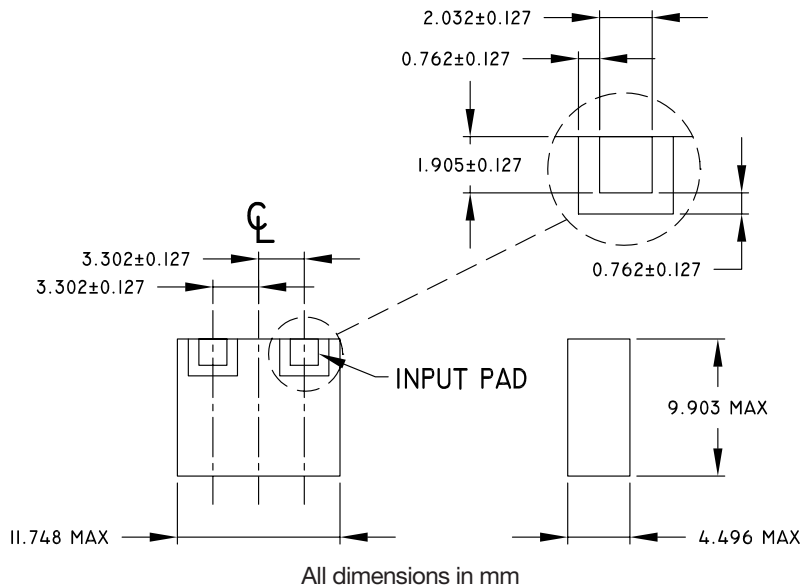


PC Board Layout

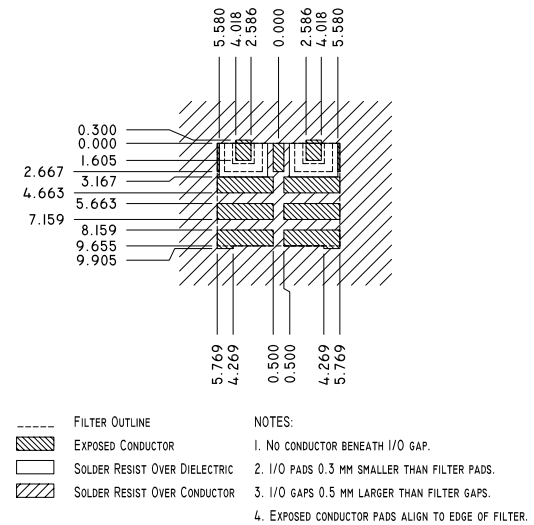


Part Marking

Y = LAST DIGIT OF YEAR
 WW = SEQUENTIAL WEEK NUMBER



Packaging

Reel Quantity: 800 pcs. max.
 Reel Weight: 4 lbs. max.

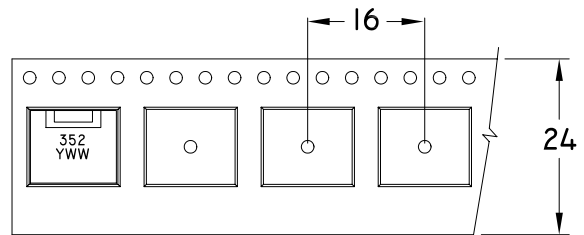

Contact Information:

CTS WIRELESS COMPONENTS, INC. / 171 Covington Drive / Bloomingdale, IL 60108
 PHONE: (800) 757-6686 / www.ctscorp.com

Document Control #6287070Y01 Rev 1
 Date of Origin 05/14/01
 Date of Revision 05/14/01

THIS DATA SHEET IS NOT AN OFFER FOR SALE AND SHALL NOT OBLIGATE CTS TO SELL THE PRODUCTS DESCRIBED HEREIN OR ANY OTHER PRODUCTS. CTS MAY, IN ITS SOLE DISCRETION, MODIFY OR DISCONTINUE THE SALE OF ITS PRODUCTS AT ANY TIME WITHOUT NOTICE. CTS MAKES NO WARRANTY, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE PRODUCTS REFERENCED OR INFORMATION PROVIDED HEREIN.

CTS® is a registered trademark of CTS Corporation.