

VARIABLE CAPACITANCE DIODE

FEATURES

- Excellent Linearity (CV Curve)
- Large Capacitance Ratio ($A = 3.70$ minimum) with Low Series Resistance
- Two Diodes in a 3 Lead Through-Hole Discrete Package (TO92-3)
- Very Small Capacitance Deviation at Tape/Reel

APPLICATIONS

- FM Radio
- Voltage Controlled Oscillator

DESCRIPTION

The KV1330NT variable capacitance diode was specially made to be used as tuning elements in car radios, radio cassettes, stereos, and other consumer radios. The KV1330NT is suitable for wide band tuning from 76 to 108 MHz.

If the KV1330NT is used only for FM reception, it is possible to operate it at 4.5 V so it is very useful in lowering the power demands of the set.

CLASSIFICATION


(Unit: pF)

RANK		1	2	3	4
C	MIN	69.14	71.09	73.09	75.15
	MAX	71.23	73.24	75.31	77.43

ORDERING INFORMATION

KV1330NT

Note: The KV1330NT is supplied on folded paper tape (25 pieces per fold) 1500 pcs per box.

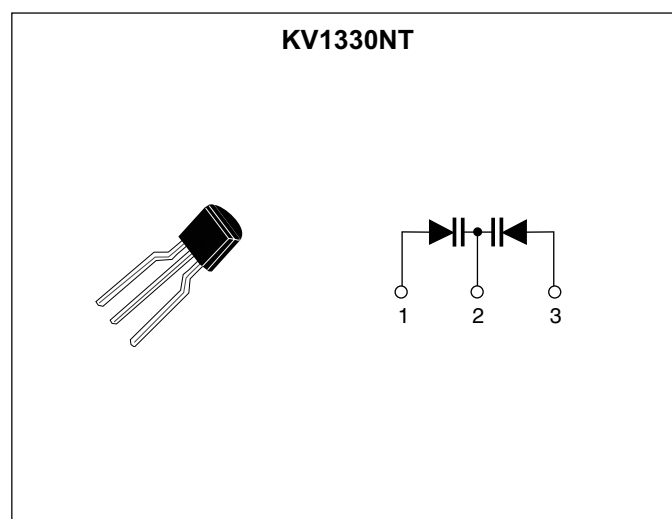

KV1330NT

ABSOLUTE MAXIMUM RATINGS

Reverse Voltage 18V
Forward Current 50 mA
Power Dissipation 100 mW

Storage Temperature Range -55 to +150 °C
Operating Temperature Range -55 to +85 °C

ELECTRICAL CHARACTERISTICS

Test conditions: $T_A = 25\text{ °C}$







SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{REV}	Reverse Voltage	$I_{REV} = 10\text{ }\mu\text{A}$	16			V
I_{REV}	Reverse Current	$V_{REV} = 10.0\text{ V}$			100	nA
C_2	Diode Capacitance 2	$V_{REV} = 2.0\text{ V}$, $f = 1\text{ MHz}$	69.14		77.43	pF
C_4	Diode Capacitance 4	$V_{REV} = 4.0\text{ V}$, $f = 1\text{ MHz}$	43.09		56.24	pF
C_6	Diode Capacitance 6	$V_{REV} = 6.0\text{ V}$, $f = 1\text{ MHz}$	25.05		34.57	pF
C_9	Diode Capacitance 9	$V_{REV} = 9.0\text{ V}$, $f = 1\text{ MHz}$	15.44		20.10	pF
R_S	Series Resistance	$V_{REV} = 2.0\text{ V}$, $f = 70\text{ MHz}$			0.5	Ω
A	Capacitance Ratio	C_2 / C_9	3.70		5.00	

Note 1: Diode Capacitance measured with HP 4279A or equivalent instruments (at OSC level 20 mVrms, $\pm 5\text{ mVrms}$).

Note 2: Series Resistance measured with HP 4191A or equivalent instruments.


Note 3: The tolerance of two adjacent parts on a reel is within 3% at C2, C3, C6, and C9.

TYPICAL PERFORMANCE CHARACTERISTICS

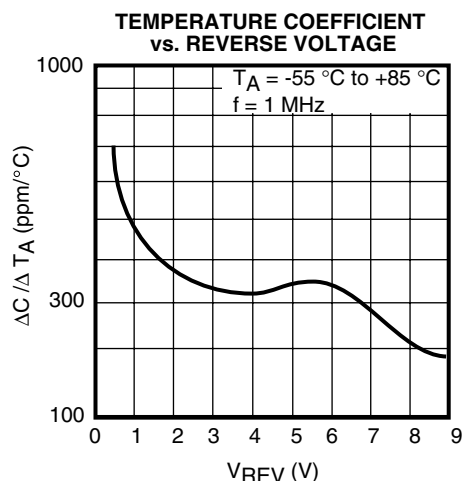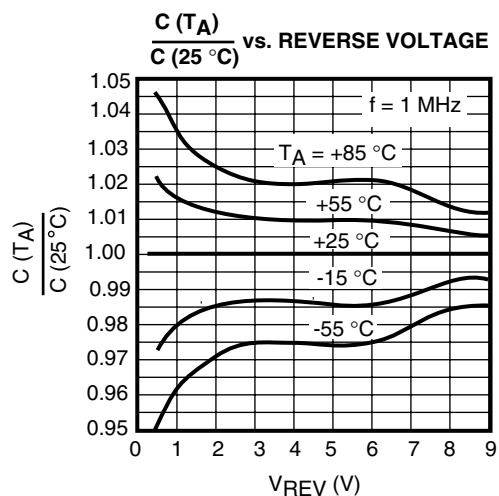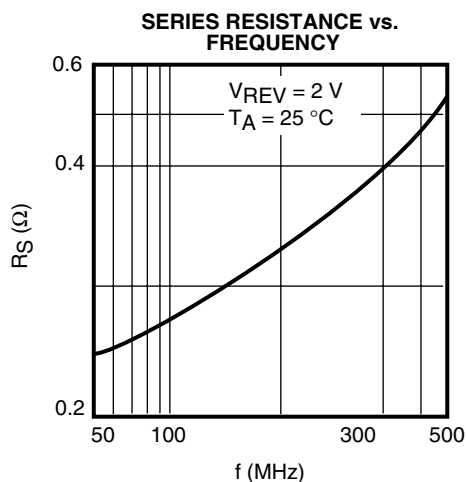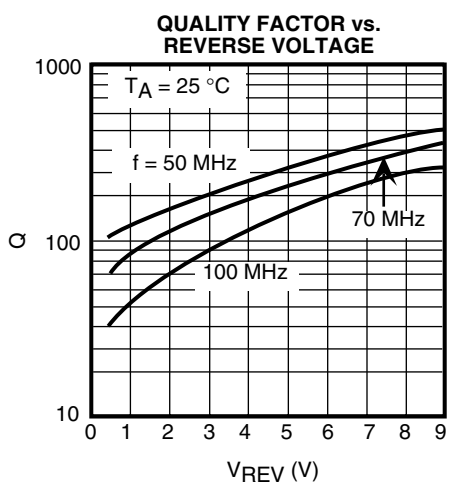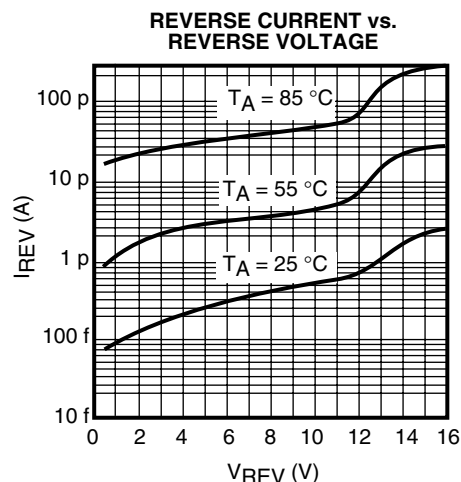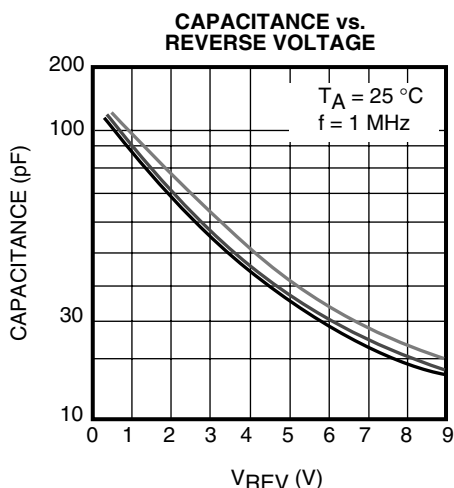

PACKAGE OUTLINE

T092-3

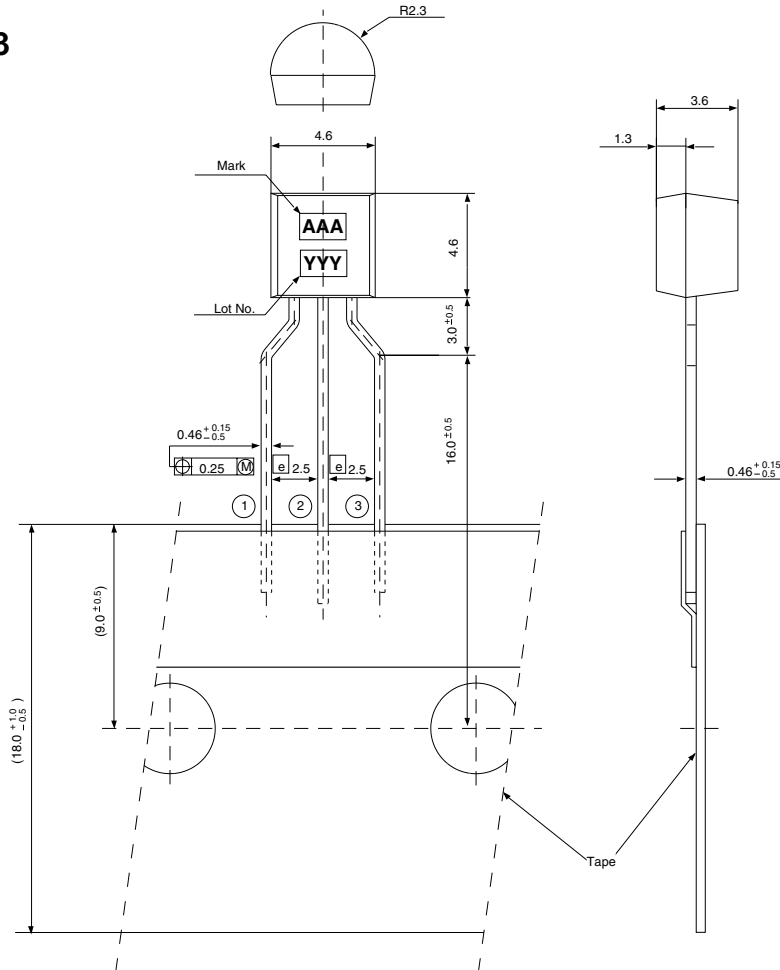

Marking Information

Product Code 330



Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street, Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.